

SPEKTRUM+ SERIES

120V AC Smart Lamp - BR30

Spektrum+ RGBTW lamps offer whole home IoT lighting using Bluetooth® mesh connectivity. Simply install using existing light fixtures and control wirelessly from the convenience of your tablet or smart phone with the Spektrum+ Smart Lighting app. The BR30 flood light will be sure to add a pop of color and is as easy as simply replacing an old lamp with a new one.

- RGB + Tunable White (2700K-6000K) in one lamp
- Excellent color rendering with 90+ CRI
- Up to 650 lumen output performance
- Control via Spektrum+ app or Spektrum Smart Switch
- cETLus Listed - Damp Location Rated, FCC Compliant



SPEKTRUM+ BR30 QUICK SPECS

| | |
|-----------------------|--|
| VOLTAGE | 120V AC |
| WATTAGE | 9W |
| LUMENS | 650Lm |
| COLOR/CCT | RGB + Tunable White (2700K-6000K) |
| CRI | 90+ |
| DIMMING | Spektrum+ app (0-100%)* |
| BASE | E26 |
| BEAM ANGLE | 110° |
| OPERATING TEMP | -10°C (14°F) to 45°C (113°F) |
| CERTIFICATIONS | cULus Listed - Damp Locations, FCC Compliant |
| RATED LIFE | 25,000 Hours |

*Not intended for use with a standard wall switch dimmer. Use only with Spektrum+ Smart App or Spektrum+ Smart Switch control (sold separately)

PROJECT: _____


TYPE: _____

LOCATION: _____


CATALOG NUMBER: _____



SPEKTRUM+ BR30 QUICK DIMENSIONS

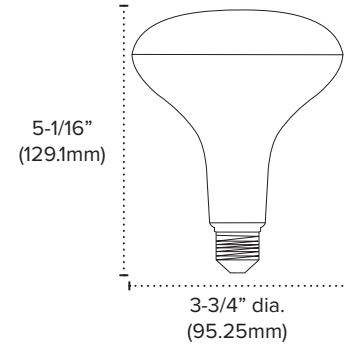

SPEKTRUM+ BR30 QUICK SET-UP

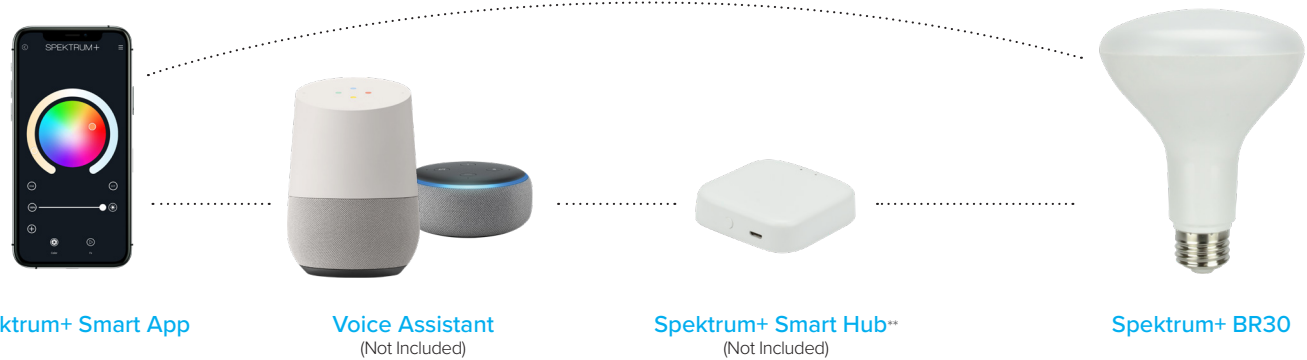

****Spektrum+ Smart Hub Required for automation features and use with voice assistants**

SPEKTRUM+ BR30 ORDERING INFORMATION

| ITEM NUMBER | DESCRIPTION | BASE | VOLTAGE | CCT | CRI | LUMENS | WATTAGE | DIMMING |
|------------------|-------------|------|---------|-------|-----|--------|---------|----------------|
| SPKPL-BR30-RGBTW | BR30 | E26 | 120V AC | RGBTW | 90+ | 650Lm | 9W | App Controlled |

SPEKTRUM+ BR30 ACCESSORIES

| ITEM NUMBER | DESCRIPTION |
|--------------------|---------------------------------|
| SPKPL-CTRL-W-RGBTW | Spektrum+ Bluetooth® Controller |
| SPKPL-GTWY* | WiFi to Bluetooth® Smart Hub |



SPKPL-CTRL-W-RGBTW



SPKPL-GTWY

*Gateway recommended for use in every Spektrum+ application for full app functionality.

SPEKTRUM+ NOTES

CONTROLLING THE FIXTURE: The attached LED controller/receiver utilizes Bluetooth Wireless Technology and can be controlled via the Spektrum+ Smart Lighting App and/or the Spektrum+ Smart Switch (SPKPL-CTRL-W-RGBTW - sold separately). It is not intended to be used with a standard dimmer switch.

DISTANCE OF CONTROL CAPABILITY: 25 meters (approx. 80ft)

RESET THE DEVICE: Power the device ON and OFF x 3 times in succession. The device will pulse BLUE once reset and ready to be paired.

USING THE SPEKTRUM+ SMART LIGHTING APP: Please follow the Spektrum+ Smart Lighting App guide.

SPEKTRUM+ SIGNAL ATTENUATION

All claims related to signal distance are based on clear line of sight. Any obstacles impeding direct line of sight will significantly reduce the effective distance of the product. Increasing density and thickness of obstacles will further decrease the signal distance.

Material Interference Table

| MATERIAL | POTENTIAL FOR RANGE REDUCTION |
|----------|-------------------------------|
| Wood | Low |
| Glass | Low |
| Brick | Medium |
| Marble | Medium |
| Plaster | High |
| Concrete | High |
| Metal | Very High |

Best practices/troubleshooting tactics include:

- Devices using the same RF band can interfere with each other's communication. Though they cannot communicate directly, they may be able to inject noise into another system. If you experience this, the best practice is move the inadvertent receiver(s)/transmitter(s) to an alternate location or to place a barrier between the inadvertent receiver(s)/transmitter(s).
- If a receiver must be moved out of sight, make sure that the receiver is not fully enclosed and that the receiver is placed as close to the opening as possible. The signal will be able to be reflected around a corner at reduced strength.
- If an antenna is used, the signal is strongest in directions perpendicular to the direction the antenna is pointing.
- A cellphone camera can be used to test if an IR remote is transmitting a signal. Even though the infrared band is invisible to humans, the cellphone camera will pick up the IR light and display it on the screen as either a red or white light. If pressing a button does not show a light on the cellphone screen, the batteries are most likely dead and need to be replaced.