

ELAN Pendant

3-676-xx

oxygen

FIXTURE TYPE _____
PROJECT _____

LOCATION _____
DATE _____

W




-15 BK



-40 AGB

LIGHT SOURCE	32W LED Array, 3000K, CRI 90
LUMINAIRE POWER	TBD
RATED LIFE	50000 hr RL
COLOR TEMPERATURES	Field Selectable 3000K/3500K/4000K CCT Note: Oxygen Standard setting is 3000K
LUMEN OUTPUT	TBD Lm (LM-79)
INPUT VOLTAGE	120-277V
DRIVER OUTPUT	TBD
DIMMING	Trailing Edge 100%-1%
CONSTRUCTION	Steel, Glass
DIFFUSER	Matte White Acrylic Diffuser.
FINISHES	-15 Black , -40 Aged Brass
MOUNTING	Installs to a 4" octagonal junction box
STANDARDS	cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

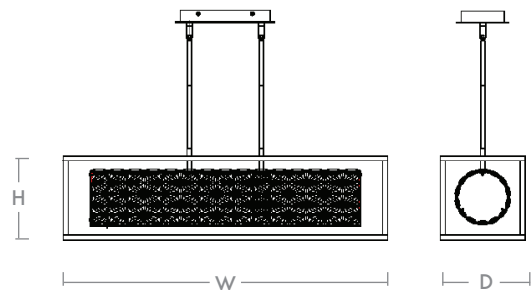

DIMENSIONS

W:	35.5"
D:	9.25"
H:	9.25"
OAH:	Adjustable using 8", 12", 16" Rods (Included)

Order example for standard fixture:
3-676-XX (x-xxx: LED Sequence # / -xx: Finish)

