


GRAND LEDGE 30" LED BOLLARD 120-277V
6662-5CS

WAC
LANDSCAPE LIGHTING

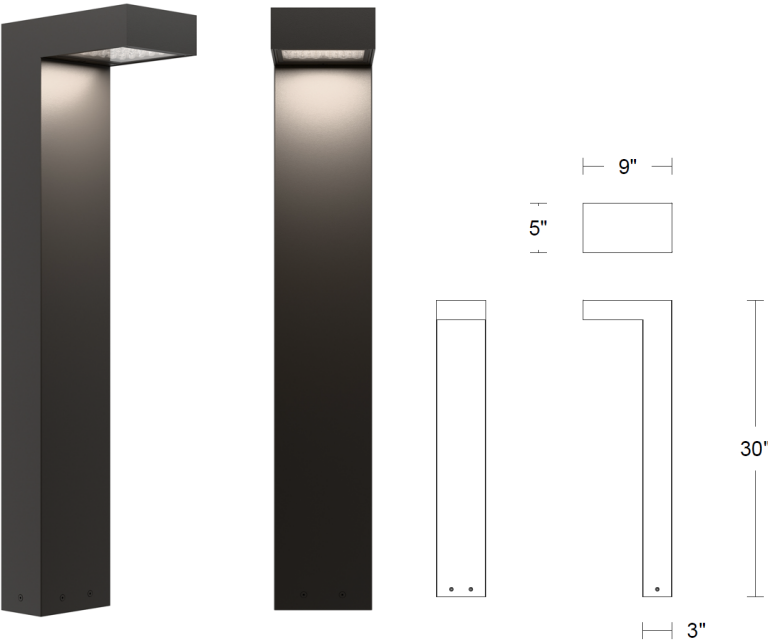

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

A modern architectural bollard light offering Type II distribution for balanced, functional illumination within sophisticated outdoor spaces. The 5 CCT selectable design ensures adaptable ambiance across residential, hospitality, and commercial environments.

FEATURES

- IP66 rated, Protected against powerful water jets
- Factory sealed water tight fixtures
- Corrosion resistant aluminum alloy
- Includes Mounting stake, wire nuts, 6' lead wire
- UL & cUL Listed
- 5 CCTs Selectable: 2700K, 3000K, 3500K, 4000K, 5000K
- Type II lighting distribution

SPECIFICATIONS

Input: 120-277VAC
Power: 23W
Brightness: Up to 1780 lm
CRI: 90
Rated Life: 50,000 hours

ORDERING NUMBER

Color Temp		Finish	
6662	30"	5CS 27/30/35/40/50	BZ BK <i>Bronze on Aluminum Black on Aluminum</i>

6662-5CS

Example: 6662-5CSBK

Mounting accessory included

M6660-CON-KIT
120-277V



Alternative Option, order separately

M6000-STAKE
12V




GRAND LEDGE 42" LED BOLLARD 120-277V

6672-5CS

WAC

LANDSCAPE LIGHTING

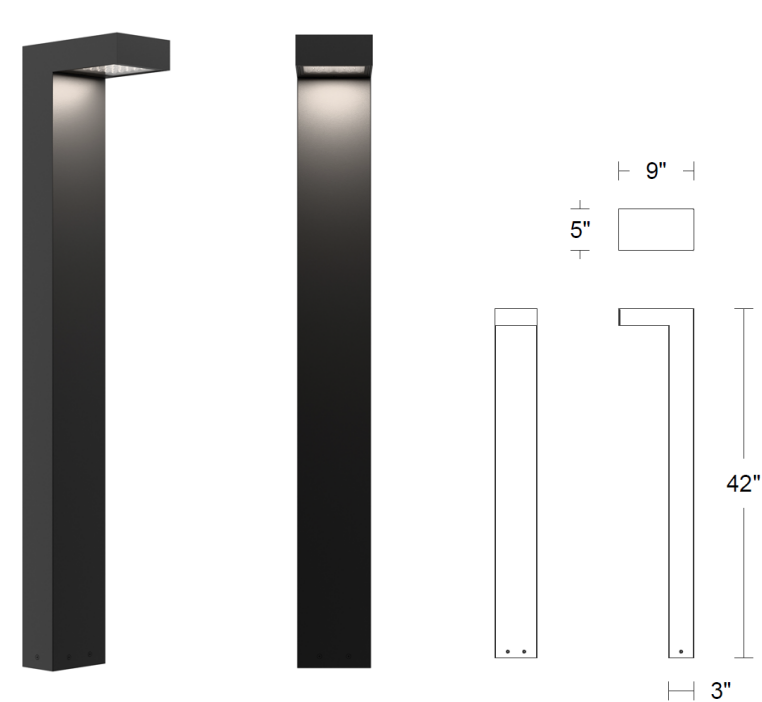

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

A modern architectural bollard light offering Type II distribution for balanced, functional illumination within sophisticated outdoor spaces. The 5 CCT selectable design ensures adaptable ambiance across residential, hospitality, and commercial environments.

FEATURES

- IP66 rated, Protected against powerful water jets
- Factory sealed water tight fixtures
- Corrosion resistant aluminum alloy
- Includes Mounting stake, wire nuts, 6" lead wire
- UL & cUL Listed
- 5 CCTs Selectable: 2700K, 3000K, 3500K, 4000K, 5000K
- Type II lighting distribution

SPECIFICATIONS

Input: 120-277VAC
Power: 23W
Brightness: Up to 1780 lm
CRI: 90
Rated Life: 50,000 hours

ORDERING NUMBER

Color Temp		Finish	
6672	42"	5CS 27/30/35/40/50	BZ BK <i>Bronze on Aluminum Black on Aluminum</i>

6672-5CS_____

Example: 6672-5CSBK

Mounting accessory included

M6660-CON-KIT
120-277V



Alternative Option, order separately

M6000-STAKE
12V

