

Project:

Type:

Prepared By:

Date:



Features and Benefits

Energy-efficient replacement for incandescent and halogen lamps

Durable plastic construction reduces risk of breakage

Rated for use in enclosed and open fixtures in dry or damp locations

Frosted lens delivers smooth, diffuse light

Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs

Technical Specifications			
Performance Product Type: A-Line 80CRI Non Dimmable Description: Replace conventional general purpose bulbs in open or enclosed fixtures in dry or damp environemnts. Wattage Equivalency: 75W Incandescent Input Wattage: 12W Lumens: 1,100lm Efficacy: 92lm/W L70 Lifespan: 15,000-Hour LED lifespan based on IES LM-70 results		Electrical Power Factor: ≥0.7 Dimmable: No Input Voltage: 120V Operating Frequency: 60 Hz Input Current @ 120V (mA): 95mA Operating Temperature: -13°F to 113°F (-25°C to 45°C) LED Characteristics Beam Angle: 230° Color Temperature: 4000K	
		Color Accuracy (CRI): ≥80 CRI R9 Value: High color performance with R9 no greater than 0 Color Consistency: <6-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color	
		Installation Base Type: E26 Edison Construction Finish: White Bulb Shape: A19 Endcap Material: Metal Enclosure Material: Plastic	

Technical Specifications (continued)**Lens Finish:**

Frosted

Compliance

Listings:

UL Listed

Environment:

Suitable for use in dry and damp environments

Fixture Rating:

Suitable for use in enclosed fixtures

T20 Compliant:

Not compliant

California Title 24 JA8 Compliant:

Not Compliant

California Energy Commission (CEC) Status:

Not Lawful for Sales in California

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15B of the FCC Rules

\

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	10	7.6	5
PALLET	1440	26.2	41.6	46.9

Dimension

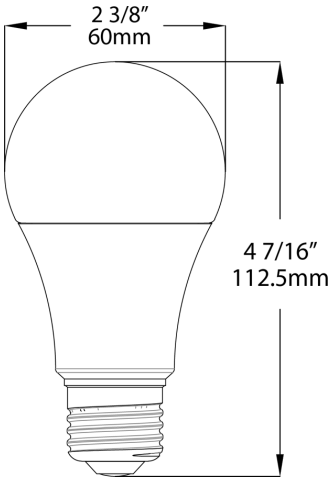

Light Distribution

