

| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

Technical Specifications

Performance

Product Type:
Decorative

Input Wattage:
5W

Wattage Equivalency:
40W Incandescent

Lumens:
450lm

Efficacy:
90lm/W

L70 Lifespan:
15,000 Hours

Construction

Bulb Shape:
A19

Finish:
Frosted

For Use Outdoors in Open Fixtures:
No

LED Characteristics

Color Temperature:
2700K Soft White

Color Accuracy (CRI):
90 CRI

Beam Angle:
360°

Installation

Base Type:
E26 Edison

Electrical

Power Factor:
0.7

Operating Temperature:
-20°C to 45°C (-4°F to 113°F)

Dimmable:
Yes, down to 10%

Input Voltage:
120V

Flicker:
<30%

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Compliance


UL Listed:
Yes

California Energy Commission (CEC) Status:
Lawful for Sales in California


Case and Pallet Dimensions

| | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|------|-------------|------------|-------------|
| CASE | 12 | 10.8 | 8.2 | 5 |
| PALLET | 1080 | 38.4 | 44 | 37.2 |

Dimension

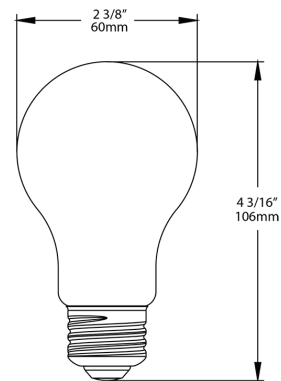

Light Distribution

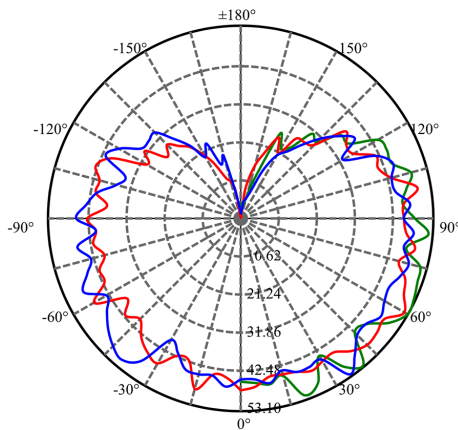

Features

- Replacement for conventional decorative lamps
- Filament LED construction gives a unique traditional look and feel for decorative and ambient applications
- Produces rich and vibrant colors, >90CRI
- Rated for use in enclosed and open fixtures in dry and damp locations
- Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs
- Title 20 Compliant, ENERGY STAR Compliant, UL Listed
- Smooth uniform dimming down to 10% (See Dimmer Compatibility List)

Ordering Matrix

| Family | Wattage | Base Type | CRI/Color Temp | Type | Finish |
|--------|--|-----------|--|--------------|--------------------------|
| A19 | 5 | E26 | 927 | F | F |
| | 5 = 5W 9 = 9W 10 = 10W 13 = 13W | E26 = E26 | 950 = 90 CRI, 5000K 940 = 90 CRI, 4000K 930 = 90 CRI, 3000K 927 = 90 CRI, 2700K | F = Filament | C = Clear F = Frosted |