

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

**Technical Specifications**

**Performance**

**Product Type:**  
Decorative

**Input Wattage:**  
6W

**Wattage Equivalency:**  
60W Incandescent

**Lumens:**  
810lm

**Efficacy:**  
90lm/W

**L70 Lifespan:**  
15,000 Hours

**Construction**

**Bulb Shape:**  
A19

**Finish:**  
Frosted

**For Use Outdoors in Open Fixtures:**  
No

**LED Characteristics**

**Color Temperature:**  
2700K Soft White

**Color Accuracy (CRI):**  
90 CRI

**Beam Angle:**  
360°

**Installation**

**Base Type:**  
E26 Edison

**Electrical**

**Power Factor:**  
0.7

**Operating Temperature:**  
-20°C to 45°C (-4°F to 113°F)

**Dimmable:**  
Yes, down to 10%

**Input Voltage:**  
120V

**Flicker:**  
<30%

**Other**

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Compliance**

**UL Listed:**  
Yes


**California Energy Commission (CEC) Status:**

Lawful for Sales in California


Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	10.8	8.2	5
PALLET	1080	38.4	44	37.2

Dimension

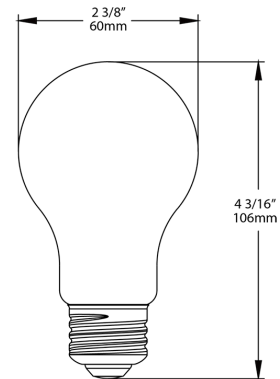

Light Distribution

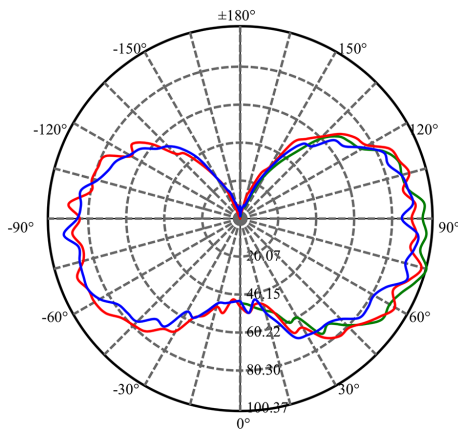

Features

- Replacement for conventional decorative lamps
- Filament LED construction gives a unique traditional look and feel for decorative and ambient applications
- Produces rich and vibrant colors, >90CRI
- Rated for use in enclosed and open fixtures in dry and damp locations
- Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs
- Title 20 Compliant, ENERGY STAR Compliant, UL Listed
- Smooth uniform dimming down to 10% (See Dimmer Compatibility List)

Ordering Matrix

Family	Wattage	Base Type	CRI/Color Temp	Type	Finish
A19	9	E26	927	F	F
	5 = 5W 9 = 9W 10 = 10W 13 = 13W	E26 = E26	950 = 90 CRI, 5000K 940 = 90 CRI, 4000K 930 = 90 CRI, 3000K 927 = 90 CRI, 2700K	F = Filament	C = Clear F = Frosted