



Color: Bronze

Weight: 0.8 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

|             |                  |
|-------------|------------------|
| Type        | Constant Current |
| 120V        | 0.10A            |
| 208V        | N/A              |
| 240V        | N/A              |
| 277V        | N/A              |
| Input Watts | 5.7-12.3W        |

LED Info

|                |                  |
|----------------|------------------|
| Watts          | 12/9/06W         |
| Color Temp     | 3000/4000/5000K  |
| Color Accuracy | 82-85 CRI        |
| L70 Lifespan   | 100,000 Hours    |
| Lumens         | 636-1,324 lm     |
| Efficacy       | 100.2-116.4 lm/W |

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:  
12W/9W/6W (factory default 12W)  
Color temperature selectable 3000K, 4000K and 5000K (factory default 4000K)

Compliance

UL Listed:

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

Ingress protection rating of IP65 for dust and water

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Electrical

Driver:

Constant Current, Class 1, 120V, 50/60Hz, 120V: 0.10A

Dimming Driver:

TRIAC compatible dimmer with dimming as low as 10%.

THD:

14.53% at 120V

Power Factor:

99% at 120V

Surge Protection:

L/N:1KV, L/N-PE:1KV

Aux Power Supply:

No

Dim to Off:

No

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Construction

Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Lens:

Glass

Housing:

Die-cast aluminum

Reflector:

Polyethylene Terephthalate (PET)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish:

Formulated for high durability and long-lasting color

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Optical

NEMA Type:

NEMA Beam Spread 6H x 6V

Installation

Mounting:

Heavy-duty mounting arm with "O" ring seal and stainless steel screws


Technical Specifications (continued)

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Dimensions

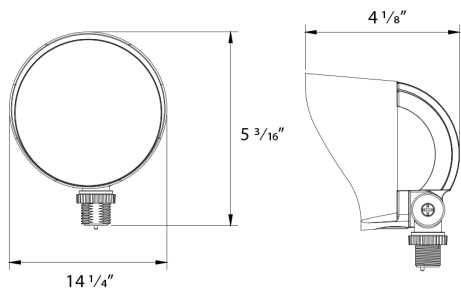

Features

- 100,000-hour LED Life
- 120V
- 5-Year, limited warranty

Ordering Matrix

| Family                                                                 | Wattage | Color Temp                             | Finish                                                   | Driver                      |
|------------------------------------------------------------------------|---------|----------------------------------------|----------------------------------------------------------|-----------------------------|
| BULLET                                                                 | 12      |                                        | A                                                        |                             |
| 12 = 12/9/6W<br>20 = 20/15/10W<br>2X12 = 24/18/12W<br>2X20 = 40/30/20W |         | Blank = 3000/4000/5000K CCT Adjustable | A = Bronze<br>B = Black<br>VG = Verde Green<br>W = White | Blank = 120V, TRIAC Dimming |