



Color: Bronze

Weight: 0.8 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

### Driver Info

Type	Constant Current
120V	0.16A
208V	N/A
240V	N/A
277V	N/A
Input Watts	10.6-19.6W

### LED Info

Watts	20/15/10W
Color Temp	3000/4000/5000K
Color Accuracy	82-85 CRI
L70 Lifespan	100,000 Hours
Lumens	1,147-2,095 lm
Efficacy	98.3-114.3 lm/W

## Technical Specifications

### Field Adjustability

#### Field Adjustable:

Field Adjustable Light Output:  
20W/15W/10W (factory default 20W)  
Color temperature selectable 3000K, 4000K and 5000K (factory default 4000K)

### Compliance

#### UL Listed:

Suitable for wet locations

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### IP Rating:

Ingress protection rating of IP65 for dust and water

#### Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

### Electrical

#### Driver:

Constant Current, Class 1, 120V, 50/60Hz, 120V: 0.16A

#### Dimming Driver:

TRIAC compatible dimmer with dimming as low as 10%.

#### THD:

14.95% at 120V

#### Power Factor:

98.9% at 120V

#### Surge Protection:

L/N:1KV, L/N-PE:1KV

#### Aux Power Supply:

No

#### Dim to Off:

No

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

#### Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

#### Lens:

Glass

#### Housing:

Die-cast aluminum

#### Reflector:

Polyethylene Terephthalate (PET)

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### Finish:

Formulated for high durability and long-lasting color

### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### Optical

#### NEMA Type:

NEMA Beam Spread 6H x 6V

### Installation

#### Mounting:

Heavy-duty mounting arm with "O" ring seal and stainless steel screws


## Technical Specifications (continued)

### Other

#### 5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

### Dimensions

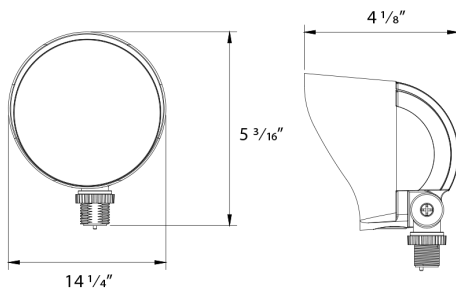

### Features

- 100,000-hour LED Life
- 120V
- 5-Year, limited warranty

### Ordering Matrix

Family	Wattage	Color Temp	Finish	Driver
BULLET	20		A	
	12 = 12/9/6W 20 = 20/15/10W 2X12 = 24/18/12W 2X20 = 40/30/20W	Blank = 3000/4000/5000K CCT Adjustable	A = Bronze B = Black VG = Verde Green W = White	Blank = 120V, TRIAC Dimming