



Color: Verde green

Weight: 0.8 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

| | |
|-------------|------------------|
| Type | Constant Current |
| 120V | 0.16A |
| 208V | N/A |
| 240V | N/A |
| 277V | N/A |
| Input Watts | 10.6-19.6W |

LED Info

| | |
|----------------|-----------------|
| Watts | 20/15/10W |
| Color Temp | 3000/4000/5000K |
| Color Accuracy | 82-85 CRI |
| L70 Lifespan | 100,000 Hours |
| Lumens | 1,147-2,095 lm |
| Efficacy | 98.3-114.3 lm/W |

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
20W/15W/10W (factory default 20W)
Color temperature selectable 3000K, 4000K and 5000K (factory default 4000K)

Compliance

UL Listed:

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

Ingress protection rating of IP65 for dust and water

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Electrical

Driver:

Constant Current, Class 1, 120V, 50/60Hz, 120V: 0.16A

Dimming Driver:

TRIAC compatible dimmer with dimming as low as 10%.

THD:

14.95% at 120V

Power Factor:

98.9% at 120V

Surge Protection:

L/N:1KV, L/N-PE:1KV

Aux Power Supply:

No

Dim to Off:

No

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Construction

Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Lens:

Glass

Housing:

Die-cast aluminum

Reflector:

Polyethylene Terephthalate (PET)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish:

Formulated for high durability and long-lasting color

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Optical

NEMA Type:

NEMA Beam Spread 6H x 6V

Installation

Mounting:

Heavy-duty mounting arm with "O" ring seal and stainless steel screws


Technical Specifications (continued)

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

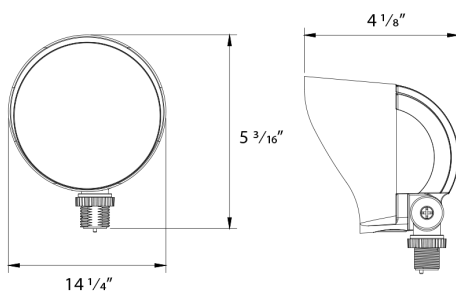

Features

- 100,000-hour LED Life
- 120V
- 5-Year, limited warranty

Ordering Matrix

| Family | Wattage | Color Temp | Finish | Driver |
|--------|--|--|--|-----------------------------|
| BULLET | 20 | | VG | |
| | 12 = 12/9/6W 20 = 20/15/10W 2X12 = 24/18/12W 2X20 = 40/30/20W | Blank = 3000/4000/5000K CCT Adjustable | A = Bronze B = Black VG = Verde Green W = White | Blank = 120V, TRIAC Dimming |