

# SPECIFICATION SHEET

## PRODUCT # : CL-248-SS

• Step Lights

• 316 Marine Grade Stainless Steel Faceplate

### Fixture Specifications:

**Housing:** Injected molded composite for high UV stability.  
**Faceplate:** 316 marine grade stainless steel, fitted to housing with silicone "O" ring gasket.  
**Finish :** SS- Stainless Steel, faceplate  
**Lens:** Frosted and heat resistant flat glass.  
**Socket:** Top grade adjustable ceramic bi-pin socket with retention clip and teflon-jacketed wire lead.  
**Lamp:** 12V, MR-16, 50W max.  
 Available in LED (3.5W & 5W) or without lamp.  
 See the Lamp Guide below for more information.  
**Gasket:** Silicone "O" ring seals faceplate to housing providing weather tight protection.

**Wiring:** Fixture is prewired with a 3ft 18-2 SJT-W direct burial cord. Wire connector sold separately. Silicone filled wire nut (CX-854) or quick-locking wire connector (CX-LOC) are available from Corona Lighting.

**Mounting:** In-ground direct burial or concrete encasement. For best results when mounting in concrete, use the concrete pour kit (CX-237)

**Electrical Notes:** A remote 12V transformer required, may be ordered to Corona Lighting separately. Voltage range for 12V LED lamps are 9V-17V. Some assembly needed.

**Warranty:** Limited lifetime warranty on fixture Stainless Steel faceplate and ten (10) years on housing against manufacturer's defects.



### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

| LAMP NUMBER       | WATTS | BEAM           |       | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|-------------------|-------|----------------|-------|---------------|-------------|--------------------|
|                   |       | SPREAD         | LUMEN |               |             |                    |
| L-ED16-3W-SP      | 3.5   | 15° Spot       | 270   | 2700K         | 50,000      | 25 Watt            |
| L-ED16-3W-FL      | 3.5   | 45° Flood      | 270   | 2700K         | 50,000      | 25 Watt            |
| L-ED16-3W-WF      | 3.5   | 60° Wide Flood | 270   | 2700K         | 50,000      | 25 Watt            |
| L-ED16-5W-SP      | 5     | 15° Spot       | 350   | 2700K         | 50,000      | 40 Watt            |
| L-ED16-5W-FL      | 5     | 45° Flood      | 350   | 2700K         | 50,000      | 40 Watt            |
| L-ED16-5W-WF      | 5     | 60° Wide Flood | 350   | 2700K         | 50,000      | 40 Watt            |
| L-ED16-COB5W-SP   | 5     | 15° Spot       | 450   | 2700K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-FL   | 5     | 38° Flood      | 450   | 2700K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-WF   | 5     | 60° Wide Flood | 450   | 2700K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-SP3K | 5     | 15° Spot       | 470   | 3000K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-FL3K | 5     | 38° Flood      | 470   | 3000K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-WF3K | 5     | 60° Wide Flood | 470   | 3000K         | 50,000      | 50 Watt            |

■ Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_  
 JOB NAME & ADDRESS: \_\_\_\_\_  
 PRODUCT #: \_\_\_\_\_  
 TOTAL QUANTITY: \_\_\_\_\_  
 LAMP TYPE & WATTAGE: \_\_\_\_\_  
 TRANSFORMER: \_\_\_\_\_  
 CONTRACTOR: \_\_\_\_\_  
 SPECIFIER: \_\_\_\_\_

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - lamp - wattage - lamp angle  
 CL - 248-SS - L-ED16 - 5W - FL

Example: CL-248-SS-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.


## PRODUCT # : CL-248-SS

•Step Lights

•316 Marine Grade Stainless Steel Faceplate


### Cable Connectors

- CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**
- CX-858 Speedy Cable Connector, Supply Cable up to 10-2, **Black**
- CX-839 Universal cable connector, Supply cable up to 8-2, one/Pack **Black**
- CX-LOC Quick-Locking Silicone Filled Wire Connector, 25 Sets (50 per Pack)

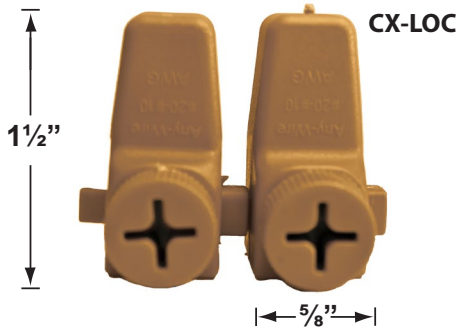

### Mounting Tools

- CX-237 Concrete Pour Kit, **Stainless Steel**

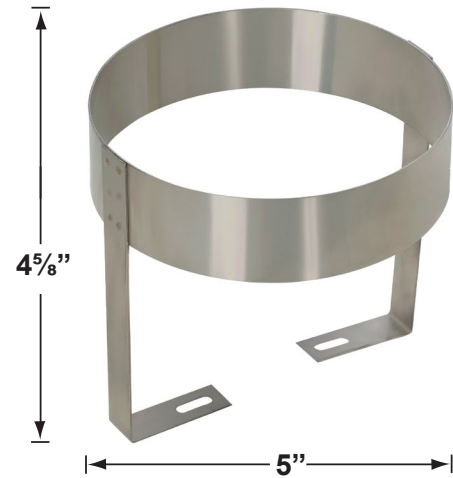

### Special Lenses & Honeycomb Louvers

- CX-238 MR-16 Snap-on holder, **Silver Plated**
- CX-239 MR-16 honeycomb louver, **Black**
- CX-240-AM MR-16 color lens, **Amber**
- CX-240-BL MR-16 color lens, **Blue**
- CX-240-GR MR-16 color lens, **Green**
- CX-240-RD MR-16 color lens, **Red**
- CX-240-YL MR-16 color lens, **Yellow**
- CX-241 MR-16 lens, **Linear Spread**
- CX-242 MR-16 lens, **Frosted**
- CX-243 MR-16 lens, **Prismatic**

*For MR-16 Lenses and Louvers, you will need the CX-238*

