



WWW.CORONALIGHTING.COM

1633 Staunton Ave
Los Angeles, CA 90021
TEL. (800) 727-9262 (800) 727-9957
FAX. (213) 747-4500 (213) 747-3234

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

PRODUCT # : CL-735B-AB

•Path Lights

•Cast Brass


Fixture Specifications:

Housing & Shroud: Corrosion Resistant Cast Brass.
Stem: 24" solid brass pipe with 1/2 in NPT on bottom. 18" stem also available.
Finish: **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process. Also available in **GM**, and **SI**.
Lens: Clear and heat resistant convex glass.
Socket: Top grade fixed ceramic bi-pin socket, with retention clip to securely hold lamp in place.
Lamp: 12V, MR-16, 50W max. Available in LED (3.5W & 5W) or without lamp. See the Lamp Guide below for more information.
Gasket: Silicone double gasketed for water tight sealing

Knuckle: Adjustable cast brass knuckle with thumb screw.
Wiring: Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector available separately. Universal connector (**CX-839**) or silicone filled wire nut (**CX-854**) may be ordered to Corona Lighting.
Mounting Spike: Standard injection molded spike with 1/2" NPT threaded female hub.
Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 9V-17V. Some assembly needed. Proper grease/lubricant is suggested on threaded parts during process.
Warranty: Limited lifetime warranty on fixture housing and stem against manufacturer's defects.



3.5W and 5W

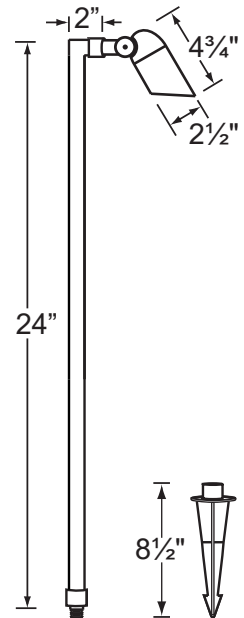

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

| LAMP NUMBER | WATTS | BEAM | | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|-------------------|-------|----------------|-------|---------------|-------------|--------------------|
| | | SPREAD | LUMEN | | | |
| L-ED16-3W-SP | 3.5 | 15° Spot | 270 | 2700K | 50,000 | 25 Watt |
| L-ED16-3W-FL | 3.5 | 45° Flood | 270 | 2700K | 50,000 | 25 Watt |
| L-ED16-3W-WF | 3.5 | 60° Wide Flood | 270 | 2700K | 50,000 | 25 Watt |
| L-ED16-5W-SP | 5 | 15° Spot | 350 | 2700K | 50,000 | 40 Watt |
| L-ED16-5W-FL | 5 | 45° Flood | 350 | 2700K | 50,000 | 40 Watt |
| L-ED16-5W-WF | 5 | 60° Wide Flood | 350 | 2700K | 50,000 | 40 Watt |
| L-ED16-COB5W-SP | 5 | 15° Spot | 450 | 2700K | 50,000 | 50 Watt |
| L-ED16-COB5W-FL | 5 | 38° Flood | 450 | 2700K | 50,000 | 50 Watt |
| L-ED16-COB5W-WF | 5 | 60° Wide Flood | 450 | 2700K | 50,000 | 50 Watt |
| L-ED16-COB5W-SP3K | 5 | 15° Spot | 470 | 3000K | 50,000 | 50 Watt |
| L-ED16-COB5W-FL3K | 5 | 38° Flood | 470 | 3000K | 50,000 | 50 Watt |
| L-ED16-COB5W-WF3K | 5 | 60° Wide Flood | 470 | 3000K | 50,000 | 50 Watt |

▪ Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

• When ordering LED lamp with a fixture your part number should follow the format below:

• **CL** - **product #** - **Length** - **lamp** - **wattage** - **lamp angle**
CL - 735B-AB - [xx] - L-ED16 - 5W - FL

Example: CL-735B-AB-18-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:


PRODUCT # : CL-735B-AB

•Path Lights

•Cast Brass

Mounting Pedestals

- CX-601-BK 1" PVC Mounting Pedestal, ½" NPT, **Black**
- CX-601-VG 1" PVC Mounting Pedestal, ½" NPT, **Verde Green**
- CX-602-BK 2" PVC Mounting Pedestal, ½" NPT, **Black**
- CX-602-VG 2" PVC Mounting Pedestal, ½" NPT, **Verde Green**
- CX-603-BK 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub on top, **Black**
- CX-603-VG 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub on top, **Verde Green**

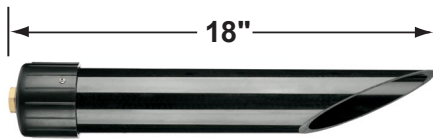

CX-603-BK


- CX-604-BK 1" PVC Adjustable Mounting Pedestal, ½" NPT, **Black**
- CX-621-BK 1" PVC Cap, ½" NPT, **Black**
- CX-621-VG 1" PVC Cap, ½" NPT, **Verde Green**
- CX-622-BK 2" PVC Cap, ½" NPT, **Black**
- CX-622-VG 2" PVC Cap, ½" NPT, **Verde Green**
- CX-624-BK 3" PVC Cap, ½" NPT Female Brass Hub, **Black**
- CX-624-VG 3" PVC Cap, ½" NPT Female Brass Hub, **Verde Green**

Mounting Canopies

- CX-705B-AB Brass Flat Canopy, ½" NPT, **Antique Bronze**
- CX-709B-AB Brass Raised Canopy, ½" NPT, **Antique Bronze**
- CX-718B-AB 5" Brass Canopy, 3-Hole ½" NPT, **Antique Bronze**



CX-709B-AB



CX-718B-AB

Ground Spikes

- CX-642-BK 8.5" ABS Spike, ½" NPT, **Black**
- CX-642-BZ 8.5" ABS Spike, ½" NPT, **Bronze**
- CX-643-BZ 8.5" ABS Spike, ½" NPT, **Bronze**



CX-647-BK

- CX-646-BK 8" ABS Spike, ½" NPT, **Black**
- CX-646-BR 8" ABS Spike, ½" NPT, **Natural Brass**
- CX-646-SS 8" ABS Spike, ½" NPT, **Stainless Steel**
- CX-647-BK 10.5" Heavy Duty ABS Spike, ½" NPT, **Black**

Mounting Risers

- CX-682B-AB 6" Brass Riser, ½" NPT Male/Female, **Antique Bronze**
- CX-683B-AB 12" Brass Riser, ½" NPT Male/Female, **Antique Bronze**
- CX-684B-AB 18" Brass Riser, ½" NPT Male/Female, **Antique Bronze**
- CX-685B-AB 24" Brass Riser, ½" NPT Male/Female, **Antique Bronze**



CX-682B-AB 6"




CX-683B-AB 12"



CX-684B-AB 18"




CX-685B-AB 24"

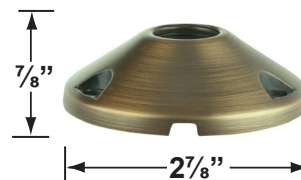

CX-705B-AB

Cable Connectors

- CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**
- CX-858 Speedy Cable Connector, Supply Cable up to 10-2, **Black**
- CX-839 Universal cable connector, Supply cable up to 8-2, one/Pack **Black**
- CX-LOC Quick-Locking Silicone Filled Wire Connector, 25 Sets (50 per Pack)

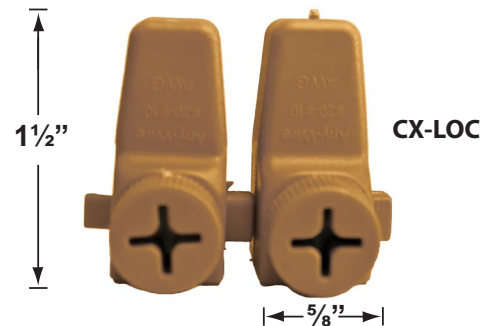

CX-LOC

PRODUCT # : CL-735B-AB

• Path Lights

• [Material]

Special Lenses & Honeycomb Louvers

- CX-238 MR-16 Snap-on holder, **Silver Plated**
- CX-239 MR-16 honeycomb louver, **Black**
- CX-240-AM MR-16 color lens, **Amber**
- CX-240-BL MR-16 color lens, **Blue**
- CX-240-GR MR-16 color lens, **Green**
- CX-240-RD MR-16 color lens, **Red**
- CX-240-YL MR-16 color lens, **Yellow**
- CX-241 MR-16 lens, **Linear Spread**
- CX-242 MR-16 lens, **Frosted**
- CX-243 MR-16 lens, **Prismatic**

• For MR-16 Lenses and Louvers, you will need the CX-238

