

SPECIFICATION SHEET

PRODUCT # : CL-752B-T-GM

•Path Lights

•Cast Brass


Fixture Specifications:

- Housing & Shroud:** Corrosion Resistant Cast Brass.
- Stem:** 24 inch solid brass pipe with 1/2" NPT on bottom. 18 Inch and 12 inch stems are also available.
- Finish:** **GM- Gun Metal.** Natural toning process. GM finish will vary due to artistic process. Also available in **AB**, and **SI**
- Socket:** Clear and heat resistant convex glass.
- Lens:** Top grade fixed ceramic bi-pin socket, with lamp retension clip to securely hold lamp in place.
- Lamps:** Two 12V, MR-16, 50W max. Available in 2xLED (3.5W & 5W) or without lamp. See the Lamp Guide below for more information.
- Gasket:** Silicone double gasketed for water tight sealing.
- Knuckle:** Adjustable cast brass knuckle with thumb screw

- Wiring:** Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector available separately. Universal connector (**CX-839**) silicone filled wire nut (**CX-854**) or quick locking wire connector (**CX-LOC**) are available from Corona Lighting.
- Mounting Spike:** Standard injection molded spike with 1/2" NPT threaded female hub.
- Electrical Notes:** A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 9V-17V. Some assembly needed. Proper grease/lubricant is suggested on threaded parts during installation.
- Warranty:** Limited lifetime warranty on fixture housing and stem against manufacturer's defects.



2x 3.5W & 5W

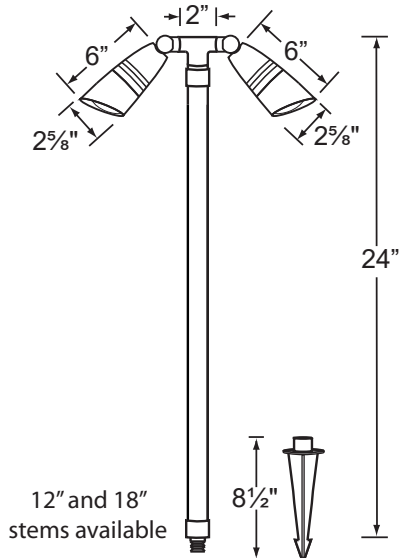

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-ED16-3W-SP	3.5	15° Spot	270	2700K	50,000	25 Watt
L-ED16-3W-FL	3.5	45° Flood	270	2700K	50,000	25 Watt
L-ED16-3W-WF	3.5	60° Wide Flood	270	2700K	50,000	25 Watt
L-ED16-5W-SP	5	15° Spot	350	2700K	50,000	40 Watt
L-ED16-5W-FL	5	45° Flood	350	2700K	50,000	40 Watt
L-ED16-5W-WF	5	60° Wide Flood	350	2700K	50,000	40 Watt
L-ED16-COB5W-SP	5	15° Spot	450	2700K	50,000	50 Watt
L-ED16-COB5W-FL	5	38° Flood	450	2700K	50,000	50 Watt
L-ED16-COB5W-WF	5	60° Wide Flood	450	2700K	50,000	50 Watt
L-ED16-COB5W-SP3K	5	15° Spot	470	3000K	50,000	50 Watt
L-ED16-COB5W-FL3K	5	38° Flood	470	3000K	50,000	50 Watt
L-ED16-COB5W-WF3K	5	60° Wide Flood	470	3000K	50,000	50 Watt

▪ Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

• When ordering LED lamp with a fixture your part number should follow the format below:

• **CL** - **product #** - **Length** - **lamp** - **wattage** - **lamp angle**
CL - 752B-T-GM - 12 - L-ED16 - 5W - FL

Example: CL-752B-T-GM-12-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

JOB INFORMATION

- TYPE: _____ DATE: _____
- JOB NAME & ADDRESS: _____
- PRODUCT #: _____
- TOTAL QUANTITY: _____
- LAMP TYPE & WATTAGE: _____
- TRANSFORMER: _____
- CONTRACTOR: _____
- SPECIFIER: _____


PRODUCT # : CL-752B-T-GM

•Path Lights

• Cast Brass

Mounting Pedestals

- CX-601-BK 1" PVC Mounting Pedestal, 1/2" NPT, **Black**
- CX-601-VG 1" PVC Mounting Pedestal, 1/2" NPT, **Verde Green**
- CX-602-BK 2" PVC Mounting Pedestal, 1/2" NPT, **Black**
- CX-602-VG 2" PVC Mounting Pedestal, 1/2" NPT, **Verde Green**
- CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**
- CX-603-VG 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Verde Green**

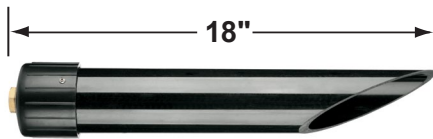

CX-603-BK


- CX-604-BK 1" PVC Adjustable Mounting Pedestal, 1/2" NPT, **Black**
- CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**
- CX-621-VG 1" PVC Cap, 1/2" NPT, **Verde Green**
- CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**
- CX-622-VG 2" PVC Cap, 1/2" NPT, **Verde Green**
- CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**
- CX-624-VG 3" PVC Cap, 1/2" NPT Female Brass Hub, **Verde Green**

Mounting Canopies

- CX-705B-GM Brass Flat Canopy, 1/2" NPT, **Gun Metal**
- CX-709B-GM Brass Raised Canopy, 1/2" NPT, **Gun Metal**
- CX-718B-GM 5" Brass Canopy, 3-Hole 1/2" NPT, **Gun Metal**



CX-709B-GM



CX-718B-GM

Ground Spikes

- CX-642-BK 8.5" ABS Spike, 1/2" NPT, **Black**
- CX-642-BZ 8.5" ABS Spike, 1/2" NPT, **Bronze**
- CX-643-BZ 8.5" ABS Spike, 1/2" NPT, **Bronze**



CX-647-BK

- CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**
- CX-646-BR 8" ABS Spike, 1/2" NPT, **Natural Brass**
- CX-646-SS 8" ABS Spike, 1/2" NPT, **Stainless Steel**
- CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**

Mounting Risers

- CX-682B-GM 6" Brass Riser, 1/2" NPT Male/Female, **Gun Metal**
- CX-683B-GM 12" Brass Riser, 1/2" NPT Male/Female, **Gun Metal**
- CX-684B-GM 18" Brass Riser, 1/2" NPT Male/Female, **Gun Metal**
- CX-685B-GM 24" Brass Riser, 1/2" NPT Male/Female, **Gun Metal**



CX-682B-GM 6"



CX-683B-GM 12"



CX-684B-GM 18"




CX-685B-GM 24"



CX-705B-GM

Cable Connectors

- CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**
- CX-858 Speedy Cable Connector, Supply Cable up to 10-2, **Black**
- CX-839 Universal cable connector, Supply cable up to 8-2, one/Pack **Black**
- CX-LOC Quick-Locking Silicone Filled Wire Connector, 25 Sets (50 per Pack)

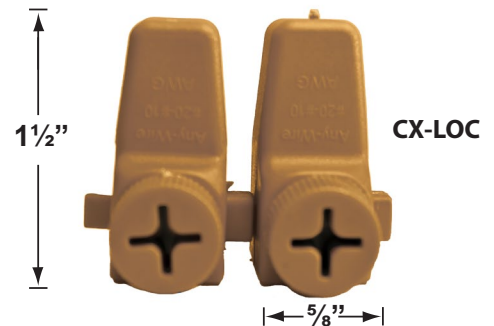

CX-LOC

PRODUCT # : CL-752B-T-GM

• Path Lights

• Cast Brass

Special Lenses & Honeycomb Louvers

CX-238	MR-16 Snap-on holder, Silver Plated
CX-239	MR-16 honeycomb louver, Black
CX-240-AM	MR-16 color lens, Amber
CX-240-BL	MR-16 color lens, Blue
CX-240-GR	MR-16 color lens, Green
CX-240-RD	MR-16 color lens, Red
CX-240-YL	MR-16 color lens, Yellow
CX-241	MR-16 lens, Linear Spread
CX-242	MR-16 lens, Frosted
CX-243	MR-16 lens, Prismatic

• For MR-16 Lenses and Louvers, you will need the CX-238

