

Project Name:	Type:
Part Number:	Date:

6" SLIMDISK CCT SELECTABLE SURFACE MOUNT

SPECIFICATION FEATURES

- Mechanical** - Stamped sheet metal heat sink. Smooth diffuse polycarbonate lens. Mounts to industry standard 4" junction boxes and 5" and 6" recessed housings with accessory (sold separately)
- Electrical** - Utilizing driver on board technology, the 120V, 60Hz driver dims to 5% using most forward or reverse phase dimmers. Go to www.greencreative.com for complete dimmer compatibility list.
- Optical** - Using SelectKelvin technology, field select color temperature between 2700K/3000K/3500K/4000K/5000K with a minimum of 90 CRI. Minimum 100° beam angle.
- Thermal** - Die cast heat design maximizes thermal dissipation. Rated Lifetime (L70): 50,000 hours. Fixture operating temperature: -4°F to 104°F (-20°C to 40°C)
- Compliance and Warranty** - ETL Listed for WET locations. Air-tight rated. IC Rated. Complies with FCC 47CFR Part 15B consumer limits for EMI/RFI emissions. Compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5). 5 year parts warranty for complete fixture.



081624



BENEFITS

- Flexible Installation** - Mount to 4" j-box and 5" and 6" recessed housings
- Shallow Design** - Fixture depth is just 1" below the ceiling
- Better Color** - R9 of 90 and R13 of 90 produce richer reds and more natural skin tones
- Environmental** - Installs almost everywhere with Wet location, IC and Air-tight ratings

APPLICATIONS

- Residential new construction projects
- Hospitality remodel projects
- Commercial retrofit projects
- Closets, laundry rooms, pantries, bathrooms, hallways


ORDERING INFORMATION

ORDERING EXAMPLE : SDSK6/9CCTS/DIM120V

SDSK(size)		(CRI+CCT)		Diver
Series	Size	CRI	CCT	Dimming
<input type="checkbox"/> SDSK Slim Disk	<input type="checkbox"/> 6 6"	<input type="checkbox"/> 9 CRI 90+	<input type="checkbox"/> CCTS Selectable CCT 2700 / 3000 / 3500 / 4000 / 5000K	<input type="checkbox"/> DIM120V 120V Forward/Reverse Phase dimming

Factory setting at highest lumen output and 4000K CCT

DIMENSION & WEIGHT

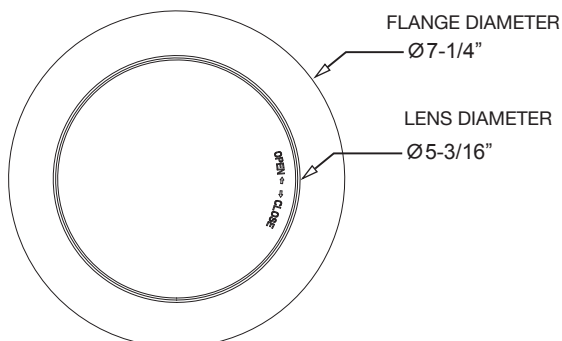



6" SLIMDISK CCT SELECTABLE SURFACE MOUNT

TECHNICAL INFORMATION


Product	Model	Dimming	Input Voltage	Input Frequency	Input Current	Input Power	Power Factor
38312	SDSK6/9CCTS/DIM120V	120V, Forward or Reverse Phase	120V	60Hz	112mA	12W	>0.9

NOMINAL PERFORMANCE

SDSK6/9CCTS/DIM120V					
CCT	2700K	3000K	3500K	4000K	5000K
Lumens (m)	900	920	1,000	1,000	1,000
Efficacy (LPW)	75	77	83	83	83

PHOTOMETRY

SDSK6/9CCTS/DIM120V (at 3500K)



Lumens: 969 lm
CBCP: 325 cd
Power: 11 W
Efficacy: 85 lm/W
CRI: 94.3
Spacing Criteria: 1.3
Beam Angle: 114°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	319	8	7	25	0-30	253	26
20	302	10	5	31	0-40	414	43
30	276	12	3	37	0-60	738	76
40	240	15	2	46	0-90	959	99
50	197	20	1	62			
60	148						
70	95						
80	45						
90	9						

ACCESSORY ORDERING INFORMATION

Product	Model	Description	Pictures	Dimensions
38321	SDSK6/ACC	5-6" Can Installation Accessories		
37934	8EMINVERTER	California Title 20 Compliant 8W Emergency LED Inverter (Field Installation)		
37935	21EMINVERTER	California Title 20 Compliant 21W Emergency LED Inverter (Field Installation)		
FHUPS1-UNV-25L-SD	FHUPS1-UNV-25L-SD	25W Emergency Micro Inverter for field installation to use with 0-10V Driver options. 100-277VAC (up to 150W with use of 0-10V dimming). CEC Compliant		



6" SLIMDISK CCT SELECTABLE SURFACE MOUNT

ORDERING INFORMATION

Product Series	Master Carton			Shipping Carton		
	Case QTY	Carton Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
SDSK6/9CCTS/DIM120V	N.A	N.A	N.A	12pcs	15-7/16" x 9-1/4" x 8-3/16"	8.82 lb

CERTIFICATION INFORMATION

Product	Model	ES ID
38312	SDSK6/9CCTS/DIM120V	3553984

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.