



Affordable, high-performance, low-maintenance LED doorway light. Suitable for mounting heights up to 10', and replaces 70W high pressure sodium. 100,000-Hour LED lifespan. 5-year, no-compromise warranty.

Color: Bronze

Weight: 3.1 lbs

Project:

Type:

Prepared By:

Date:

### Driver Info

Type	Constant Current
120V	0.3A
208V	N/A
240V	N/A
277V	N/A
Input Watts	14.7W

### LED Info

Watts	12W
Color Temp	4000K (Neutral)
Color Accuracy	85 CRI
L70 Lifespan	100,000 Hours
Lumens	1,832 lm
Efficacy	124.6

## Technical Specifications

### Compliance

#### UL Listed:

Suitable for wet locations as downlight. Suitable for mounting within 4ft (1.2m) of the ground.

#### IP Rating:

Ingress protection rating of IP66 for dust and water

#### ADA Compliant:

ENTRA™ is ADA Compliant

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

### LED Characteristics

#### LED:

12W multi-chip, long life LED

#### Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

#### Color Consistency:

3-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

50W HPS

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

#### Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

#### Back Housing:

Die-cast aluminum

#### Lens/Housing Cover:

Vandal resistant polycarbonate molded housing cover and lens

#### Reflectors (2):

White aluminum reflector topped with vacuum-metalized polycarbonate LED reflector

#### Gaskets:

High-temperature silicone

#### Finish:

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Optical

#### BUG Rating:

B1 U3 G1

### Installation

#### Mounting:

Heavy die cast aluminum with 1/2" back knockout and mounting template for mounting to 4" box

#### Recommended Mounting Height:

Up to 10 ft

### Other

#### Patents:

The design of the ENTRATM is protected by patents pending in US, Canada, China, Taiwan and Mexico

## Technical Specifications (continued)

### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

### Electrical

#### Driver:

Constant Current, Class 2, 100-277V, 50/60Hz, 4kV Surge Protection, 350mA, 100-240VAC: 0.3 - 0.15 A, 277VAC: 0.15 A, Power Factor: 99%.

#### THD:

1.61% at 120V, 4.31% at 277V


#### Power Factor:

99.9% at 120V, 97.9% at 277V

#### Photocell:

120V Button photocell included. Photocell is only compatible with 120V.

## Dimensions

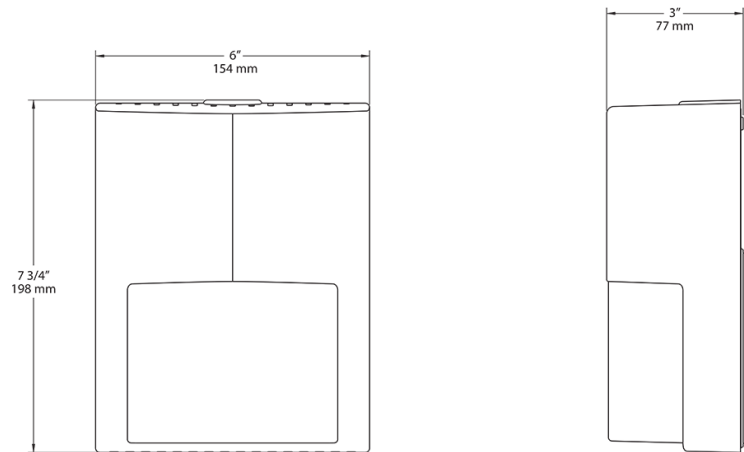

## Features

- Save over \$700 in energy costs over life of fixture
- Equivalent to 70W high pressure sodium
- Durable vandal-resistant polycarbonate housing
- Low-profile and ADA compliant
- 100,000-hour LED lifespan
- 5-Year, No-Compromise Warranty

## Ordering Matrix

Family	Wattage	Color Temp	Finish	Options	Other Options
ENTRA	12	N		/PC	
	12 = 12W	Blank = 5000K Cool N = 4000K Neutral Y = 3000K Warm	Blank = Bronze W = White	Blank = No Options /PC = 120V Button /PC2 = 277V Button /PCS = 120V Swivel /PCS2 = 277V Swivel	Blank = Standard