



Project:	Type:
Prepared By:	Date:

**Technical Specifications**

**Performance**

**Product Type:**

Exit Sign

**Description:**

Exit sign with remote capability and 90-minute emergency battery backup unit.

**Input Power:**

1.2W

**Electrical**

**Power Factor:**

0.4

**Input Voltage:**

120-277V

**Operating Frequency:**

50/60Hz

**Input Current @ 120V (mA):**

20mA

**Input Current @ 277V (mA):**

10mA

**Maximum Output Wattage:**

0.3W

**Dual Voltage Circuit Operation:**

No

**Operating Temperature:**

32°F to 104°F (0°C to 40°C)

**Emergency Illumination:**

90 minutes

**Battery Backup:**

Yes

**Battery Type:**

Nickel Cadmium

**Battery Voltage:**

1.2V

**Recharge Time Required:**

24-hours

**Battery Operating Temperature:**

32°C to 104°C (0°F to 40°F)

**Storage Temperature:**

68°F to 86°F (20°C to 30°C)

**Storage Shelf Life:**

3 years before the initial charge. 5 years after initial charge.

**Self Diagnostics:**

No, manual test only

**Remote Test Switch:**

No

**Installation**

**Mounting Method:**

Back/Top/Side

**Mounting Type:**

Wall/Ceiling Mount

**Cold Weather Rated:**

No

**Construction**

**Shape:**

Rectangle

**Housing Material:**

Thermoplastic

**Housing Color:**

White

**Panel Material:**

Thermoplastic

**Panel Color:**

White

## Technical Specifications (continued)

**Letter Color:**

Red/Green

**Number of Faces:**

Universal Single/Double Face

**Arrow Direction:**

Left/Right Arrow

**Sign Format:**

Stencil

**Remote Capacity:**

Yes

**Remote Head Power (W):**

2W

**Remote Heads Replaceable:**

No

### Compliance

---

**Listings:**

UL924 Listed

**Environment:**

Suitable for use in dry and damp environments

**IP Rating:**

IP20

**T20 Compliant:**

Can be used to conform with the requirements of California Title 20

**California Title 24 JA8 Compliant:**

No

**California Energy Commission (CEC) Status:**

Lawful for Sales in California

**FCC:**

Complies with Part 15 of the FCC Rules


### Other

---

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Dimensions

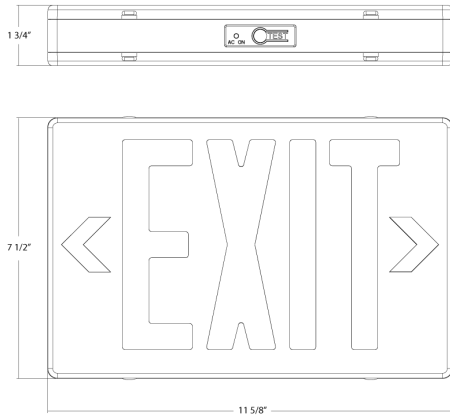

## Features

- Double-face panel with red letters
- Durable thermoplastic design
- 90 minutes of battery backup
- N/A
- Compliant with California Title 20

## Ordering Matrix

Family	Face	Exit Sign Letter Color	Arrows	Housing	State	Battery Backup	Remote Capable
EXIT							R
	<b>1</b> = 1 Face <b>Blank</b> = Universal Faces	<b>Blank</b> = Red <b>G</b> = Green	<b>LRA</b> = Left Right Arrow <b>RA</b> = Right Arrow <b>LA</b> = Left Arrow <b>DA</b> = Double Arrow <b>Blank</b> = No Arrow	<b>Blank</b> = White Housing	<b>Blank</b> = Standard <b>CH</b> = Chicago <b>NY</b> = New York	<b>Blank</b> = No Battery Backup <b>/E</b> = Battery Backup	<b>Blank</b> = No Remote Capable <b>R</b> = Remote Capable