



Color: Mirror

Weight: 3.4 lbs

| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

Technical Specifications

Performance

Product Type:

New York City-Compliant Edge-Lit Exit Sign

Description:

New York City-approved edge-lit exit sign with a single face and red letters. 90 minutes of emergency battery backup.

Input Wattage:

4W @120V and 277V

Electrical

Power Factor:

≥0.9

Input Voltage:

Dual 120/277 Voltage

Operating Frequency (Hz):

60Hz

Input Current @ 120V (mA):

30mA

Input Current @ 277V (mA):

20mA

Dual Voltage Circuit Operation:

No

Operating Temperature:

32°F to 122°F (0°C to 50°C)

Emergency Illumination:

90 minutes

Battery Backup:

Yes

Battery Type:

Nickel Cadmium

Battery Voltage:

4.8V

Recharge Time Required:

24-hours

Battery Operating Temperature:

32°C to 122°C (0°F to 50°F)

Storage Temperature:

68°F to 86°F (20°C to 30°C)

Storage Shelf Life:

3 years before the initial charge. 5 years after initial charge.

Self Diagnostics:

No, manual test only

Remote Test Switch:

No

Installation

Mounting Method:

Back/Top/End

Mounting Type:

Wall/Ceiling Mount

Cold Weather Rated:

No

Construction

Shape:

Rectangle

Housing Material:

Aluminum

Panel Material:

Acrylic

Panel Color:

Mirror

Letter Color:

Red

Housing Color:

Aluminum

Technical Specifications (continued)

Number of Faces:

Single Face

Arrow Direction:

No Arrow

Arrow Material:

Adhesive (included)

Sign Format:

Edge-lit

Remote Capacity:

No

Compliance**Listings:**

UL924 Listed, NFPA 101 (current Life Safety Code),
NEC and OSHA illumination standards

Environment:

Suitable for indoor use in dry and damp
environments

IP Rating:

Indoor

Certification Model Number:

NYELXTEU1RMAEM

T20 Compliant:

Can be used to conform with the requirements of
California Title 20

California Title 24 JA8 Compliant:

Not applicable

California Energy Commission (CEC) Status:

Lawful for Sales in California

City Compliance:

New York City Approved

FCC:


Complies with Part 15 of the FCC Rules

Other**Warranty:**

RAB warrants that our LED products will be free from
defects in materials and workmanship for a period of
five (5) years from the date of delivery to the end
user, including coverage of light output, color
stability, driver performance and fixture finish. RAB's
warranty is subject to all terms and conditions found
at rablighting.com/warranty.

Battery is prorated.

Dimensions

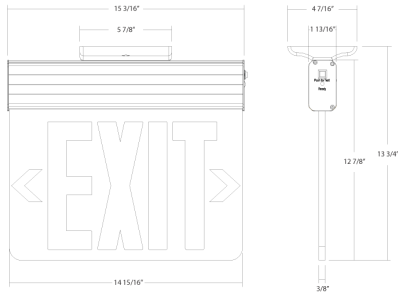

Features

- Single-face panel with red letters
- Modern edge-lit design
- New York City compliant
- N/A

Ordering Matrix

| Family | Mounting | Face | Exit Sign Letter Color | Panel | Housing | Arrows | Self Testing | State | Battery Backup |
|----------|---------------------------------------------------------------------------------|-----------------------------------------------------|----------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|------------------------------------------------------------------------|----------------------------------------------------------------|
| EXITEDGE | | 1 | | MP | | | | NY | /E |
| | RE = Recessed Ceiling Mount Blank = Wall/Ceiling Surface Mount | Blank = Universal Faces 1 = 1 Face | Blank = Red G = Green | Blank = Clear Panel MP = Mirror Panel WP = White Panel | Blank = Aluminum Housing W = White Housing | Blank = No Arrow LRA = Left/Right Arrow RA = Right Arrow LA = Left Arrow DA = Double Arrow | Blank = No Self Testing S = Self Testing | Blank = Standard CH = Chicago NY = New York | Blank = No Battery Backup /E = Battery Backup |