



| | |
|--------------|-------|
| Project: | Type: |
| Prepared By: | Date: |

Technical Specifications

Performance

Product Type:

Outdoor Exit Sign

Description:

Outdoor exit sign with a single face and green letters. Wet and cold weather rated.

Input Wattage:

3.3W

Electrical

Power Factor:

≥0.9

Input Voltage:

Dual 120/277 Voltage

Operating Frequency (Hz):

60Hz

Input Current @ 120V (mA):

30mA

Input Current @ 277V (mA):

14mA

Dual Voltage Circuit Operation:

No

Operating Temperature:

-4°F to 122°F (-20°C to 50°C)

Emergency Illumination:

90 minutes

Battery Backup:

Yes

Battery Type:

Nickel Cadmium

Battery Voltage:

4.8V

Recharge Time Required:

24-hours

Battery Operating Temperature:

-4°C to 122°C (-20°F to 50°F)

Storage Temperature:

68°F to 86°F (20°C to 30°C)

Storage Shelf Life:

3 years before the initial charge. 5 years after initial charge.

Self Diagnostics:

No, manual test only

Remote Test Switch:

No

Installation

Mounting Method:

Back/Top/End

Mounting Type:

Wall/Ceiling Mount

Cold Weather Rated:

Yes

Construction

Shape:

Rectangle

Housing Material:

Thermoplastic

Panel Material:

Thermoplastic

Panel Color:

White

Letter Color:

Green

Housing Color:

White

Technical Specifications (continued)

Number of Faces:

Single Face

Arrow Direction:

No Arrow

Sign Format:

Stencil

Remote Capacity:

No

Compliance

Listings:

UL924 Listed, NFPA 101 (current Life Safety Code),
NEC and OSHA illumination standards

Environment:

Suitable for indoor or outdoor use in dry, damp, and
wet environments

IP Rating:

Outdoor

Certification Model Number:

WLEZXTEU1GWEM-CW

T20 Compliant:

Can be used to conform with the requirements of
California Title 20

California Title 24 JA8 Compliant:

Not applicable

California Energy Commission (CEC) Status:

Lawful for Sales in California

FCC:


Complies with Part 15 of the FCC Rules

Other

Warranty:

RAB warrants that our LED products will be free from
defects in materials and workmanship for a period of
five (5) years from the date of delivery to the end
user, including coverage of light output, color
stability, driver performance and fixture finish. RAB's
warranty is subject to all terms and conditions found
at rablighting.com/warranty.
Battery is prorated.

Dimensions

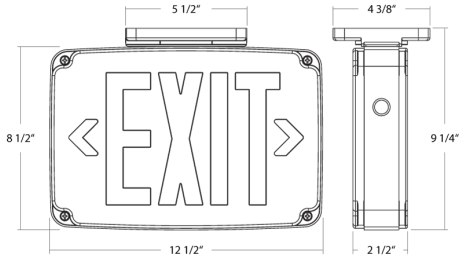

Features

- Single-face panel with color letters
- Durable thermoplastic design
- Rated for use indoor and outdoor in dry, damp, and wet environments.
- Compliant with California Title 20

Ordering Matrix

| Family | Face | Exit Sign Letter Color | Panel | Housing | Cold Weather |
|---------|----------------|--------------------------|---------------------|-----------------------|--|
| EXITOUT | | G | | | C |
| | Blank = 1 Face | Blank = Red G = Green | Blank = White Panel | Blank = White Housing | Blank = Wet Location Rated C = Cold Weather |