

# LEDVANCE Luminaires

## EMERGENCY MINI WALL PACK

PERFORMANCE CLASS

### Application

The EMERGENCY MINI WALL PACK luminaires are environmentally preferable LED alternatives to traditional HID luminaires, offering up to 67% in energy savings. Ideal in place of traditional luminaires, or as new installations, the EMERGENCY MINI WALL PACK is offered with 3 selectable color temperatures and emergency back-up for illuminating building exteriors, outdoor corridors, walkways, and stairwells where egress lighting is required.

### Benefits and Features

- CCT Selectable (3000K, 4000K, or 5000K) enabled through switch located inside fixture
- IP65 rated body with aluminum backplate and polycarbonate lens offers easy mounting, reducing installation and maintenance costs
- High color rendering and DLC Premium listing ensure energy efficiency and provide uniform and even lighting
- Photosensor included provides additional energy savings
- Emergency Battery Back-up for egress lighting
- Up to 130 LPW
- CRI >80
- Offered in 15 watts
- Non-cutoff distribution
- Energy savings up to 67%

### Electrical

- 120-277V<sub>AC</sub>
- Power Factor >0.9
- THD <20%
- 0-10V dimmable

### Rated Life

- 50,000 hours (L<sub>70</sub>)

### Warranty

- 5-year
- NLB Trusted Warranty Program

### Operating Temperature

- -40°F to +122°F (-40°C to +50°C) when not in emergency mode
- +32°F to +122°F (0°C to +50°C) when in emergency mode



### Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
23W CFL	23	15	35%
35W HPS	45	15	67%
42W CFL	46	15	67%

### Certifications and Listings

- cULus
- RoHS
- FCC
- IP65
- DLC Premium

### Installation

Luminaire mounts to recessed outlet box or can be surface mounted.



## Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

### Ordering Guide


<b>EMWALPAK</b>	<b>1A</b>	<b>/ 015</b>	<b>UNV</b>	<b>D</b>	<b>8</b>	<b>SC2</b>	<b>/ NC</b>	<b>/ BZ</b>	<b>/ P</b>
Product Name	Generation	Wattage	Voltage	Dimming	CRI	Color Temp	Distribution	Color/Finish	Options
EMWALPAK = Emergency Mini Wall Pack	1A = Generation 1A	015 = 15 Watts	120-277V	D = 0-10V	8 = >80	SC2 = 3000, 4000 or 5000K	NC = Non cutoff	BZ = Bronze Finish	P = Photocell

### Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Input Voltage (V)	Dimming	CRI	Color Temp.	Distribution	Total Fixture Lumens	LPW	DLC
61369	EMWALPAK1A/015UNVD8SC2NC/BZ/P	15	120-277	0-10V	>80	3000, 4000 or 5000K	Non-cutoff	1950	130	Premium

### Physical Information

Luminaire Description	(A) Length in (mm)	(B) Width in (mm)	(C) Height in (mm)
EMWALPAK1A	8.23 (209)	5.04 (128)	2.75 (70)

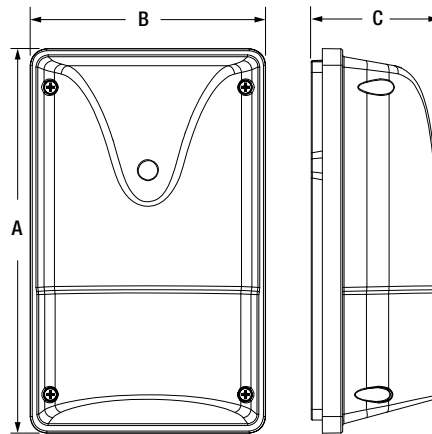

### Options Information

Emergency Battery Back-up: Activates when normal power supply to the fixture fails, providing a minimum of 1875 lumens for at least 90 minutes.

LEDVANCE LLC  
 200 Ballardvale Street  
 Wilmington, MA 01887 USA  
 Phone 1-800-LIGHTBULB (1-800-544-4828)  
 www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.  
 All other trademarks are those of their respective owners.  
 Licensee of product trademark SYLVANIA in general lighting.  
 Specifications subject to change without notice.

[/sylvania](#) [/sylvania](#)

