



Color: White

Weight: 2.1 lbs

Project:

Type:

Prepared By:

Date:

**Driver Info**

Type	Constant Current
120V	0.37A
208V	0.21A
240V	0.18A
277V	0.16A
Input Watts	20.4-39.4W

**LED Info**

Watts	40/35/30/25/20W
Color Temp	3000/3500/4000/5000/6500K
Color Accuracy	83-85 CRI
L70 Lifespan	100,000 Hours
Lumens	2,637-5,081 lm
Efficacy	126.8-131.4 lm/W

**Technical Specifications****Field Adjustability****Field Adjustable:**

Field Adjustable Light Output:  
40/35/30/35/20W (factory default 40W)  
Color temperature selectable by 3000K, 3500K,  
4000K, 5000K and 6500 (factory default 4000K)

**Compliance****UL Listed:**

Suitable for damp locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-7M9K6M

**Electrical****Driver:**

40W:  
Constant Current, Class 2, 120-277V, 50/60 Hz, 120V:  
0.37A, 208V: 0.21A, 240V: 0.18A, 277V: 0.16A  
35W:  
Constant Current, Class 2, 120-277V, 50/60 Hz, 120V:  
0.32A, 208V: 0.19A, 240V: 0.16A, 277V: 0.14A  
30W:  
Constant Current, Class 2, 120-277V, 50/60 Hz, 120V:  
0.28A, 208V: 0.16A, 240V: 0.14A, 277V: 0.12A  
25W:  
Constant Current, Class 2, 120-277V, 50/60 Hz, 120V:  
0.23A, 208V: 0.13A, 240V: 0.12A, 277V: 0.10A  
20W:  
Constant Current, Class 2, 120-277V, 50/60 Hz, 120V:  
0.18A, 208V: 0.11A, 240V: 0.08A, 277V: 0.08A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**THD:**

5.82% at 120V, 12.04% at 277V

**Power Factor:**

99.79% at 120V, 99.80% at 277V

**Aux Power Supply:**

Yes

**Dim to Off:**

Yes

**Construction****Cold Weather Starting:**

The minimum starting temperature is -20°C (-4°F)

**Ambient Temperature:**

Suitable for use in up to 40°C (104°F)

**IC Rated:**

Suitable for direct contact with insulation

**Housing:**

Aluminum

**Lens:**

Polycarbonate lens

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Installation****Mounting:**

Recessed into existing T-grid brackets

**Technical Specifications (continued)**

**LED Characteristics**

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Performance**

**Lifespan:**


100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Other**

**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Dimensions**

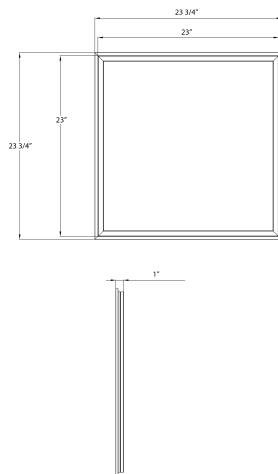

**Features**

- 100,000-hour LED Life
- DLC Premium Listed
- 0-10V dimming standard
- 5-Year, limited warranty

**Ordering Matrix**

Family	Size/Wattage	Color Temp	Finish	Driver	Options
FR	2X2				
	2X2 = 2'x2', 40/35/30/25/20W 1X4 = 1'x4', 40/35/30/25/20W 2X4 = 2'x4, 50/45/40/35/30W	Blank = 3000/3500/4000/5000/6500K CCT Adjustable	Blank = White	Blank = 120-277V, 0-10V Dimming	Blank = No Option /E = Battery Backup /LCB = Lightcloud Blue