



Date:

|                |               |
|----------------|---------------|
| Watts          | 26W           |
| Color Temp     | 3000K (Warm)  |
| Color Accuracy | 72 CRI        |
| L70 Lifespan   | 100,000 Hours |
| Lumens         | 3,078 lm      |
| Efficacy       | 116.2 lm/W    |

Mercury and UV free. RoHS-compliant components.

Technical Specifications (continued)

Installation

Mounting:

Easy hanging plate with hooks for ceiling mount

Other

Patents:

The design of GLED26 is protected by patents pending in US, Canada, China, Taiwan and Mexico

Warranty:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Optical

BUG Rating:

B2 U3 G1

Dimensions

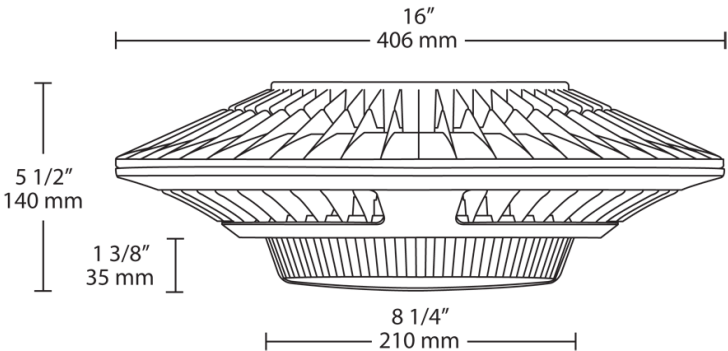

Features

- Low-profile design Ideal for Parking Garages
- 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Up to 25% Reduction in Fixture Count
- Lock screw provided for pendant mount

Ordering Matrix

| Family | Wattage                          | Color Temp                                                | Back Box                            | Finish                      | Driver                                                                                                        |
|--------|----------------------------------|-----------------------------------------------------------|-------------------------------------|-----------------------------|---------------------------------------------------------------------------------------------------------------|
| GLED   | 26                               | Y                                                         |                                     |                             | /D10                                                                                                          |
|        | 52 = 52W<br>78 = 78W<br>26 = 26W | Blank = 5000K Cool<br>N = 4000K Neutral<br>Y = 3000K Warm | Blank = No Backbox<br>BB = Back Box | Blank = Bronze<br>W = White | Blank = No Option<br>/D10 = 0-10V Dimming<br>/480 = 480V<br>/480/D10 = 480V w/0-10V Dimming<br>/BL = Bi-Level |