



# KT-EC-TP2-XX3RGW-SU-RC


## EXIT COMBO

### DESCRIPTION

LED Exit Combo | Single or Double Facing | Dual Heads |  
 Switchable Red and Green Lettering | Remote Capable |  
 White or Black Finish | 6500K White Light | Surface Mount |  
 Battery Backup | Built-in Test Switch | 120-277V Input

### APPLICATION

UL 924 Compliant Remote Capable Exit Combo with Built-in Red or Green Switchable Lettering. Provides 90+ Minutes of Emergency Power.

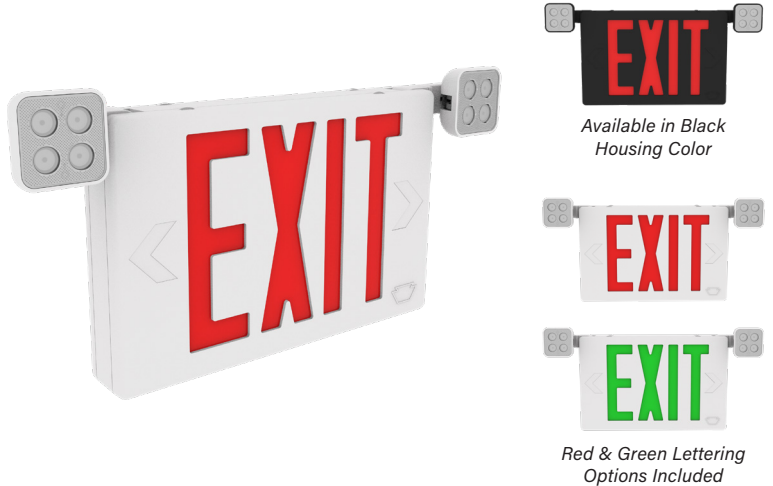

### PRODUCT FEATURES

- Red or Green Switchable LED and Diffuser Color
- Includes Single or Double Facing Configurations
- Surface Mount - Back, Side, or Top
- Integrated Backup Battery - NiMH 2000mAh
- 90 Minutes of Emergency Power
- Integrated Test Switch & Charge Indicator
- Remote Head Capable
- Thermoplastic Housing – UL 94 5VA Flame Rating
- Ambient Operating Temperature: 0°C/32°F to 40°C/104°F
- UL Certified for Damp Locations
- Universal J-Box Mounting Pattern

### PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Input Power	CCT	Lumens	Letter Color	Housing Color	Mounting	Battery Type	Battery Capacity	Recharge Time	Remote Capable
KT-EC-TP2-WH3RGW-SU-RC	120-277V	2.8W	6500K	160	Red & Green	White	Surface: Top, Side, and Back Mount	Nickel-Metal Hydride	2000mAh	24 Hours	Yes
KT-EC-TP2-BL3RGW-SU-RC						Black					

\* See Ordering Information and Catalog Number Breakdown for more details.

### PHYSICAL SPECIFICATIONS

#### Weight

Fixture Weight	Carton Weight
2.5 lbs	171 lbs

## KT-EC-TP2-XX3RGW-SU-RC EXIT COMBO

### FIELD-ADJUSTABLE FEATURES: LED COLOR, DIFFUSER COLOR, CHEVRONS, FACINGS & MOUNTING ORIENTATION


This fixture is equipped with field-adjustable red or green LED color and colored diffusers, removable chevrons, single (front only) or double (front and back) facings, and three mounting options (top, side, or back).

*Note: Ensure power is off to the fixture and rechargeable battery is disconnected before making any adjustments.*

#### Selectable Color


Select the diffuser color of choice. Face plates ship with Red Diffuser already installed. To use Green Diffuser, remove the Red Diffuser and secure the Green Diffuser to Face Plate(s).

Toggle the switchable button to choose red or green illumination.

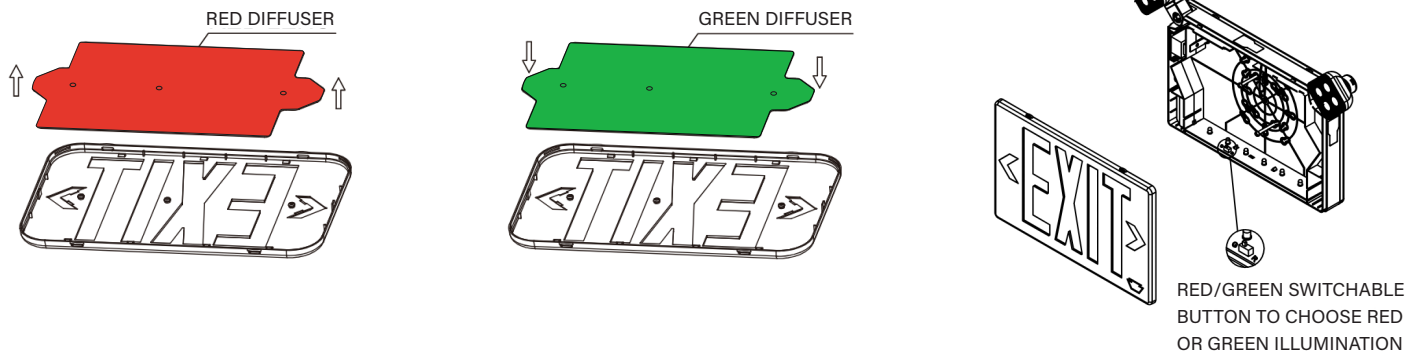

#### Use of Chevrons

Remove punchout chevron(s) on faceplate, as needed. The diffuser would need to be removed to allow chevron removal. Re-secure diffuser after chevron removal.

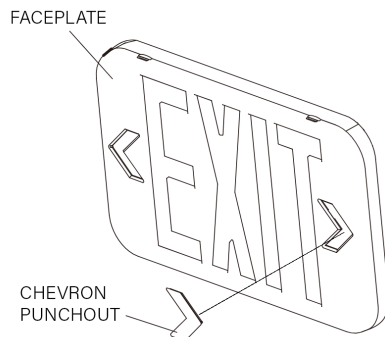

#### Single or Double-Sided Facing

This fixture ships with two "EXIT" sign faceplates and one back/solid faceplate to allow for either single- or double-sided Exit Sign. Single-sided Exit Sign will use one "EXIT" faceplate and the back/solid faceplate, while double-sided Exit Sign will use two "EXIT" faceplates. All three faceplates are included.

# KT-EC-TP2-XX3RGW-SU-RC

## EXIT COMBO

### MOUNTING OPTIONS


#### BACK MOUNT



#### TOP MOUNT




#### SIDE MOUNT

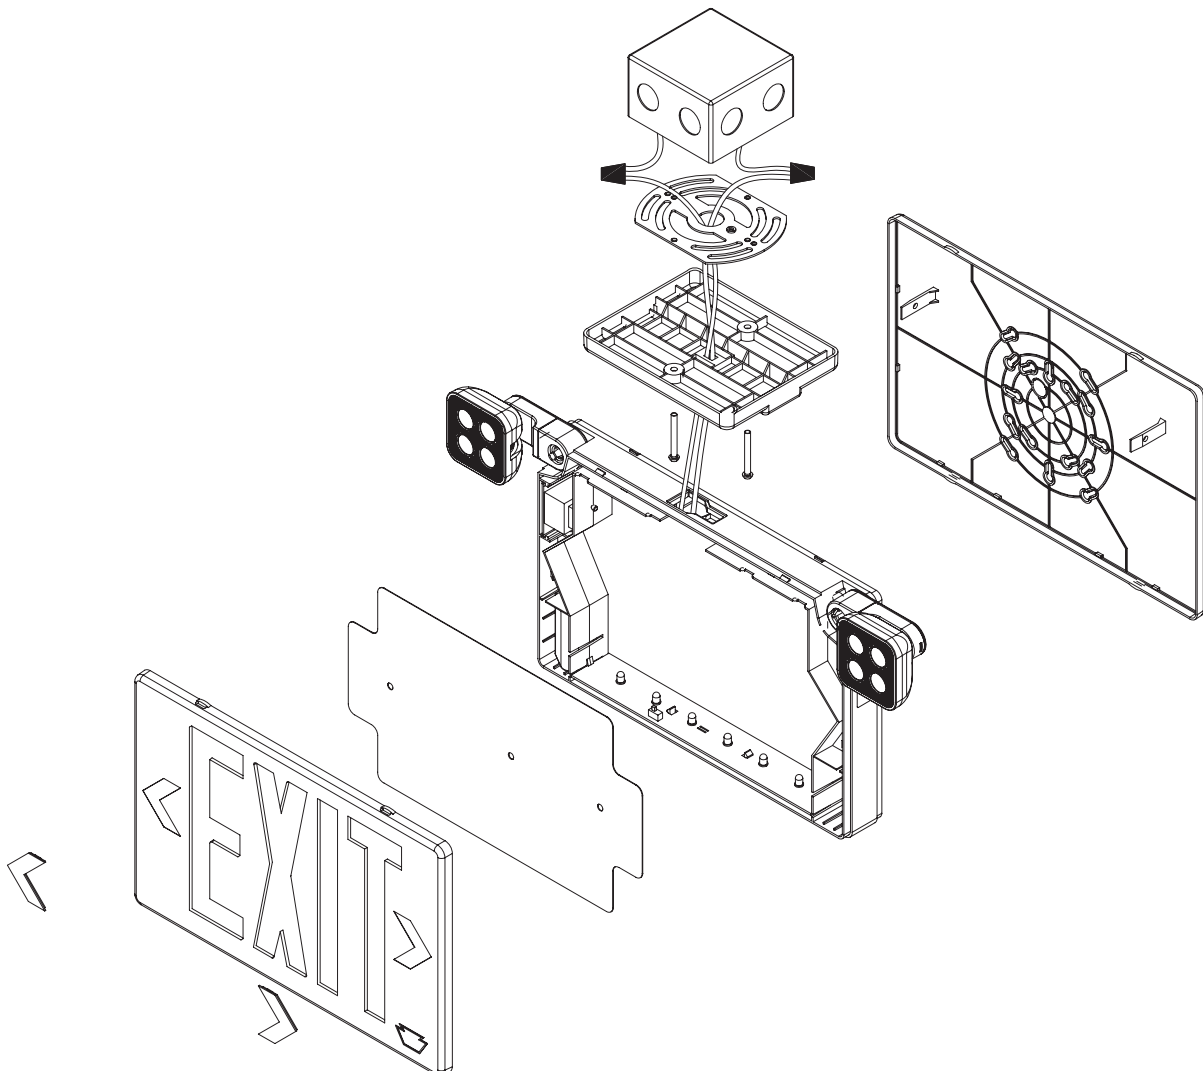

# KT-EC-TP2-XX3RGW-SU-RC

## EXIT COMBO

### SPACING GUIDELINES

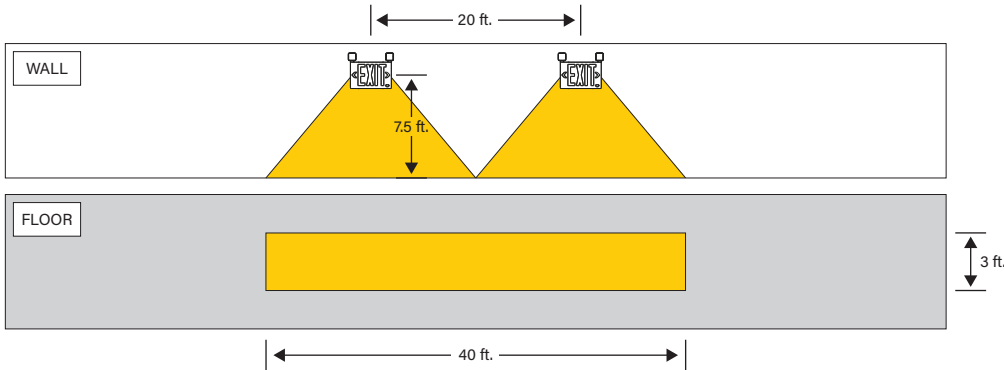

Multiple Unit Spacing	
Room Description	8' x 12' Hallway
Head Orientation	30° Rotation, 40° Tilt
Path of Egress	3' Wide
Illumination	1fc average, 0.1fc minimum

\*Spacing guidelines provided are for general reference only. Actual performance will vary based on each installation's unique dimensions, wall colors, floor type, and other factors. Please contact [lightinglayouts@keystonetech.com](mailto:lightinglayouts@keystonetech.com) for detailed layout assistance needs.

### ORDERING INFORMATION

Catalog Number	Finish	UPC	Easy Code
KT-EC-TP2-WH3RGW-SU-RC	White	843654169217	OLJ-04
KT-EC-TP2-BL3RGW-SU-RC	Black	843654169224	WUE-33

### CATALOG NUMBER BREAKDOWN

# KT-EC-TP2-XX3RGW-SU-RC

1	2	3	4	5	6	7	8	9	10	11
<b>1 Keystone Technologies</b>	<b>2 Exit Combo</b>	<b>3 Thermo Plastic</b>	<b>4 Form Factor 2</b>	<b>5 Housing Color</b>	<b>6 Facings</b>	<b>7 Lettering Color</b>	<b>8 Light Color</b>	<b>9 Mounting</b>	<b>10 Input Voltage</b>	<b>11 Remote Capable</b>
				WH White	3 Single and Double	RG Red and Green Lettering	W White	S Surface Mount	U 120-277V	
				BL Black						