



UPC: 192552007412

Color: White

Weight: 0.3 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	10W
120V	0.09A	Color Temp	2700K-6500K
208V	N/A	Color Accuracy	95 CRI
240V	N/A	L70 Lifespan	25,000 Hours
277V	N/A	Lumens	800 lm
Input Watts	10W	Efficacy	82

Technical Specifications

Performance

Product Type:

Bluetooth-Enabled A19/BR30

Input Wattage:

10W

Lumens:

800lm

Efficacy:

82lm/W

L70 Lifespan:

25,000-Hour LED lifespan based on IES LM-70 results

LED Characteristics

Color Accuracy (CRI):

>90 CRI

Beam Angle:

230°

Color Temperature:

2700K-6500K

Electrical

Power Factor:

>0.9

Dimming:

Dimmable via Lightcloud Blue mobile app

Flicker:

<5%

Operating Temperature:

-20 to 40°C (-4°F to 104°F)

Input Voltage:

120V

Operating Frequency:

60Hz

Construction

Material:

Plastic

Bulb Shape:

A19

Installation

Base Type:

E26, Medium Screw Base

Compliance

Energy Star Approved:

ENERGY STAR® Version 2.0 Certified

Certification Model Number:

2372120

UL Listed:

Suitable for damp locations

Fixture Rating:

Enclosed

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	9.92	7.8	5
PALLET	2	42.05	39.76	20.09

Dimension

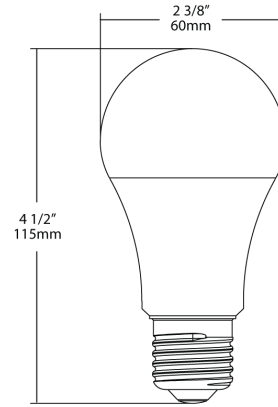

Features

- Direct Connect to the Lightcloud Blue mobile app via Bluetooth, no Gateway or Hub required
- Use mobile device to configure features for On/Off Control, Dim Level, Color Temperature, Schedules, Scenes, SmartShift and more.
- Natural Spectrum Technology mimics natural sunlight to see colors more accurately
- Tunable White 2700-6500K with smooth transition between color temperatures
- Circadian SmartShift Capable to sync with local sunrise/sunset

Ordering Matrix

Family	Wattage	Base Type	CRI/Color Temp	SmartShift	Spectrum	Pack
LCBA19	10	E26	9TW	SS	NS	
	10 = 10W	E26 = E26 Base	9TW = 90 CRI, Tunable White	SS = SmartShift	NS = Natural Spectrum	Blank = Standard 2P-1 = 2pack A19 1 Nano