


# LDSX SERIES OUTDOOR LIGHTING

LDSX-L-18-22W-MCTP-ORB  
FULL-LENS WALL SCONCE, POWER & CCT-ADJUSTABLE  
**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

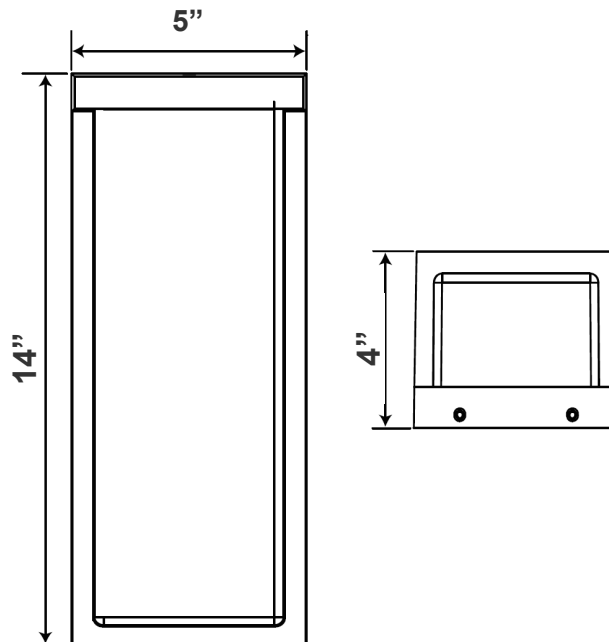

14"(H) x 5"(W) x 4"(D)

This wall light is a perfect combination of modern style, beautiful appearance, and durability. The lamp design is quite novel with an elegant and fashionable look. The backplate of the entire lamp is integrated with die-cast aluminum to ensure good heat dissipation. The lampshade uses a PC anti-yellow and high-transmittance material to provide excellent light transmission. It is available in two different sizes with three adjustable wattage levels and three adjustable color temperature levels. These decorative wall lights are ideal for balconies, porches, walkways, hallways, entryways, and living and dining spaces in both residential and commercial settings.

## Features

- Oil-Rubbed Bronze
- 7-Year Warranty
- Multi CCT & Power (Selectable Switch On The Back )
- Aluminum Housing and Steel Back Plate
- Rated life: 70,000 Hrs

## Technical Specifications

### Electrical:

- Voltage: 120V AC 50/60Hz
- Power Factor: >0.90
- Wattage: 18W/20W/22W
- Efficacy: 120 LPW
- Total Harmonic Distortion: ≤20 %

### Mechanical:

- Aluminum Housing and Steel Back Plate
- Oil-Rubbed Bronze Finish
- Maximum Ambient Temperature: 50~113°F
- IP66, Suitable for outdoor use
- 7-Year Warranty

### Lighting:

- Multi CCT (Selectable Switch On The Back)
- Lens: Acrylic PC lens
- Total Lumens: 2640LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 120°
- Rated life: 70,000 Hrs

### Applications:

- LED outdoor wall light with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.






Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



W/G-02022020

## Photometrics: LDSX-L-18-22W-MCTP-ORB

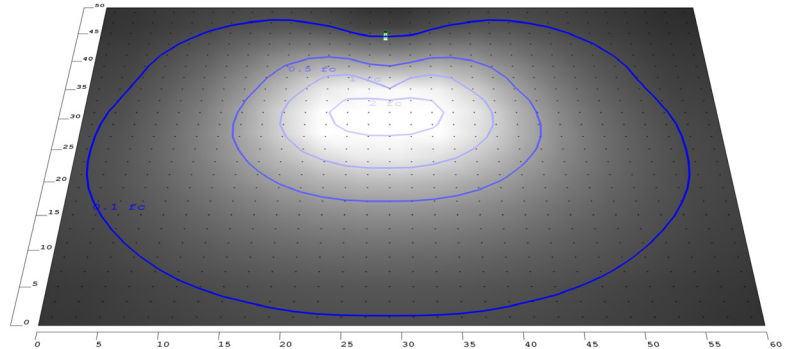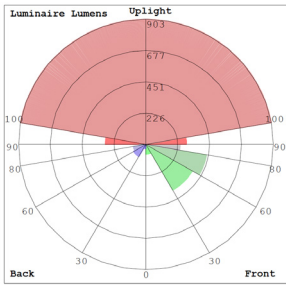

BUG Rating: B0-U4-G3

22W, 5000K, Area 50'x 60' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: LDSX-L-18-22W-MCTP-ORB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LDSX-L-18-22W-MCTP-ORB	18W 20W 22W	120V	2160LM 2400LM 2640LM	3000K/4000K/5000K	B0-U4-G3	120

## Sample Ordering

Model	Size	Watt	Max. Watt	Color Temp.	Finish					
LDSX	-	MCTP	-	18	-	22W	-	MCTP	-	ORB

## Factory-Installed Options:

Blank = No Accessor  
 OPT-EM-LDSX-L = EMERGENCY BACKUP BATTERY  
 OPT-277V-LDS = EXTERNAL BOX  
 OPT-PC-BI = BUTTON  
 OPT-SEN-LDS-BR = PROGRAMMABLE MICROWAVE BLLEVEL  
 OPT-SEN-LDS-GY = PROGRAMMABLE MICROWAVE BLLEVEL  
 WEC-8RC = OPTIONAL REMOTE CONTROL

## FACTORY-INSTALLED OPTIONS:



OPT-EM-LDSX-L  
1-1/4" Additional Depth



OPT-SEM-LDS-BR  
OPT-SEM-LDS-GY



OPT-PC-BI



WEC-8RC

