



- Available up to 85W replacing up to 400W HID.
- Mimics traditional HID lamps in shape, size & light distribution.
- Ideal for decorative post top fixtures w/ glass lenses.
- Rated for enclosed fixtures.
- Available in 2200K, 4000K and 5000K.

----- • **DESIGNED W/ GLASS LENSES IN MIND**



120-277V
ALSO WORKS
ON 208V & 240V

UL TYPE B
BALLAST
BYPASS


MEDIUM +
MOGUL BASE


ENCLOSED
FIXTURES

360°
BEAM
ANGLE

80+
CRI


50,000hrs
RATED LIFE


-40°F TO 113°F
OPERATING
TEMP


SURGE
PROTECTION**

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT	BASE	DLC CODE
LED-8060E40*	197810025245	100W HID	15W	2700	4000K	E26	N/A
LED-8061E40	844006009571	150W HID	28W	4000			N/A
LED-8062M40	844006009595	175W HID	32W	5500		EX39	S-R0KVCD
LED-8063M40	844006009618	250W HID	45W	7500			S-28J27V
LED-8064M40	844006009632	320W HID	54W	10000			S-7H6M3B
LED-8065M40*	197810025283	400W HID	85W	15725			N/A


*LED-8060 & LED-8065 IN STOCK JANUARY 2025

**LED-8060 HAS 2kA SURGE PROTECTION





DIMENSIONS

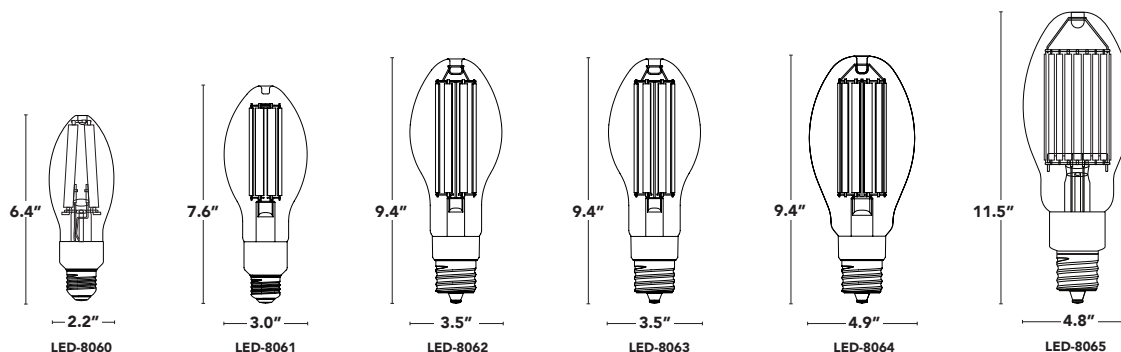

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT	BASE	DLC CODE
LED-8060E22	197810025238	100W HID	15W	2250	2200K	E26	N/A
LED-8060E40	197810025245			2700	4000K		
LED-8060E50	197810025252				5000K		
LED-8061E22	844006009564	150W HID	28W	3500	2200K		
LED-8061E40	844006009571			4000	4000K		
LED-8061E50	844006009649				5000K		
LED-8062M22	844006009588	175W HID	32W	4500	2200K	EX39	S-GWK504
LED-8062M40	844006009595			5500	4000K		S-R0KVCD
LED-8062M50	844006009656				5000K		S-QMVCPP
LED-8063M22	844006009601	250W HID	45W	6000	2200K		S-4TT6TD
LED-8063M40	844006009618			7500	4000K		S-28J27V
LED-8063M50	844006009663				5000K		S-HVHFS4
LED-8064M22	844006009625	320W HID	54W	8000	2200K		S-VTX47S
LED-8064M40	844006009632			10000	4000K		S-7H6M3B
LED-8064M50	844006009670				5000K		S-N8ZBD7
LED-8065M22	197810025269	400W HID	85W	13600	2200K		N/A
LED-8065M40	197810025276			15725	4000K		
LED-8065M50	197810025283				5000K		