

# NI0B-2RNDC

## 2" Iolite Round Reflector with Round Aperture

Source: 14W to 28W LED  
800lm to 2500lm

Type

Project

Catalog No.

Notes

### PRODUCT DESCRIPTION

2" Iolite luminaires can be specified for use with Iolite new construction or remodel housings. Deep regressed cone reflectors optimize visual cut-off.

### FEATURES

- 800lm, 1000lm, 1500lm, 2000lm or 2500lm LED packages
- 2700K, 3000K, 3500K, 4000K, 5000K @ 90+ CRI
- Comfort Dim (warm dimming) also available in 800lm only
- Flood optic, narrow flood and spot optics (included)
- 5-Year limited warranty

### SPECIFICATION

**Construction:** Trims are constructed of heat dissipating, die-cast aluminum. The aluminum die-cast LED heat sink is threaded to fit the reflector and transfer heat.

**Mounting:** Trim includes friction blades to mount securely to housing.

### OPTICS

**800-1000lm:** Each luminaire includes field changeable optics (23° spot, 28° narrow flood and 29° flood - pre-installed). Premium 15° and 25° TIR optics are also available.

**1500-2500lm:** Each luminaire includes field changeable TIR optics (38° spot, 44° narrow flood - pre-installed and 48° flood).

### ELECTRICAL

**Lumens / Wattage:** 800lm / 14W, 1000lm / 14W, 1500lm / 20W, 2000lm / 24W, 2500lm / 28W

**Color Temperature:** 2700K, 3000K, 3500K, 4000K, 5000K

**Color Rendering Index:** 90+ CRI

**Operating Temperature:** 0°C to 40°C

**Lifetime:** 50,000 hours @ L70

**Comfort Dim:** Comfort Dim color tunes the temperature from a bright 3100K, to a romantic and comfortable 2000K on a gradual, even curve. Available in 800lm only.

**Dimming:** Specified by housing

### COMPATIBLE HOUSINGS

Luminaires are compatible with respective Iolite housings manufactured by Nora Lighting.

CATALOG NO.	DESCRIPTION	LUMENS / WATTAGE
<a href="#">NHIOICD-28</a>	ICAT New Construction	800-1000lm / 14W
<a href="#">NHIOICDCP-28</a>	Chicago Plenum	800-1000lm / 14W
<a href="#">NHRIOIC-28</a>	ICAT Remodel	800-1000lm / 14W
<a href="#">NHIOICD-215</a>	ICAT New Construction	1500lm / 20W
<a href="#">NHIOICDCP-215</a>	Chicago Plenum	1500lm / 20W
<a href="#">NHIOICD-220</a>	ICAT New Construction	2000lm / 24W
<a href="#">NHIOICDCP-220</a>	Chicago Plenum	2000lm / 24W
<a href="#">NHIOICD-225</a>	ICAT New Construction	2500lm / 28W
<a href="#">NHIOICDCP-225</a>	Chicago Plenum	2500lm / 28W


**Accessories:** Luminaires can accommodate (1) hex louver and (1) translucent deco collar or opaque snoot, no accessory holder is required, see accessories page. Flush mount mud ring is available to give the appearance of a trimless, compatible with new construction housing only.

### LABELS AND LISTINGS

- cULus Listed for Wet Locations
- ENERGY STAR certified
- [5-Year Limited Warranty](#)
- RoHS Compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2019



### PRODUCT IMAGES & DIMENSIONS




**NI0B-2RNDC**  
Round Deep Reflector  
Non-Adjustable



**BB**  
Black Reflector  
Black Flange



**BW**  
Black Reflector  
White Flange



**BZ**  
Bronze Reflector  
Bronze Flange



**CHMPW**  
Champagne Haze Reflector  
Matte Powder White Flange



**CMPW**  
Specular Clear Reflector  
Matte Powder White Flange



**HW**  
Haze Reflector  
White Flange



**HZMPW**  
Haze Reflector  
Matte Powder White Flange



**MPW**  
Matte Powder White Reflector  
Matte Powder White Flange



**NN**  
Natural Metal Reflector  
Natural Metal Flange



**WW**  
White Reflector  
White Flange

## 2" Iolite Round Reflector with Round Aperture - Dedicated Housing Required

Trim Type	Color Temperature	Finish	Lumens / Wattage
<b>NI0B-2RNDC</b> = Round Reflector with Round Aperture	<b>50X</b> = 5000K*	<b>BB</b> = Black / Black	(blank) = 800lm / 14W
	<b>CDX</b> = Comfort Dim†	<b>BW</b> = Black / White	
	<b>27X</b> = 2700K	<b>BZ</b> = Bronze / Bronze	<b>/10</b> = 1000lm / 14W <b>/HL</b> = 1500-2500lm (varies by housing)
	<b>30X</b> = 3000K	<b>CHMPW</b> = Champagne / Matte Powder White	
	<b>35X</b> = 3500K	<b>CPW</b> = Specular Clear / Matte Powder White	
	<b>40X</b> = 4000K	<b>HW</b> = Haze / White	
<b>50X</b> = 5000K	<b>HZMPW</b> = Haze / Matte Powder White		
	<b>MPW</b> = Matte Powder White		
	<b>NN</b> = Natural Metal / Natural Metal		
	<b>WW</b> = White / White		

\* 5000K LED modules in 800lm are while supplies last

† Comfort Dim available in 800lm only and 1" Iolite uses a different dimming curve than 2" & 4" Iolite

## Compatible Housings

Housing Type
<b>NHIOICD-28</b> = ICAT New Construction / 800-1000lm / 14W
<b>NHIOICDCP-28</b> = Chicago Plenum / 800-1000lm / 14W
<b>NHRIOIC-28</b> = ICAT Remodel / 800-1000lm / 14W
<b>NHIOICD-215</b> = ICAT New Construction / 1500lm / 20W
<b>NHIOICDCP-215</b> = Chicago Plenum / 1500lm / 20W
<b>NHIOICD-220</b> = ICAT New Construction / 2000lm / 24W
<b>NHIOICDCP-220</b> = Chicago Plenum / 2000lm / 24W
<b>NHIOICD-225</b> = ICAT New Construction / 2500lm / 28W
<b>NHIOICDCP-225</b> = Chicago Plenum / 2500lm / 28W

Example: **NI0B-2RNDC50XWW** = 2" Iolite Round Reflector with Round Aperture, 5000K, White finish, 800lm / 14W

## 2" Iolite Accessories


### 2" Iolite Round Reflector with Round Aperture

Type	
Project	
Catalog No.	
Notes	

#### FIELD CHANGEABLE OPTICS

Iolite luminaires include spot, narrow flood and flood optics. Optics can be changed in the field by removing LED module from die-cast trim. Replacement optics include an optional frosted lens.

**Note:** Frosted filter-optics and Premium TIR optics are not compatible with /HL LED modules.

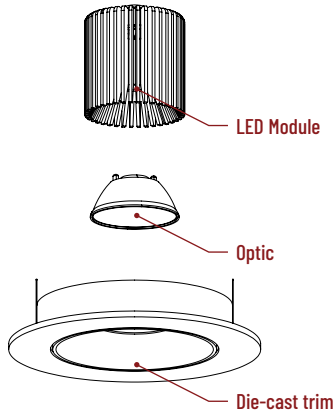

Frosted Filter-Optic

NIO-REFL15FR	15° Optic
NIO-REFL25FR	27° Optic
NIO-REFL38FR	40° Optic
NIO-REFL60FR	60° Optic

Optic assembly includes optional frosted lens. 27°, 40° and 60° optics are included with 800lm and 1000lm modules.  
**Not compatible with /HL LED module.**



Premium TIR Optics


NIO-REFLTIR15	15° Optic
NIO-REFLTIR25	25° Optic

**Not compatible with /HL LED module or Comfort Dim (CDX) technology**

#### ACCESSORIES

Iolite accessories can be added at any point in the design process. Accessories easily install between LED module and die-cast trim.

Luminaire will accommodate (1) hex louver and (1) collar accessory, no accessory holder required.

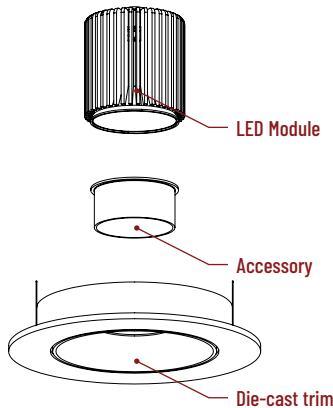

Translucent Decorative Collar

NIO-AS14(color)	5/8" length
NIO-AS19(color)	3/4" length
NIO-AS26(color)	1" length
<b>Color:</b>	
AM (amber), BLU (blue), FR (frosted), R (red)	

Translucent collars color the aperture with the specified color while producing white general light. Collars are available in different lengths. Use to add interest, create a theme, match a theme or define a space.



Opaque Collar Snoot

NIO-AS14(color)	5/8" length
NIO-AS19(color)	3/4" length
NIO-AS26(color)	1" length
<b>Color:</b>	
BLK (black), MPW (matte powder white), WH (white)	

Opaque snoot greatly reduces aperture brightness while preserving light output. (Note: Black snoot will reduce light)



Hex Cell Louver

NIO-HC	Black
--------	-------

Hex cell louver subtly reduces aperture brightness by reducing light output by about 20%.

#### FLUSH MOUNT

2" Iolite trims can be installed flush with the drywall for a flush mount appearance. A flush mount mud ring is installed after the drywall and a professional drywall finisher floats the ceiling to blend in the mud ring.



Flush Mount Mud Ring

NIO-FMMR-2R	Round Mud Ring
-------------	----------------

Mounts trim flush to ceiling with flange visible.  
**Mud ring attaches to drywall. Only for use with NH10ICD-28 or NH10ICDCP-28 new construction housings and NIOB-2R trims.**  
Dimensions: 7-1/8" diameter 1/2" thick

# PHOTOMETRICS

## 2" Iolite Round Reflector with Round Aperture 1000 lumens

Type


Project

Catalog No.

Notes

### Test Information

Test Number: NTR11271  
 Part Number: NI0B-2RNDC30XWW/10  
 Beam Spread: 23° Spot  
 Lumens: 1090lm  
 Wattage: 13.1W  
 Efficacy: 83lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.4  
 Spacing Criteria (90°-270°): 0.4



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	237fc	1'-7"
6'	105fc	2'-6"
8'	59.2fc	3'-4"
10'	37.9fc	4'-1"
12'	26.3fc	4'-11"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	869	79.7
0-40	935	85.8
0-60	1037	95.1
0-90	1086	99.6
90-180	4	0.4
0-180	1090	100

### Candela Table

Vertical Angles	Candela
0	3788
5	3107
15	1341
25	547
35	95
45	74

### Test Information

Test Number: NTR11270  
 Part Number: NI0B-2RNDC30XWW/10  
 Beam Spread: 29° Narrow Flood  
 Lumens: 1058lm  
 Wattage: 13.1W  
 Efficacy: 81lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.48  
 Spacing Criteria (90°-270°): 0.5



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	174fc	2'
6'	77.3fc	3'
8'	43.5fc	4'-1"
10'	27.8fc	5'-1"
12'	19.3fc	6'-1"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	833	78.8
0-40	900	85.1
0-60	1003	94.8
0-90	1054	99.7
90-180	4	0.3
0-180	1058	100

### Candela Table

Vertical Angles	Candela
0	2782
5	2171
15	1340
25	591
35	92
45	74

### Test Information

Test Number: NTR11269  
 Part Number: NI0B-2RNDC30XWW/10  
 Beam Spread: 29° Flood  
 Lumens: 1070lm  
 Wattage: 13.1W  
 Efficacy: 82lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.44  
 Spacing Criteria (90°-270°): 0.46



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	146fc	2'
6'	64.8fc	3'
8'	36.4fc	4'-1"
10'	23.3fc	5'-1"
12'	16.2fc	6'-1"

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	777	72.6
0-40	895	83.6
0-60	1012	94.6
0-90	1068	99.8
90-180	2	0.2
0-180	1070	100

### Candela Table

Vertical Angles	Candela
0	2331
5	1821
15	1131
25	706
35	175
45	85

### Lumen Output Multipliers

Color Temperature: 2700K (0.98), 3000K (1.00), 3500K (1.09), 4000K (1.19), 5000K (1.16)

# PHOTOMETRICS

## 2" Iolite Round Reflector with Round Aperture 1500 lumens

Type


Project

Catalog No.

Notes

### Test Information

Test Number: NTR1422  
 Part Number: NI0B-2RNDC30XWW/HL  
 Beam Spread: 38° Spot  
 Lumens: 1667lm  
 Wattage: 19.8W  
 Efficacy: 84lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.64  
 Spacing Criteria (90°-270°): 0.64



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
6'	90.8fc	4'-1"
8'	51.1fc	5'-6"
10'	32.7fc	6'-11"
12'	22.7fc	8'-4"
14'	16.7fc	9'-7"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	1315	78.9
0-40	1473	88.4
0-60	1600	96
0-90	1662	99.7
90-180	5	0.3
0-180	1667	100

### Candela Table

Vertical Angles	Candela
0	3267
5	3216
15	2243
25	862
35	246
45	90

### Test Information

Test Number: NTR1425  
 Part Number: NI0B-2RNDC30XWW/HL  
 Beam Spread: 48° Narrow Flood  
 Lumens: 1843lm  
 Wattage: 19.86W  
 Efficacy: 93lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.78  
 Spacing Criteria (90°-270°): 0.8



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
6'	73.4fc	5'-5"
8'	41.3fc	7'-1"
10'	26.4fc	8'-11"
12'	18.3fc	10'-8"
14'	13.5fc	12'-6"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	1401	76
0-40	1663	90.2
0-60	1783	96.8
0-90	1838	99.7
90-180	5	0.3
0-180	1843	100

### Candela Table

Vertical Angles	Candela
0	2642
5	2600
15	2101
25	1236
35	401
45	93

### Test Information

Test Number: NTR1428  
 Part Number: NI0B-2RNDC30XWW/HL  
 Beam Spread: 44° Flood  
 Lumens: 1416lm  
 Wattage: 19.65W  
 Efficacy: 72lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.66  
 Spacing Criteria (90°-270°): 0.66



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
6'	58.8fc	4'-10"
8'	33.1fc	6'-5"
10'	21.2fc	8'
12'	14.7fc	9'-7"
14'	10.8fc	11'-2"

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	971	68.6
0-40	1159	81.9
0-60	1329	93.8
0-90	1413	99.8
90-180	3	0.2
0-180	1416	100

### Candela Table

Vertical Angles	Candela
0	2118
5	2012
15	1366
25	901
35	273
45	122

### Lumen Output Multipliers

Color Temperature: 2700K (0.92), 3000K (1.00), 3500K (1.1), 4000K (1.12), 5000K (1.18)

# PHOTOMETRICS

## 2" Iolite Round Reflector with Round Aperture 2000 lumens

Type


Project

Catalog No.

Notes

### Test Information

Test Number: NTR1423  
 Part Number: NI0B-2RNDC30XWW/HL  
 Beam Spread: 38° Spot  
 Lumens: 1892lm  
 Wattage: 23.54W  
 Efficacy: 80lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.64  
 Spacing Criteria (90°-270°): 0.64



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
8'	58.1fc	5'-6"
10'	37.2fc	6'-11"
12'	25.8fc	8'-4"
14'	19fc	9'-8"
16'	14.5fc	11'

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	1495	79
0-40	1663	87.9
0-60	1816	96
0-90	1886	99.7
90-180	6	0.3
0-180	1892	100

### Candela Table

Vertical Angles	Candela
0	3718
5	3663
15	2562
25	973
35	276
45	101

### Test Information

Test Number: NTR1426  
 Part Number: NI0B-2RNDC30XWW/HL  
 Beam Spread: 48° Narrow Flood  
 Lumens: 2088lm  
 Wattage: 23.6W  
 Efficacy: 88lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.78  
 Spacing Criteria (90°-270°): 0.8



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
8'	46.8fc	7'-1"
10'	29.9fc	8'-11"
12'	20.8fc	10'-8"
14'	15.3fc	12'-6"
16'	11.7fc	14'-4"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	1588	76.1
0-40	1885	90.3
0-60	2020	96.8
0-90	2081	99.7
90-180	6	0.3
0-180	2088	100

### Candela Table

Vertical Angles	Candela
0	2993
5	2948
15	2381
25	1402
35	453
45	105

### Test Information

Test Number: NTR1429  
 Part Number: NI0B-2RNDC30XWW/HL  
 Beam Spread: 44° Flood  
 Lumens: 1666lm  
 Wattage: 23.53W  
 Efficacy: 71lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.66  
 Spacing Criteria (90°-270°): 0.68



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
8'	38.9fc	6'-5"
10'	24.9fc	8'
12'	17.3fc	9'-7"
14'	12.7fc	11'-2"
16'	9.7fc	12'-10"

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1142	68.5
0-40	1349	81
0-60	1561	93.7
0-90	1661	99.7
90-180	5	0.3
0-180	1666	100

### Candela Table

Vertical Angles	Candela
0	2492
5	2372
15	1606
25	1063
35	320
45	144

### Lumen Output Multipliers

Color Temperature: 2700K (0.94), 3000K (1.00), 3500K (1.13), 4000K (1.13), 5000K (1.2)

# PHOTOMETRICS

## 2" Iolite Round Reflector with Round Aperture 2500 lumens

Type


Project

Catalog No.

Notes

### Test Information

Test Number: NTR1424  
 Part Number: NI0B-2RNDC30XWW/HL  
 Beam Spread: 38° Spot  
 Lumens: 2142lm  
 Wattage: 28.47W  
 Efficacy: 75lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.64  
 Spacing Criteria (90°-270°): 0.64



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
10'	43.fc	6'-10"
12'	30fc	8'-2"
14'	22fc	8'-4"
16'	16.9fc	10'-11"
18'	13.3fc	12'-4"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	1703	79.5
0-40	1886	88.1
0-60	2057	96
0-90	2134	99.6
90-180	8	0.4
0-180	2142	100

### Candela Table

Vertical Angles	Candela
0	4318
5	4253
15	2944
25	1076
35	299
45	114

### Test Information

Test Number: NTR1427  
 Part Number: NI0B-2RNDC30XWW/HL  
 Beam Spread: 48° Narrow Flood  
 Lumens: 2359lm  
 Wattage: 28.08W  
 Efficacy: 84lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.78  
 Spacing Criteria (90°-270°): 0.8



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
10'	33.8fc	8'-11"
12'	23.5fc	10'-8"
14'	20.8fc	10'-8"
16'	13.2fc	14'-4"
18'	10.4fc	16'

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	1796	76.1
0-40	2130	90.3
0-60	2283	96.8
0-90	2352	99.7
90-180	7	0.3
0-180	2359	100

### Candela Table

Vertical Angles	Candela
0	3385
5	3331
15	2691
25	1583
35	508
45	118

### Test Information

Test Number: NTR1430  
 Part Number: NI0B-2RNDC30XWW/HL  
 Beam Spread: 44° Flood  
 Lumens: 1950lm  
 Wattage: 28.32W  
 Efficacy: 69lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180°): 0.66  
 Spacing Criteria (90°-270°): 0.68



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
10'	29.1fc	8'
12'	20.2fc	9'-7"
14'	17.3fc	9'-7"
16'	11.4fc	12'-10"
18'	9fc	14'-5"

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1336	68.5
0-40	1579	80.9
0-60	1827	93.7
0-90	1945	99.7
90-180	6	0.3
0-180	1950	100

### Candela Table

Vertical Angles	Candela
0	2910
5	2763
15	1878
25	1243
35	371
45	168

### Lumen Output Multipliers

Color Temperature: 2700K (0.96), 3000K (1.00), 3500K (1.14), 4000K (1.16), 5000K (1.24)