

Project:

Type:

Prepared By:

Date:



UPC: 019813834351

Features and Benefits

- Replacement for High output incandescent/halogen or ceramic metal halide HID Lamps
- Commercial Grade
- Large metal heatsink for optimal heat dissipation
- In HID retrofit applications - Integral Driver enables lamp to be wired directly to line voltage. Must bypass ballast
- Produces rich and vibrant colors >90CRI
- Energy efficient replacement for incandescent and halogen PAR lamps
- Constructed from durable materials which lowers risk of breakage
- Rated for use in enclosed and open fixtures in dry and damp locations
- Single optic and full face lens for precise beam angle control
- Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs
- Title 20 Compliant, Energy Star Compliant, UL Listed
- Non-dimmable

Technical Specifications

Performance

Product Type:
HID Replacement

Input Wattage:
26W

Lumens:
2,400lm

Efficacy:
92lm/W

L70 Lifespan:
25,000 Hours

Construction

Bulb Shape:
PAR38

For Use Outdoors in Open Fixtures:
No

LED Characteristics

Color Temperature:
4000K Cool White

Color Accuracy (CRI):
90 CRI

Beam Angle:
25°

Installation

Base Type:
E26 Edison

Electrical

Power Factor:
0.9

Operating Temperature:
-25°C to 40°C

Dimmable:
No

Input Voltage:
120-277V AC

Operating Frequency:
60 Hz

Input Current @ 120V:
225mA

Input Current @ 277V:
105mA

Flicker:
<30%

Other

Warranty:
RAB warrants that our LED products will be free from defects in materials and workmanship for a period of four (4) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Compliance

UL Listed:
Yes

California Energy Commission (CEC) Status:
Lawful for Sales in California


Technical Specifications (continued)

\

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	6	15.4	10.4	7
PALLET	480	50.1	37.6	47.6

Dimension

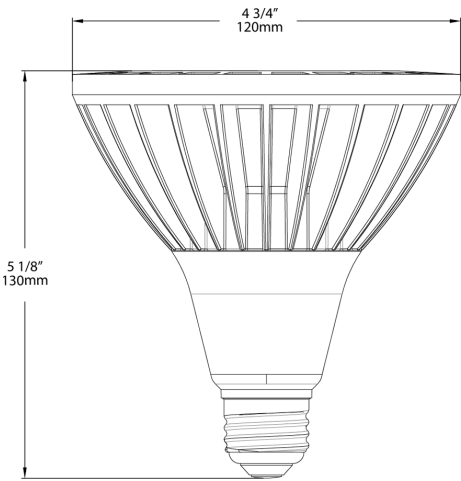

Light Distribution

