




Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	20/15/10W
120V	0.17A/0.13A/0.09A	Color Temp	2700K/3000K/3500K/4000K/5000K
208V	0.00A/0.00A/0.00A	Color Accuracy	94-96 CRI
240V	0.00A/0.00A/0.00A	L70 Lifespan	100,000 Hours
277V	0.00A/0.00A/0.00A	Lumens	872-1765 lm
Input Watts	9.9-19.8W	Efficacy	80-99.6 lm/W

Technical Specifications

<p>Field Adjustability</p> <p>Field Adjustable: Field Adjustable Light Output: 20/15/10W (factory default 20W) Color Temperature Selectable: 2700K, 3000K, 3500K, 4000K and 5000K (factory default 4000K)</p> <p>Compliance</p> <p>UL Listed: Suitable for dry locations</p> <p>IP Rating: IP20</p> <p>LED Characteristics</p> <p>LEDs: Long-life, high-efficacy, COB (Chip on Board) LEDs</p> <p>Color Temperature: 2700/3000/3500/4000/5000K CCT Adjustable</p> <p>Electrical</p> <p>Driver: Constant Current, Class 2, 120V, 60 Hz, 120V 10W: 0.19A 8W: 0.14A 6W: 0.10A</p> <p>Dimming Driver: 120V TRIAC Dimmers</p>	<p>Aux Power Supply: No</p> <p>Dim to Off: No</p> <p>Surge Protection: Ring Wave L-N:2.5 kV, LN-PE 2.5 kV</p> <p>Construction</p> <p>Cold Weather Starting: The minimum starting temperature is -4°F (-20°C)</p> <p>Maximum Ambient Temperature: Suitable for use in up to 104°F (40°C)</p> <p>Housing: Aluminum</p> <p>Reflector: Polycarbonate</p> <p>Finish: Formulated for high durability and long-lasting color</p> <p>Performance</p> <p>Lifespan: 100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations</p>	<p>Installation</p> <p>Mounting: H-Track Mount</p> <p>Optical</p> <p>Optics: 36°</p> <p>Other</p> <p>5-Year Limited Warranty: The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.</p>
---	---	---

Dimensions

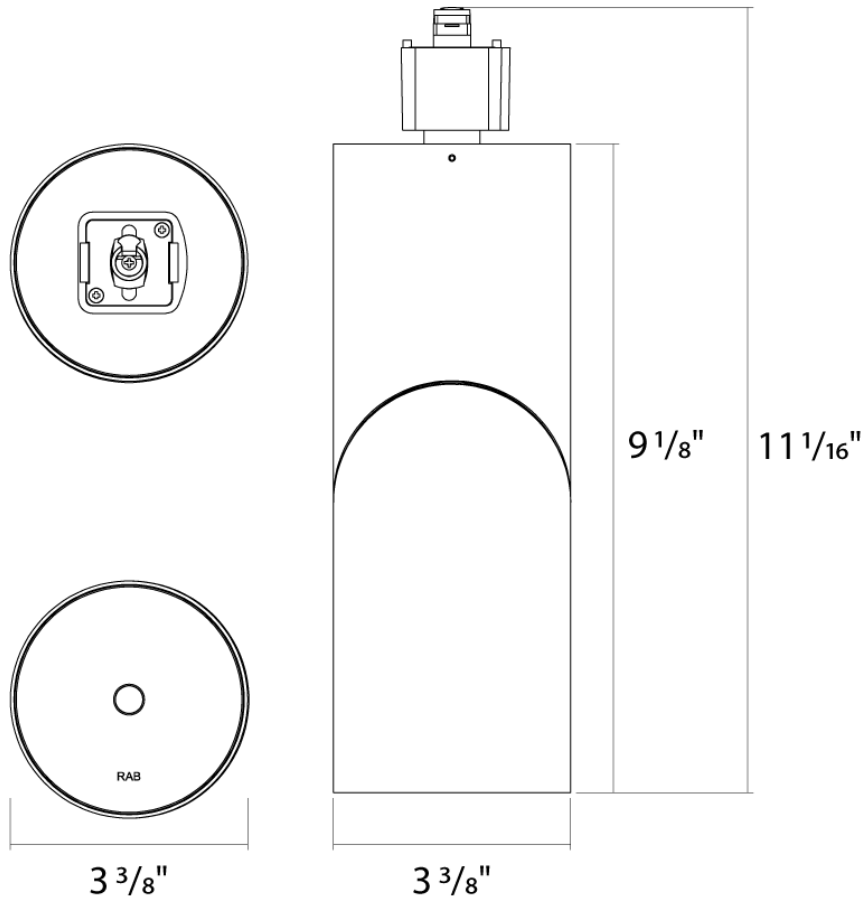

Ordering Matrix

Family	Size/Wattage	Mounting	Color Temp	Optics	Finish	Driver
PIVOT	L		Blank			
	S = 8W M = 10/8/06 L = 20/15/10	Blank = H-Track Mount	Blank = 3000/4000/5000K CCT Adjustable Blank = 2700/3000/3500/4000/5000K CCT Adjustable	Blank = 36° 24D = 24°	Blank = White B = Black	Blank = 120V, TRIAC Dimming