



## PROLIGHTING 48" LED Vapor Tight Fixture

The PROLIGHTING 48" LED vapor tight fixtures are a durable and versatile luminaire option for your wet location application. This fixture is both wattage selectable and CCT-tunable, allowing the user to select between 3 different wattage/lumen output levels and 3 different white light color temperatures to find just the right light output to suit the application. Their low-profile design optimizes ease of storage and installation, and each fixture is constructed with a UV-resistant polycarbonate lens that is performance engineered to reduce glare while maximizing light output. The tool-less design driver cover snaps into the housing for easy installation compared to other vapor tight fixtures (see secondary picture above). The PROLIGHTING 48" LED vapor tight fixtures are an excellent option to provide long lasting, energy efficient LED illumination for your car wash, food processing, warehouse, refrigeration or other wet location applications.


### FEATURES

- 120-277V operation
- 0-10V dimmable
- CCT-selectable: choose between warm-neutral 35K, neutral 40K or daylight 50K white light color temperatures
- Wattage-selectable: choose between 40W / 5,200 lumens, 50W / 6,500 lumens, or 60W / 7,200 lumens output options
- NEMA 4X rated enclosure
- Tool-less design driver cover allows for quick and easy installation compared to other vapor tights
- Performance engineered UV-resistant polycarbonate lens
- High quality LED chips provide high efficiency, heat dissipation, stability, and lumen maintenance
- Low-profile design
- Operating temp: -22° to 104° F
- NSF rated
- 50,000 hour rated
- 5 year warranty




Model Number	PL-VT4-60PS-3CCT
Input Power	60 Watt
Lumens	5,200 ~ 7,800
Lumens Per Watt	120 ~ 130lm/W
Input Voltage	120-277V
Color Temperature	CCT Tunable: 3500K, 4000K, 5000K
CRI	80+
Additional Function	0-10V dimming
Certification	cULus, NSF Rated, Wet Location Rated
Ingress Protection	IP66
Lens	Frosted Polycarbonate Lens
Rated Life	50,000 hours
Operating Temp	-22°F to 104°F (-30°C to 40°C)
Installation	Surface, Suspended
Length	47.25"
Width	4.88"
Height	3.63"
UPC	850027100395
Warranty	5 Years

INSTALLATION

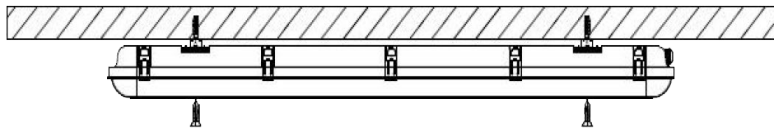

SURFACE MOUNTED

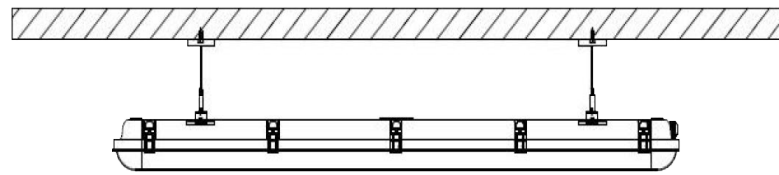

SUSPENDED

**Our easy installation vapor-tight fixture**

Complete the installation in 3 steps. Save your time and maintain cost.



VS

**Other common vapor-tight fixture**

