

R2FRRL, R2FSRL

2" FQ Trimless Remodel Housing

WAC

SPECIFICATIONS


Input	Universal 120-277V AC 50/60 Hz
Standards:	ETL & cETL
Dimming:	Electronic Low Voltage (ELV): 100%-1% TRIAC: 100%-1% 0-10V: 100-1%
Mounting:	Ceiling thickness: 1/2" - 1" Ceiling cutout: Ø 3 5/8"
Construction:	20 Gauge galvanized sheet Die-cast spackle flange included
Warranty:	5 year WAC Lighting product warranty

Fixture Type:

Catalog Number:

Project:


Location:

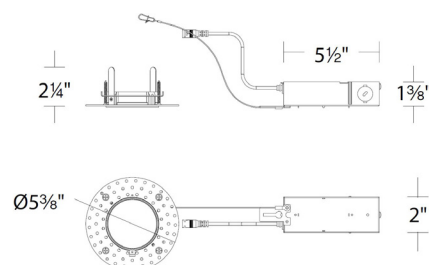

Model		Power	Rating	Compatible Trims
R2FRRL <i>Round Trimless</i>	1	15W	Non-IC	R2FRDL, R2FRD1L
	2	21W	Non-IC	R2FRAL, R2FRA1L
	3	25W	Non-IC	R2FRWL, R2FRW1L

R2FRRL- ____

Example: **R2FRRL-1**

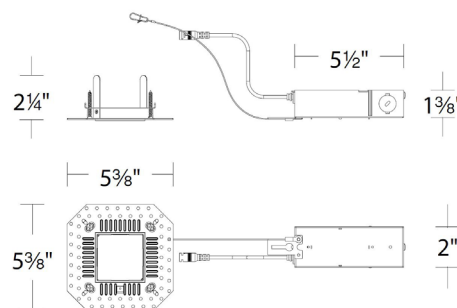

Model		Power	Rating	Compatible Trims
R2FSRL <i>Square Trimless</i>	1	15W	Non-IC	R2FSDL, R2FSD1L
	2	21W	Non-IC	R2FSAL, R2FSA1L
	3	25W	Non-IC	R2FSWL, R2FSW1L

R2FSRL- ____

Example: **R2FSRL-2**

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91761