



Color: Black

Weight: 0.5 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	14/11/7.5W
120V	0.06A	Color Temp	2700/3000/3500/4000/5000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	1300/1050/750 lm
Input Watts	14/11/7.5W	Efficacy	100

**Technical Specifications**

**Performance**

**Product Type:**

LED Trim - Metal

**Description:**

Available in 4" and 6" models with 3 power settings and 5 field-adjustable color temperatures. Offered with smooth or baffle trims. Ideal for applications with tighter budgets.

**Wattage Equivalency:**

60W/75W/100W Incandescent

**Input Wattage:**

14/11/7.5W

**Lumens:**

1,300/1,050/750lm

**Measured Lumens:**

7.5W  
 2700K: 767lm  
 3000K: 781lm  
 3500K: 792lm  
 4000K: 787lm  
 5000K: 773lm

11W  
 2700K: 1050lm  
 3000K: 1080lm  
 3500K: 1110lm  
 4000K: 1120lm  
 5000K: 1090lm

13W  
 2700K: 1300lm  
 3000K: 1330lm  
 3500K: 1360lm  
 4000K: 1370lm  
 5000K: 1340lm

**Efficacy:**

100lm/W

**L70 Lifespan:**

50,000-Hour LED lifespan based on IES LM-70 results

**Electrical**

**Driver:**

Constant Current

**THD:**

≤20%

**Power Factor:**

≥0.9

**Dimmable:**

Yes, dimmable down to 10% on compatible TRIAC/ELV dimming systems. See Dimmer Compatibility List.

**Input Voltage:**

120V

**Operating Frequency:**

60 Hz

**Input Current @ 120V (mA):**

130mA

**Operating Temperature:**

-4°F to 104°F (-20 to 40°C)

**Flicker:**

≤30%

**LED Characteristics**

**Beam Angle:**

85°±10°

## Technical Specifications (continued)

### Color Temperature:

Field-adjustable via dip switch  
2700/3000/3500/4000/5000K

### Color Accuracy (CRI):

90 CRI

### R9 Value:

High color performance with R9 greater than 50

### Color Consistency:

<4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color (2700K/5000K)

### Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

## Installation

### Mounting:

Recessed with housing

## Construction

### Size:

6"

### Shape:

Round

### Finish:

Black

### Material:

Constructed from spun aluminum

### Trim Style:

Smooth Splay

### Lens Finish:

Frosted

### Lens:

Single optic and full-face lens for precise beam angle control

## Compliance

### Listings:

UL Classified, UL Recognized

### Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

### IC Rated:

No

### Air Tight:

No

### Energy Star Approved:

This product is ENERGY STAR® Certified.

### Certification Model Number:

DLR0173(R34X-6-B)

### California Title 20 Compliant:

Can be used to conform with the requirements of California Title 20

### California Title 24 JA8 Compliant:

Can be used to conform with the requirements of California Title 24 Part 6

### California Energy Commission (CEC) Status:

Lawful for Sales in California

### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

### RoHS:

Mercury and UV free. RoHS-compliant components.

### FCC:

Complies with Part 15 of the FCC Rules

### Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

## Other

### Compatible Accessories:

RFLED-GOOF-6R-8R-W  
6"-8" Goof ring round white

DLTRIM/R6RS-BN

6" Color trim round smooth brushed nickel

DLTRIM/R6RS-BRZ

6" Color trim round smooth bronze

DLTRIM/R6RS-B

6" Color trim round smooth black

DLTRIM/R6RB-BN

6" Color trim round baffle brushed nickel

DLTRIM/R6RB-BRZ

6" Color trim round baffle bronze

DLTRIM/R6RB-B

6" Color trim round baffle black


RFLED-RETROBAND

6" Retrofit band

### 5-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Dimensions**

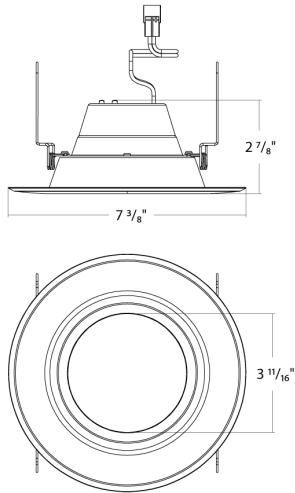

**Features**

- 4" & 5/6" Recessed LED trims are compatible with most recessed housings
- 3 Selectable lumen outputs: 4" - 500/600/700 lumens, 6" - 750/1,050/1,300 lumens
- 5 Color temperature selectable 2700K, 3000K, 3500K, 4000K, & 5000K
- Constructed from die-cast aluminum available in a smooth splay reflector or baffled trim with a smooth flat frosted polycarbonate lens
- Available in Painted White or Black finish. Optional color trim overlays sold separately.
- Dimmable down to 10% with compatible TRIAC/ELV dimmers, see dimmer compatibility list
- 5-year warranty, 50,000 hours lifespan, Title 24 JA8 and Title 20 compliant, wet location rated, Air Tight

**Ordering Matrix**

Family	Size/Wattage	Shape	CRI/Color Temp	Driver	Finish	Trim
R34X		6			B	
	4 = 4", 7/6/5W 6 = 6", 14/11/7.5W	Blank = Round	Blank = 90 CRI, 2700/3000/3500/4000/5000K CCT Adjustable	Blank = 120V	Blank = White	Blank = Smooth B = Baffle