



Product Description

The LED Area Security Light is a great solution for illuminating garages, sheds and driveway areas. It is easy to mount and runs on 120V. A photocell is included standard to automatically turn it on and off between night and daytime without the need for a switch.

Features:

- Rugged die cast aluminum housing with corrosion resistant polyester powder coat finish
- 35W
- CCT 5000K
- Integral photocell automaticall turns fixture on or off for dusk to dawn operation

Installation:

- Direct Wall Mount
- Pole Mount (arm sold separately)

Construction:

- Rugged die cast housing with corrosion resistant polyester powder coat finish
- UV stabilized impact resistant polycarbonate lens

Listings:

- ETL for Wet Locations
- IP65
- FCC



Stocked Items

ORDER CODE	MODEL NUMBER	DESCRIPTION
111637	SBL35120V-5KBPC	35W LED AREA LIGHT, 120V, 5000K, 80 CRI, BRONZE FINISH, PHOTOCELL

Accessories

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
104096	DBL-ARM24	24" ARM AND HARDWARE	



3-year standard warranty (further details available at www.maxlite.com/warranties)




Specifications:

Power Consumption (W)	35W
Lumens (lm)	4,000 lm
Efficacy (lm/W)	114 lm/w
CRI	>80
Color Temperature (K)	5000K
Distribution	Type V
Voltage	120V
Lumen Maintenance (L70)	>100,000 hrs
Controls	Photocell included
Mounting	Wall, arm sold separately
Lens	UV Stabilized polycarbonate
Operating Temperature	-20°C/-4°F - 40°C/104°F
Weight	1.73lb (0.79kg)
Listings	ETL, FCC, IP65
Warranty	3 years



Dimensions

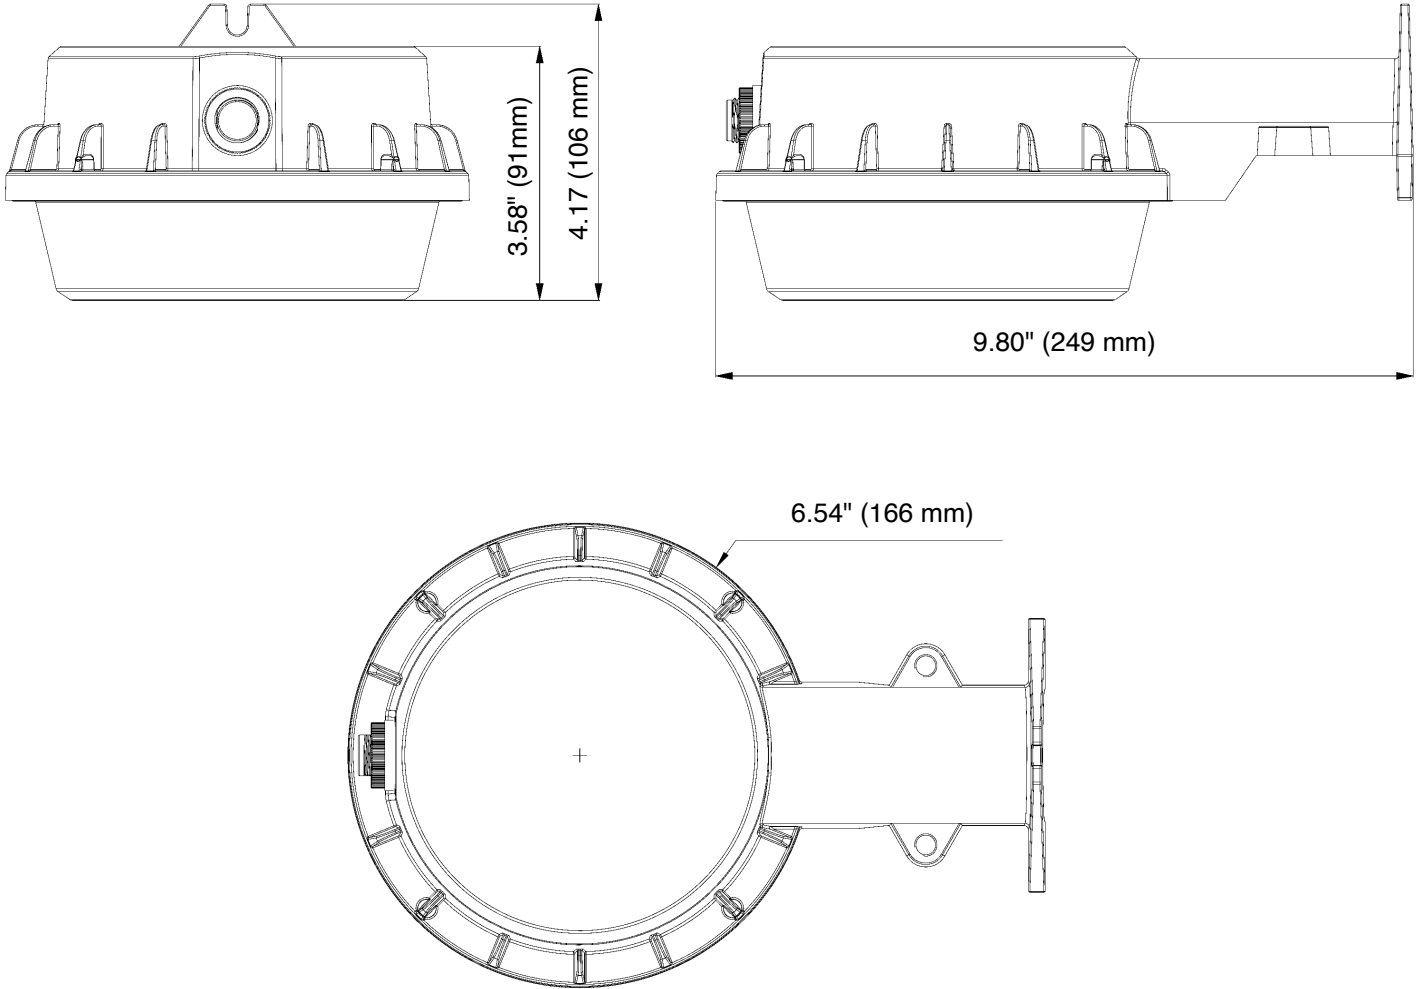

Photometric Footprint

ISOFOOTCANDLE:


Each gridline represents one mounting height.
 For mounting heights other than noted multiply FC by the below factor.

$$\text{Factor} = \frac{\text{Chart's Mtg Height}^2}{(\text{Actual Mtg Height})^2}$$

Layouts based on 3000K.
 Results are 3-5% more for 4000/5000K.
 Consult IES file for more precise calculations.

LEGEND

- 0.1 fc
- 0.2 fc
- 0.5 fc
- 1 fc
- 2 fc

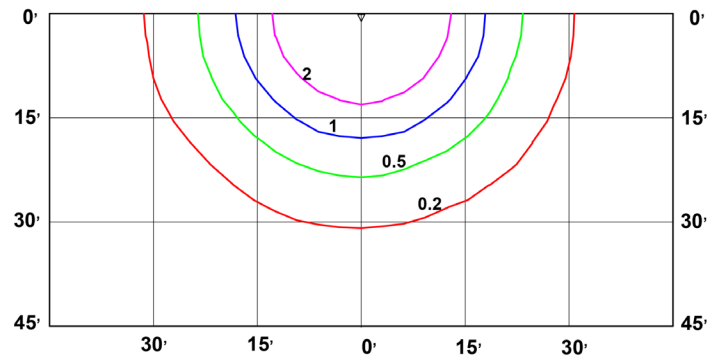

15' mtg height