

PROJECT: _____
 CATALOG #: _____
 FIXTURE TYPE: _____
 NOTES: _____

AB Bollard LED Luminaire Gen 1



PERFORMANCE INFORMATION

| SERIES NUMBER | WATT | LUMENS | CCT |
|---------------|------|--------|---------------------------------------|
| AB 30 G1 FSK | 26W | 2500 | Selectable 3000K 4000K 5000K |

The **AB Bollard LED Luminaire Gen 1** features a round flat top with 360° even light distribution that is ideal for illuminating building entryways, pathways, and pedestrian plazas, as well as applications that require a low mounting height light source with full cutoff illumination. This robust luminaire is weather resistant with a sturdy concrete base installation to provide structural support from all directions.

APPLICATIONS

Building Entryways, Pathways, Pedestrian Plazas, and any location requiring a low mounting height light source.

REPLACEMENT

50W MH

| ORDERING GUIDE | | | | | | EXAMPLE: AB 30 G1 FSK |
|----------------------------------|------------------------|------------|----------------------------|-----------------------------------|---------------------------|--|
| Luminaire Type | Lumen Output | Generation | Voltage | CCT | Finish | Options |
| AB =Bollard LED Luminaire | 30 =2500 Lumens | G1 | BLANK = 120-277V | FSK = 3000K/4000K/5000K | BLANK =Dark Bronze | BLANK =No Option EL UNV-8W = Emergency Backup Controller |

Due to continuous product improvements, specification and/or equipment updates may change without notice.

SPECIFICATIONS

HOUSING

Sealed die-cast aluminum housing

LUMINAIRE AMBIENT TEMPERATURE

Suitable for use in -40°C to 40°C (-40°F to 104°F)

EMERGENCY BATTERY AMBIENT TEMPERATURE

Suitable for use in 10°C to 40°C (50°F to 104°F)

INSTALLATION

Mounting includes concrete bollard base and anchor bolts for sturdy installation.

EFFICACY

Up to 96 lumens per watt (see individual wattage data).

CCT AND CRI

Selectable 3000K/4000K/5000K CCT available, 80 CRI.

OPTICS

Reflective cup gather light and make the coverage of the light larger Annular diffuser with 360° glow soft light around

WARRANTY

10-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

ELECTRICAL

50/60Hz operation with 120-277V input. Optional 1-10V dimming.


FINISH

Polyester Powder Coat Dark Bronze finish.

CERTIFICATIONS

UL listed for wet locations. Please visit www.slgus.com for additional certification information.

DIMENSIONS

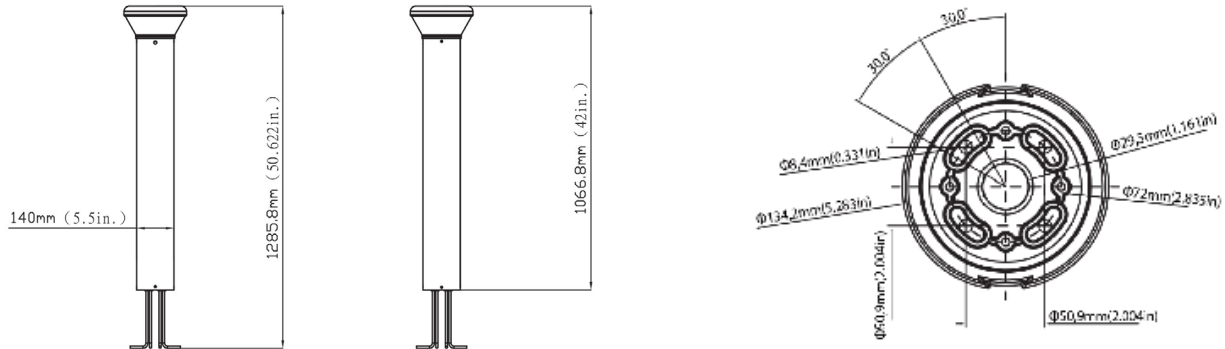

PERFORMANCE DATA

| Series Numbers | Wattage | Lumens | Efficacy | Replaces | Voltage |
|----------------|---------|--------|----------|----------|----------|
| AB 30 G1 FSK | 26W | 3000 | 115 Lm/W | 50W MH | 120-277V |

ELECTRICAL LOAD

| Number of Drivers | Driver Current (mA) | Wattage | Current (A) | | | |
|-------------------|---------------------|---------|-------------|------|------|------|
| | | | 120V | 208V | 240V | 277V |
| 1 | 670 | 26W | 0.22 | 0.13 | 0.11 | 0.09 |

Due to continuous product improvements, specification and/or equipment updates may change without notice.