



Color: Bronze

Weight: 2.0 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	34/25/13W
120V	0.30A/0.21A/0.11A	Color Temp	5000K
208V	N/A	Color Accuracy	85/86/86 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	3,907/2,827/1,493 lm
Input Watts	35.3/24.5/12.7W	Efficacy	110.7/115.4/117.6 lm/W

**Technical Specifications**

**Field Adjustability**

**Field Adjustable:**

Field Adjustable Light Output:  
34/25/13 (factory default 34W)

**Compliance**

**UL Listed:**

Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-6H8310

**Performance**

**Lifespan:**

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Wattage Equivalency:**

34W: Replaces up to 150W Metal Halide (MH) or 100W High Pressure Sodium (HPS)

25W: Replaces up to 100W Metal Halide (MH) or 100W High Pressure Sodium (HPS)

13W: Replaces up to 70W Metal Halide (MH) or 50W High Pressure Sodium (HPS)

**LED Characteristics**

**LEDs:**

Long-life, high-efficiency, surface-mount LEDs

**Color Consistency:**

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

**Construction**

**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 40°C (104°F)

**Housing:**

Precision die-cast aluminum / Polycarbonate

**Lens:**

Polycarbonate lens

**Reflector:**

Mirror finish on polycarbonate

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Installation**

**Mounting:**

Hinged wiring access and conduit entries on the back sides, top and bottom make installation a snap

**Electrical**

**Driver:**

Integrated driver, 60 Hz, 120V:

34W: 0.30A

25W: 0.21A

13W: 0.11A

**THD:**

12.48% at 120V

**Power Factor:**

99.1% at 120V

**Technical Specifications (continued)**

**Surge Protection:**  
4kV


**Optical**

**BUG Rating:**  
34W: B2 U0 G1  
25W: B1 U0 G1  
13W: B1 U0 G0

**Other**

**5 Yr Limited Warranty:**  
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Dimensions**

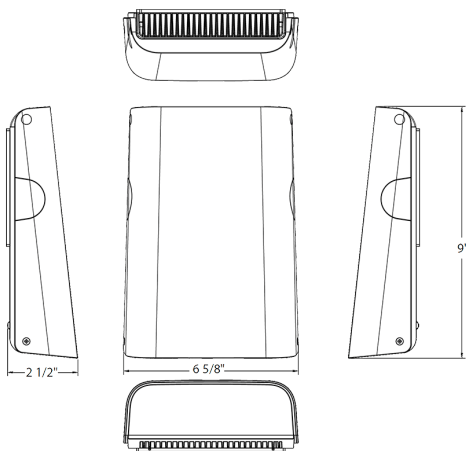

**Features**

- Selectable Wattages
- Full cutoff
- 120V
- 5-Year, limited warranty

**Ordering Matrix**

Family	Wattage	Color Temp	Finish	Driver
SLIM15				
	Blank = 34/25/13W	Blank = 5000K N = 4000K Y = 3000K	Blank = Bronze W = White	Blank = 120V