



Color: White

Weight: 3.1 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	20/25/30/35/40W
120V	0.17A/0.21A/0.25A/0.29A/0.34A	Color Temp	3500/4000/5000/5700/6500K
208V	0.09A/0.12A/0.14A/0.17A/0.19A/0.20A	Color Accuracy	83-87 CRI
240V	0.08A/0.10A/0.12A/0.14A/0.17A	L70 Lifespan	100,000 Hours
277V	0.08A/0.09A/0.11A/0.12A/0.15A	Lumens	2878-5892 lm
Input Watts	19.5-40.5W	Efficacy	140.2-147.6 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:

Constant Current, Class II, 120-277V, 50/60 Hz:
 40W: 120V: 0.35A, 208V: 0.21A, 240V: 0.18A, 277V: 0.15A
 35W: 120V: 0.29A, 208V: 0.17A, 240V: 0.15A, 277V: 0.13A
 30W: 120V: 0.25A, 208V: 0.14A, 240V: 0.13A, 277V: 0.11A
 25W: 120V: 0.21A, 208V: 0.12A, 240V: 0.10A, 277V: 0.09A
 20W: 120V: 0.16A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
 DLC Product Code: S-5R716Q (Direct Linear Ambient Luminaires)
 DLC Product Code: S-V5P1Z6 (Stairwell and Passageway Luminaires)
 DLC Product Code: S-G7WHL3 (Low-Bay Luminaires for Commercial and Industrial Buildings)

LED Characteristics

LEDs:

Long-life, high-efficiency, discrete, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Color Consistency:

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Electrical

Driver:

Constant Current, Class II, 120-277V, 50/60 Hz:
 40W: 120V: 0.35A, 208V: 0.21A, 240V: 0.18A, 277V: 0.15A
 35W: 120V: 0.29A, 208V: 0.17A, 240V: 0.15A, 277V: 0.13A
 30W: 120V: 0.25A, 208V: 0.14A, 240V: 0.13A, 277V: 0.11A
 25W: 120V: 0.21A, 208V: 0.12A, 240V: 0.10A, 277V: 0.09A
 20W: 120V: 0.16A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Aux Power Supply:

Yes

Dim to Off:

Yes

Surge Protection:

L-N 1 kV, L/N-G 2 kV

Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

Technical Specifications (continued)

Battery Backup Light Loss Factor:

40W: 25.2%
35W: 30.30%
30W: 33.5%
25W: 41.2%
20W: 51.7%

Construction

Cold Weather Starting:

The minimum starting temperature is 0°C (32°F)

Maximum Ambient Temperature w/Battery

Backup:

Suitable for use in up to 122°F (50°C)

Lens:

Polycarbonate lens

Housing:

Galvanized steel (painting)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish:

Formulated for high durability and long-lasting color

Installation

Mounting:

Surface mounting standard. V-Hooks and Chain mounting available (ordered separately, SR VHOOK KIT).

Sensor Settings

Remote Control Accessory:

Adjust settings using remote control (catalog# MSR1). Only available with 0-10V dimming driver options. [Remote control available here.](#)

Operating Voltage:

DC Input: 10.5-15V
Current>50mA

Operating Temperature:

Ta: -31° F (-35° C)* ~ +122° F(+50° C)

Sensor Warranty:

5-year sensor warranty

Sensitivity Setting:

25%/50%/75%/100%

Standby Period:

0s/10s/30s/1min/5min/10min/30min/60min/+∞

Daylight:

2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/Disable

Hold Time:

5s/30s/1min/3min/5min/10min/20min/30min

Standby Dimming:

10%/20%/30%/50%

Detection Angle:

30° to 150° without glass cover

Detection Distance:

Radius 9.84-22.96ft(3-7m)

Mounting Height:

Max 49ft.(15m)

Other


5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Accessories:

Suspended Mounting Kit: SR VHOOK KIT
Surface Mount Kit: SR JOIN KIT

Dimensions

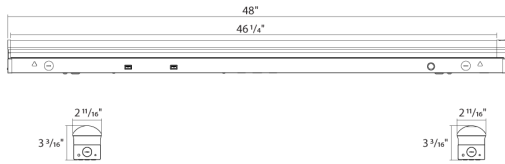

Features

- 50,000-Hour LED lifespan
- 120-277V standard
- 0-10V dimming, standard
- 5-Year, limited warranty

Ordering Matrix

Family	Size/Wattage	Mounting	Color Temp	Finish	Options
SR	4				/MVS/E
	3 = 3ft (30/26/22/18/14W) 4L = 4ft (28/24/20/16/12W) 4 = 4ft (40/35/30/25/20W) 8 = 8ft (60/52/44/36/28W) 8H = 8ft (85/75/65/55/45W) 2 = 2ft (19/15/11/7/4W)	Blank = J-Box Adaptor	Blank = 3500/4000/5000/5700/6500K CCT Adjustable	Blank = White	/LCBS/MVS/E = Lightcloud Blue MVS Sensor w/Battery Back Up /LCBS/E = Lightcloud Blue PIR Sensor w/Battery Back Up /PIR/E = Passive Infrared Occupancy Sensor w/Battery Back Up /MVS/E = Microwave Occupancy Sensor w/Battery Back Up /LCBS/MVS = Lightcloud Blue w/MVS Sensor /LCBS = Lightcloud Blue w/PIR Sensor /PIR = Passive Infrared Occupancy Sensor /MVS = Microwave Occupancy Sensor /E = Battery Back Up Blank = No Option