



STEALTH Sensor with 110° view. Double Look Down lens, surge protection, LED detection indicator and Color Matched Lens.

Color: Bronze Weight: 0.9 lbs

Project:	Type:
Prepared By:	Date:


Technical Specifications

- Compliance**
UL Listed:
Suitable for wet locations
- Electrical**
Power Consumption:
1W
Surge Protection:
Withstands up to 6000 volts
Wall Switch Manual Override:
Two flip logic prevents activation by momentary power outages. Override resets to auto at dawn. No extra wiring needed.
RF Immunity:
Circuits fully shielded for maximum radio frequency immunity
Voltage:
120V AC 60 Hertz
Switching Capacity:
1000W incandescent @ 120 volts, 8 amps
Sensor Settings
Time Adjustment:
5 seconds to 12 minutes

- Wide Sensitivity Control:**
Adjustable from 100% to 30%
Advanced Detection Logic:
Minimizes false triggers
Photoelectric Control:
Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications.
Detection:
Angle of view = 110°
Recommended Mounting Height = 10'-0"
Maximum Recommended Look-Out Zone = 50'-0"
Construction
Temperature Compensation:
Sensitivity adjusts automatically for consistent detection in hot and cold ambient temperatures
Horizontal Lock, No-tool Joints:
Keeps sensing pattern level for fast, error-free installation
Floodlights:
Precision die cast aluminum. 1/2" NPS threaded arm with serrated locking swivel fits all standard mounting boxes and covers.

- LED Characteristics**
LED Detection Indicator:
Shows when sensor is detecting in daytime and glows red at night for "on-guard" deterrence
Color Matched Lens:
Dark lens with bronze units, white lens with white units
Other
Warranty:
10-year sensor warranty

Dimensions

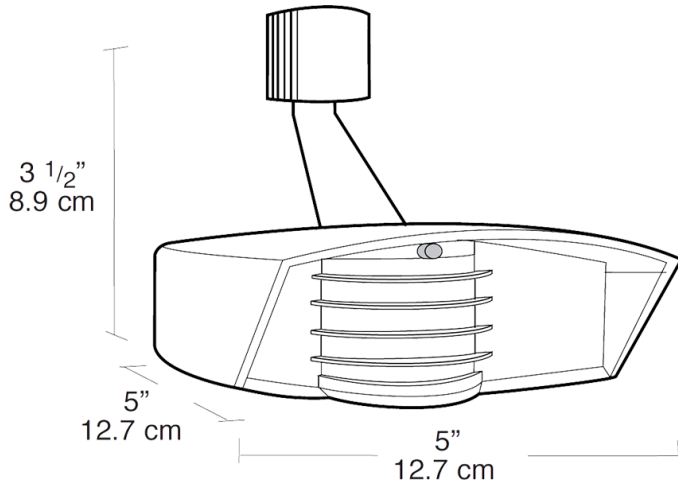

Features

- Temperature compensation
- Radio frequency immunity
- 6000 volt surge protection
- LED detection & "on guard" indicator
- Color matched vandal resistant lens and grill
- Protected manual override with auto reset
- Can be wired in parallel