


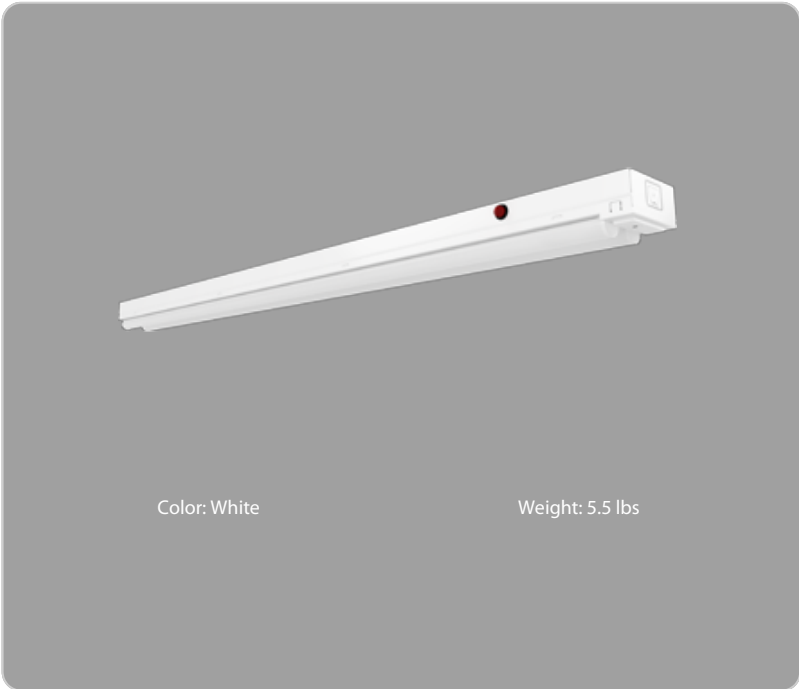

Project:	Type:
Prepared By:	Date:

Driver Info	LED Info
Type	Constant Current
120V	0.16A/0.24A/0.25A/0.32A/0.33A
208V	0.11A/0.14A/0.18A/0.19A
240V	0.09A/0.10A/0.12A/0.16A/0.17A
277V	0.08A/0.11A/0.12A/0.14A
Input	19.2-39.5W
Watts	
Watts	40/30/20W
Color Temp	3500K/4000K/5000K
Color	83-85 CRI
Accuracy	
L70 Lifespan	100,000 Hours
Lumens	3014-5958 lm
Efficacy	145.3-160.4 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
40/30/20W (factory default 20W)
Color temperature selectable by 3500/4000/5000
(factory default 4000K)

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

CCEA Compliant:

Luminaire Requirements used in Environmental Air Space per the electrical code specification of the City of Chicago

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-X0GP4X

LED Characteristics

LEDs:

Long-life, high-efficacy, discrete, surface-mount LEDs

Color Consistency:

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz:
40W: 120V: 0.333A, 208V: 0.192A, 240V: 0.167A, 277V: 0.144A
30W: 120V: 0.250A, 208V: 0.144A, 240V: 0.125A, 277V: 0.108A
20W: 120V: 0.167A, 208V: 0.096A, 240V: 0.083A, 277V: 0.072A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

9.82% at 120V, 6.68% at 277V

Power Factor:

99.3% at 120V, 95.3% at 277V

Aux Power Supply:

Yes

Dim to Off:

Yes

Surge Protection:

DM: 1 kV
CM: 2 kV

Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

Battery Backup Light Loss Factor:

40W: 10%
30W: 13.3%
20W: 20%

Technical Specifications (continued)**Construction****Cold Weather Starting:**

The minimum starting temperature is 0°C (32°F)

Maximum Ambient Temperature w/Battery**Backup:**

Suitable for use in up to 104°F (40°C)

Lens:

Polycarbonate lens

Housing:

Metal

Reflector:

Metal

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation**Mounting:**

Surface mounting standard. V-Hooks and Chain mounting available (ordered separately, SR VHOOK KIT).

Sensor Settings**Operating Voltage:**

DC Input: 10.5-15V

Current>50mA

Operating Current:

≤25mA

Output:

Dim/0-10V

Microwave Frequency:

5.8GHz±75MHz

Microwave Power:

<0.3mW

Stand-by Power:

≤0.5W

Detection Area:

25%/50%/75%/100%

Hold Time:

5s/30s/1min/3min/5min/10min/20min/30min

Daylight Threshold:

2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/Disable

Stand-by Period:

0s/10s/30s/1min/5min/10min/30min/+∞

Stand-by Dimming Level:

10%/20%/30%/50%

Operating Temperature:

-20°C~+60°C

Mounting Height:

Max 12m/39.37ft. Ceiling Mounted

Detection Range:

Max 14m/45.92 ft Ceiling Mounted

Motion Detection:

0.5~1.5m/s


Lux On-Off:

Adopted dual PD technology. GUS17-MVS is able to differentiate artificial light brightness from natural light after installed inside.

Other**5-Year Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

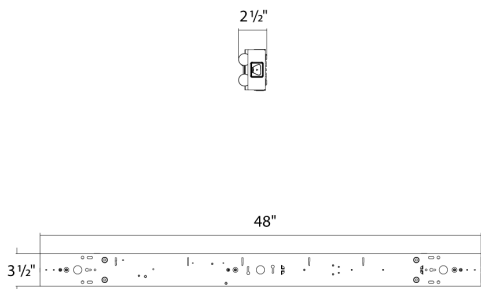

Features

- 100,000-Hour LED lifespan
- 120-277V standard
- 0-10V dimming, standard
- 5-Year, limited warranty

Ordering Matrix

Family	Size/Wattage	Color Temp	Finish	Driver	Controls	Battery Backup
STRP	4H				/MVS	/E
	2 = 2 ft, 10/8/6W 2H = 2 ft, 20/15/10W 4 = 4 ft, 20/15/10W 4H = 4 ft, 40/30/20W	Blank = 3500/4000/5000K CCT Adjustable	Blank = White	Blank = 120-277V, 0-10V Dimming	Blank = None /MVS = Microwave Occupancy Sensor /PIR = Passive Infrared Occupancy Sensor /LCBS = Lightcloud Blue w/PIR Sensor /LCBS/MVS = Lightcloud Blue w/MVS Sensor	Blank = None /E = Battery Backup ¹

¹ Only available for 4 ft models