



LBL-JB10W-5CCT-AC

5" Ultimate J-Box Mount or retrofit LED 10W 5CCT




DESCRIPTION

5" Ultimate Junction Box or Retrofit Mount LED 5CCT
With Interchangeable Magnetic Trims

FEATURES & BENEFITS

Round & Square, White & Black trims
Fits in most 4", 4/0 & 3/0 boxes minimum 1 1/2" deep
Up to 740 lm with CRI 90+ for True Color Rendering
5CCT user selectable - 2700, 3000, 3500, 4000, 5000K
60° or 38° directional light beam for reduced glare
Fire rated when used with a fire rated junction box
Wet Location certified - could be installed in soffits
Regressed look - only 1/8" visible thin trim
Triac Dimmable down to 5%
Patent Pending design

DIMENSIONS: OD 5 1/4" ; Depth 1 1/2" ; Visible Trim Thickness 1/8"

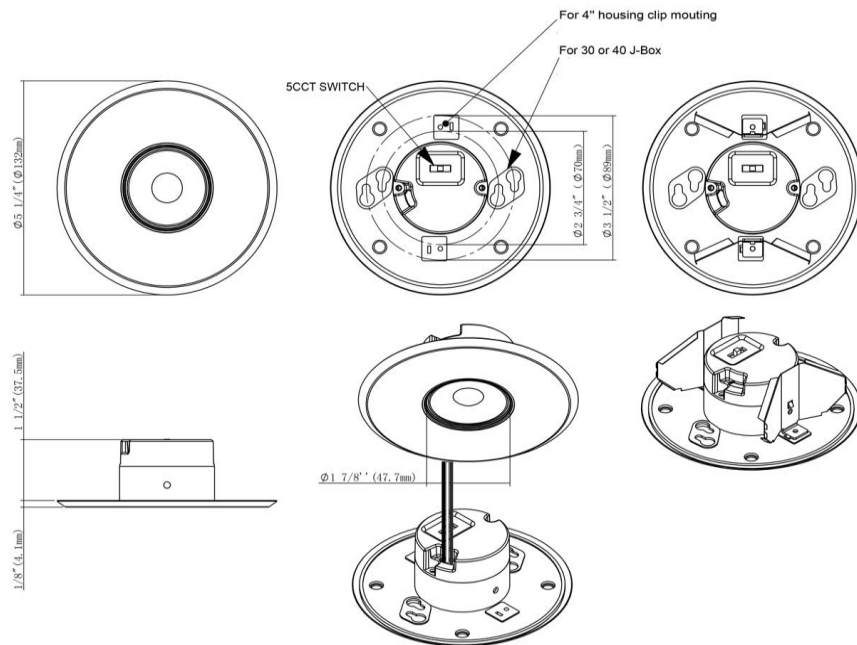

ORDERING GUIDE

LBL-JB10W-5CCT-AC-R-WH
LBL-JB10W-5CCT-AC-R-BK
LBL-JB10W-5CCT-AC-SQ-WH
LBL-JB10W-5CCT-AC-SQ-BK

Beam
leave blank for 60°
-38D for 38° beam



Trim
[Round White](#)
[Round Black](#)
[Square White](#)
[Square Black](#)



ACCESSORIES Sold Separately

Retrofit Kit with E26 Adapter and Butterfly Clips
[model # 4" Clip](#)

COMPLIANCE



Patent Pending

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6J6 tel 604-538-3090
Delta BC & Mississauga ON

Project: _____

Location: _____

Model: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Multi Family & Residential Applications
Energy Used	10 W
Color Temperature (K)	5CCT: 2700K - 3000K - 3500K - 4000K - 5000K
Light Output (lm)	600 - 650 - 715 - 740 - 730
Halogen Equivalent	75 W
Beam Angle	60° (standard), 38° (optional)
CRI	90 +
Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 5% - 100%
Approved Location	Wet Locations
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Warranty	5 Year

Available Trims

