




DESCRIPTION

Mono point multi directional floating bullet gimbal LED
Use as a straight down or adjustable fixture

FEATURES & BENEFITS

Track light effect without tracks needed
Adjustable up to 30° Tilt, choice of 38° & 24° beams
5 CCT Switchable 2700K to 5000K
CRI 90+ for true color rendering
Driver Inside Connection Box - No Junction Box Needed
Type IC, Wet Location & Air-Tight rated
White & Black trims in stock
Ideal for sloped ceilings, soffits, wall washing,
highlighting artwork, task and general lighting

INSTALLATION INSTRUCTIONS

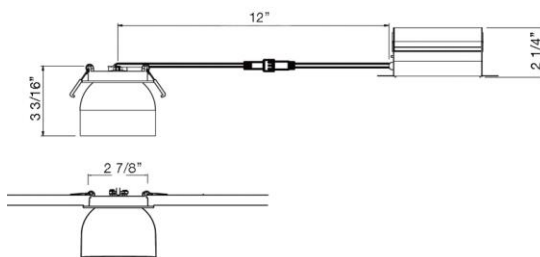

ORDERING GUIDE

	CCT	Trim	Beam
AD-3-S14W-AR-5CCT-WH-38D	5CCT	White	38°
AD-3-S14W-AR-5CCT-WH-24D	5CCT	White	24°
AD-3-S14W-AR-5CCT-BK-38D	5CCT	Black	38°
AD-3-S14W-AR-5CCT-BK-24D	5CCT	Black	24°

AD-3-S14W-AR

3" Bullet Floating Gimbal LED 14W

Project:

Location:

Model:

Qty:

Notes:

SPECIFICATION					
Applications	accent lighting, sloped ceilings, wall washing, artwork				
Energy Used	15 W				
Color Temperature (K)	2700	3000	3500	4000	5000
Light Output with 38° (lm)	1095	1143	1244	1345	1347
Light Output with 24° (lm)	1091	1155	1253	1328	1365
Beam Angle	38° & 24°				
Tilt Angle	30°				
CRI	90+				
Default Driver	120V AC Triac Dimmable				
Optional Driver	120-347V AC 0-10V Dimmable				
Junction Box Volume	6.53 in3 / 2 in 2 out 12AWG				
Approved Location	Wet Locations				
Air Tight & Type IC	Yes				
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)				
Projected Life	70% Light Output at 50,000 Hours				
Certification	cETLus				
Warranty	3 Year				

Trim Options



White



Black



ACCESSORIES

Sold Separately



[Jumper Cable 10 ft. 5 CCT Model # JC-5CCT-10](#)



0-10V Dimmable driver 120-347V
[for 5CCT model HBL015-AW-10-01A-5CS](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON