

Type IC, Wet Location & Air-Tight

# AD-LED-4-S12W-xx-xx-LREY

## 4" Round Venus Adjustable Recessed LED 12W

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_


**DESCRIPTION**

4" Round Recessed Gimbal LED fixture  
 Regressed optics with low glare  
 Adjustable 20° each direction and with 360° rotation

**FEATURES & BENEFITS**

**3 light options** - 3000K, 5CCT selectable, Dim to Warm 3000K-1800K  
**CRI 90+** for true color rendering  
**2 1/4" Deep** - fits in limited ceiling space  
**Type IC Rated** - no housing required  
**Fast & Easy** to install - save on labor  
**Driver Inside Connection Box** - no junction box needed

**DIMENSIONS** ID 4" OD 5" Cut Out 4 1/4" to 4 1/2"

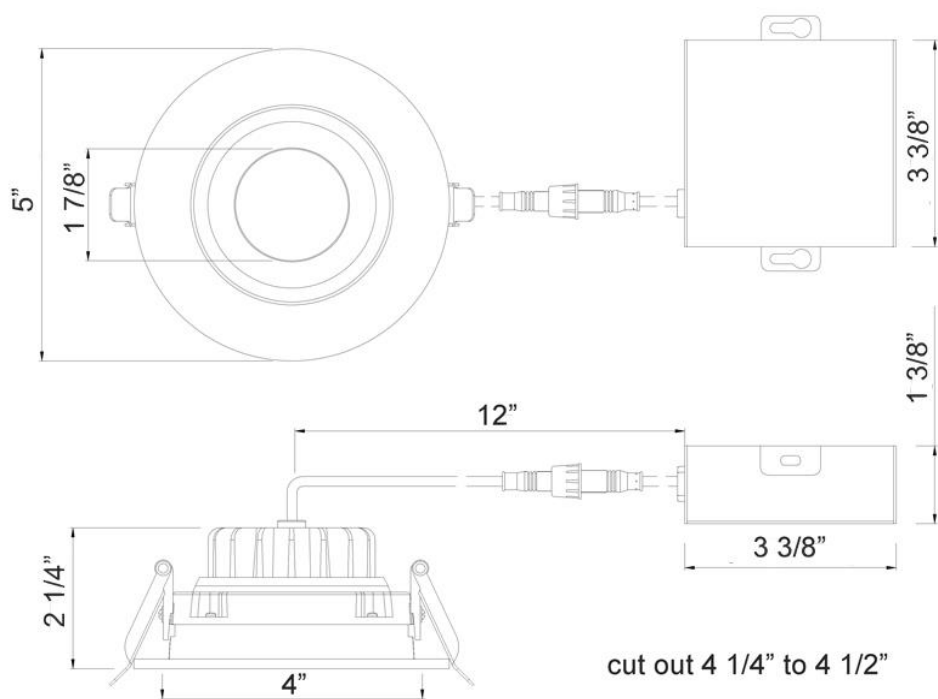

SPECIFICATION	
Applications	Commercial & Residential Recessed
Power	12 W
Color Temperature (K)	3000   5CCT 27K-30K-35K-40K-50K   Dim to Warm 30-18K
Light Output (lm)	880   780-820-890-920-910   700
Halogen Equivalent	90 W
Beam Angle	38° wide beam with 20° tilt and 360° rotation
CRI	90 +
Default Driver Input & Dimming	120V AC 50/60 Hz - Triac Dimmable
Optional Driver Input & Dimming	120V-347V AC 50/60 Hz - 0-10V Dimmable
Approved Location	Insulated Ceiling & Wet Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, T24
Warranty	5 Year

**Trim Options**



White



Black



Brushed Nickel

**ACCESSORIES**

Sold Separately



[26" Long Flat Rough-In Plate model # RIP414](#)



[13" Long Flat Rough-In Plate model # MP4-2](#)



[13" Long Flanged Rough-In Plate model # MP4](#)



[4 1/8" Hole Flanged with Hanger Bars model # FRP4](#)



[Jumper Cable 10 ft model # JC-10](#)



[White model # GR4 Black model # GR4-BK](#)




[0-10V Driver 120-347V model # HBL012-AW-10-01L](#)

**ORDERING GUIDE**

Model	CCT	Trim
AD-LED-4-S12W-3K-WH-LREY	3000K	<a href="#">White</a>
AD-LED-4-S12W-5CCT-WH-LREY	5CCT selectable	<a href="#">White</a>
AD-LED-4-S12W-5CCT-BK-LREY	5CCT selectable	<a href="#">Black</a>
AD-LED-4-S12W-5CCT-BN-LREY	5CCT selectable	<a href="#">Brushed Nickel</a>
AD-LED-4-S12W-DTW-WH-LREY	Dim to Warm 3018K	<a href="#">White</a>
AD-LED-4-S12W-DTW-BK-LREY	Dim to Warm 3018K	<a href="#">Black</a>
AD-LED-4-S12W-DTW-BN-LREY	Dim to Warm 3018K	<a href="#">Brushed Nickel</a>

**COMPLIANCE**



Type IC  
Air-Tight

Lotus LED Lights USA  
 250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
 Hainesport NJ, Naples FL, Vancouver WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)

mailing addresses  
 warehouses

Lotus LED Lights CANADA  
 1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090  
 Delta BC & Mississauga ON