


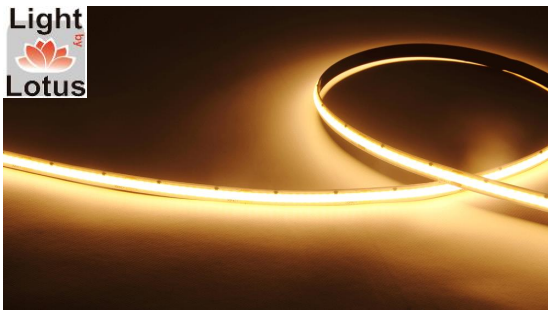


DESCRIPTION

High Quality COB LED flexible strip 24V DC for dry locations
Seamless linear light - no diffused cover needed
No hotspots and with CRI 90+ for vibrant colors
Reinforced design for stable performance when bending & twisting
3 oz copper PCB and real gold wires for superb light maintenance
Wires on both ends, options of 16ft and 100 ft reels
Double sided adhesive 3M tape

INSTALLATION INSTRUCTIONS

1. Remove backing plastic to reveal adhesive tape
2. Press LED tape firmly onto clean smooth surface that adsorbs heat, such as metal or glass. Start at one end and gradually move along surface, making sure tape is smooth and not creased
3. Minimum Bending Radius 2"
4. Cut on trim marks every 2"

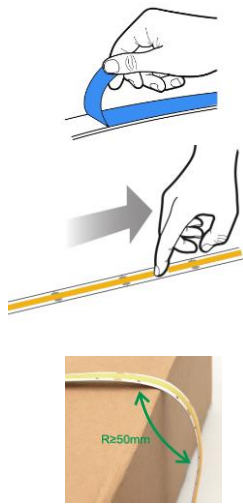

WARNING

LED tape gets hot. Mounting firmly and securely on smooth and thermo conductive surface such as metal or glass is critical for proper thermal management and long life. Not following these instructions voids the warranty

ORDERING GUIDE

example: **ES-FSCOBWW-24-IP20-30K-16FT**

	- CCT (K)	- Length
ES-FSCOBWW-24-IP20	-27K	-16FT
	-30K	-100FT
	-40K	
	-50K	

In stock 16 ft and 100 ft reels

ES-FSCOBWW-24-IP20

COB LED Tape Light 24V 3W/ft 8mm CRI90+ IP20

Project:

Location:

Model # :

Qty:

Notes:

SPECIFICATION	
Applications	Undercabinet, Cove, Valance, Decorative
Power	3 W/ft
Input	24V DC
Stock CCTs	2700 K 3000 K 4000 K 5000 K
Light output per foot	270 lm 285 lm 312 lm 312 lm
Efficiency	90 lm/W 95 lm/W 104 lm/W 104 lm/W
CRI	90 +
Available Lengths	16 ft or 100 ft roll
Maximum Connection Length	16 ft (5 m)
Width	5/16" (8 mm)
Beam Angle	135°
Dimmable	Yes
LED Operation Type	Constant Voltage
IP Grade	IP 20
Approved Location	Dry Location
Operating Temperature	-13°F (-25°C) to +113°F (+45°C)
Cuttable Increment	2" (50 mm)
Minimum Bending Radius	2" (50 mm)
LEDs type	COB
Adhesive Tape Type	3M 300SE
Projected Life	70% Light Output at 50,000 Hours
Certification	c UL us
Warranty	5 year indoor / 3 year outdoor - when installed with a Lotus LED Lights driver
	The warranty is void if installed with an LED driver from another manufacturer

ACCESSORIES

Sold Separately



Strip Connector 8mm no wires model # **LCS-0-8MM**

Single Connector with 6" wire model # **LCS-1-8MM**

Two Connectors with 6" wire model # **LCS-2-8MM**

[Tape to Wire Straight Screw Connector # SC-8-10-TW](#)

[Tape to Tape Straight Screw Connector # SC-8-10-TT-1](#)

[Tape to Tape 90° L-shape Screw Connector # SC-8-10-TT-9](#)

Note: All connectors fit inside the channel

RECOMMENDED DRIVERS

[KVG-24030-DWJ](#)

[KVG-24060-DWJ](#)

[KVG-24096-DWJ](#)

[KVG-C24192-DWJ](#)

[KVG-C24288-DWJ](#)

[SDD-24060-DIM](#)

[SDD-24096-DIM](#)



30W 5-in-1 Dimmable

60W 5-in-1 Dimmable

96W 5-in-1 Dimmable

192W 5-in-1 Dimmable

288W 5-in-1 Dimmable

60W 2-in-1 driver + dimmer

96W 2-in-1 driver + dimmer

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500

Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses

warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090

Delta BC & Mississauga ON