



Project: _____

Location: _____

Qty: _____

Notes: _____

DESCRIPTION

24V 288W class 2 power supply with built-in wiring compartments for line and low voltage connections

5-in-1 forward and reverse phase dimming:
TRIAC / ELV / MLV, 0-10V, 1-10V, Potentiometer, 10V PWM

FEATURES & BENEFITS


High quality electronic LED driver with superior dimming compatibility

Active Power Factor Correction (PFC) & Pulse Width Modulation (PWM) dimming ensures excellent compatibility with most dimmers

Multiple knock-outs for easy wiring


0.5 second start time

DIMENSIONS

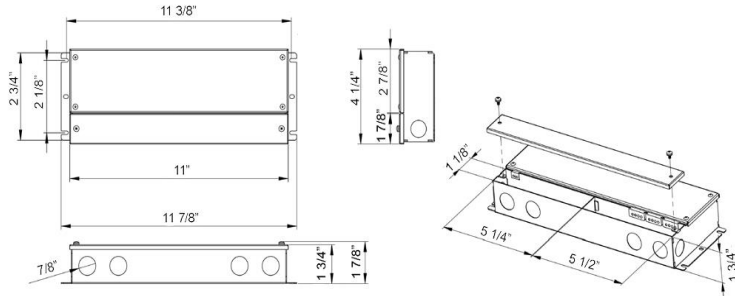


| SPECIFICATION | |
|------------------------------|--|
| Applications | LED Tape, 24V Ceiling Fixtures |
| Power | 3 x 96 W |
| Input | 120V - 277 V AC |
| Output V / A | 24V DC 3 x 4 A |
| Type | Constant Voltage Electronic LED Driver |
| Dimmability | TRIAC, 0-10V, 1-10V, Pot., 10V PWM |
| Min / Max Load: | 2 x 9W / 2 x 96W |
| THD @ 120V with 80% LED load | without dimmer: 16% |
| | with triac dimmer: 25% |
| | with 0-10V dimmer: 17% |
| THD @ 277V with 80% LED load | without dimmer: 15% |
| | with triac dimmer: 33% |
| | with 0-10V dimmer: 16% |
| Power Factor | 0.98 with built-in power factor correction |
| PWM Frequency | 20 KHz |
| Protection | short circuit, over-voltage, over-heat, over-load |
| Approved Location | Dry, Damp & Wet Locations |
| Wiring Volume | 11 cu in per chamber |
| Ambient Temperature | -40°F (-40°C) to +140°F (+60°C) |
| Warranty | 5 Year |
| Certification | c UL us Listed, Class 2, Type HL, FCC Title 47 Class B |

Wiring Diagram

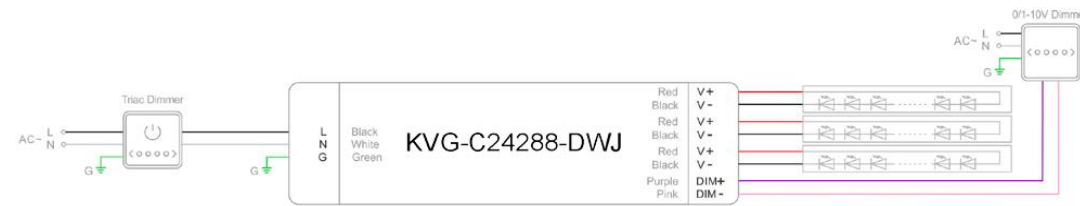

Derating Curve - load accordingly

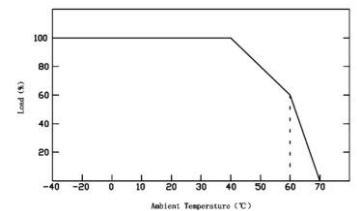

ORDERING GUIDE **KVG-C24288-DWJ**

WARNING:

Do not exceed ambient temperature range from -40°F (-40°C) to +140°F (+60°C). Please mount in a shaded area or when mounted indoors install in a well-ventilated area. Failure to follow these instructions could lead to overheating, short life and void the warranty.