



LBL-DC24V96W

24V Dimmable Class 2 Power Supply 96W

Project:

Location:

Qty:

Notes:

DESCRIPTION


24V Class 2 Power Supply 96W
For Residential Applications at 80% Load

FEATURES & BENEFITS

- 1 1/4" Hight - Fits Where Space Is Limited
- Triac and 0-10V Dimmable
- Wet Location Certified


WIRING DIAGRAM

The below diagram shows both Triac and 0-10V options and if for information purpose only.
Always use the wiring diagram of dimmer manufacturer.
Do not connect other light fixtures in the same circuit.

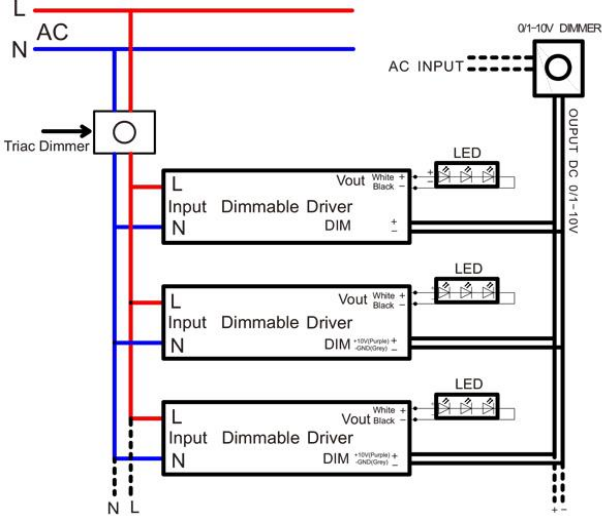

SPECIFICATION	
Applications	LED Tape, 24V Ceiling Fixtures
Power	96 W
Input	120V
Output	24V DC
Dimmability	Triac & 0-10V down to 20%
Approved Location	Wet Location IP67
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Warranty	3 Year
Certification	cULus Listed File # 498189

DIMENSIONS: 9 3/8" x 2 1/4" x 1 1/4"

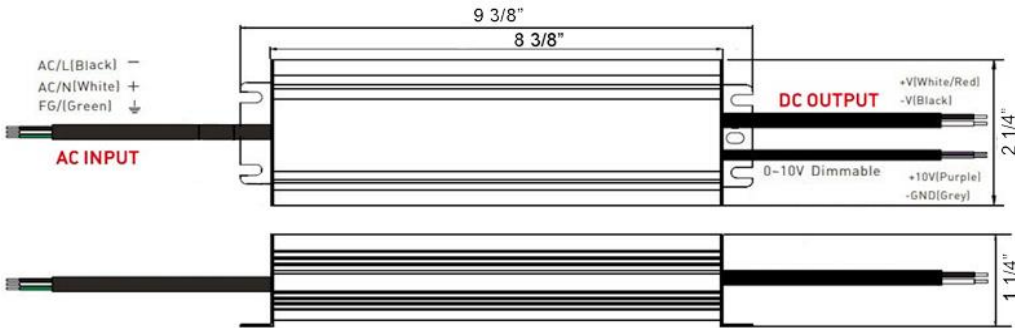

ORDERING GUIDE

Hard Wired	LBL-DC24V96W	
Plug-in	LBL-DC24V96W-PLUG	

COMPLIANCE



WARNING:

Ambient operating temperature is -40°F (-40°C) to +104°F (+40°C). Please mount in a shaded area or when mounted indoors install in a well-ventilated area. Failure to follow these instructions could lead to overheating, short life and void the warranty.

Lotus LED Lights USA 250 H Street # 301, Blaine WA 98230 tel 360-200-5500 Hainesport NJ, Naples FL, Vancouver WA	www.LotusLEDLights.com mailing addresses warehouses	Lotus LED Lights CANADA 1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090 Delta BC & Mississauga ON
---	---	---