



Lotus
LED
Lights



Type IC, Wet, Air-Tight & Open Plenum

DESCRIPTION

5" Round 30° Sloped Deep Regressed LED
Commercial Grade Quality Built To Last



FEATURES & BENEFITS

30° Sloped - perfect for 30° sloped ceilings and wall washing
5 single CCT + Dim to Warm + 5CCT field selectable options
Type IC, Air-Tight & Wet - No Housing Required
3 1/2" Deep - Install Where Ceiling Space Is Limited
Armored Cable & Metal Connectors - Open Plenum Rated
Driver Inside Connection Box with Romex Quick Connectors
and Knock Outs - Fast Installation & No Junction Box Needed

DIMENSIONS ID 4 1/4" OD 6 1/4"

Ceiling Clearance Required: 3 1/4"

CUT OUT 5" to 5 1/2"

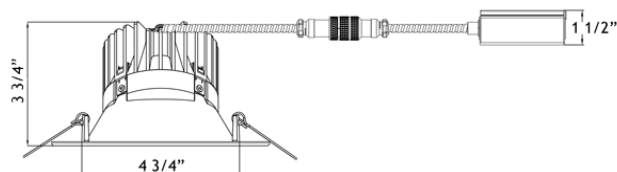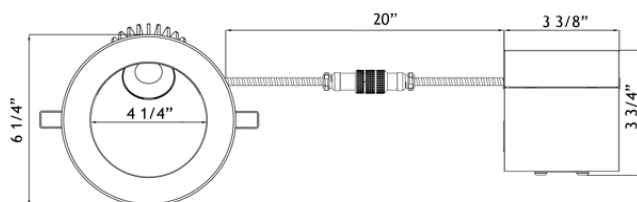

120V TRIAC Dimmable Driver Included

Optional 120V-347V

0-10V Dimmable

Order Separately as

[model # LLL-LD1535TR](#)



ORDERING GUIDE Example **LD4R-30K-5R-SL30-WH**

	CCT	Reflector - Trim	Beam Angle
LD4R	- xxK	- 5R-SL30-WH	
2700K	27K	- 5R-SL30-BK	blank for 30°
3000K	30K	- 5R-SL30-ORB	-15D 15°
3500K	35K		-60D 60°
4000K	40K		
5000K	50K		
DTW 30-20K	32K	Dim To Warm 3000K to 2000K	
DTW 30-18K	3018K	Dim To Warm 3000K to 1800K	
5CCT	5CCT	User selectable 27-30-35-40-50K	



Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

LD4R-5R-SL30

5" Round 30° Sloped Regressed LED Plenum Rated 15W

Project:

Location:

Model #:

Qty:

Notes:

SPECIFICATION	
Applications	Recessed Sloped Ceilings and Wall Washing
Power	15W
Color Temperature CCT (K)	2700 3000 3500 4000 5000 DTW 30-20K DTW 30-18K
Light Output Single CCT (lm)	1380 1430 1400 1500 1460 1130 1300
Light Output 5CCT (lm)	1170 1240 1350 1400 1420
Beam Angle	30° (default), 15° & 60° optional
Slope Angle	30°
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceilings, Open Plenum, Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS



5R-SL30-WH
White



5R-SL30-BK
Black



5R-SL30-ORB
Oil Rubbed Bronze

ACCESSORIES

Sold Separately



[Armored Low Voltage Extension 10ft model **MEC10**](#)



[26" Long Flat Plate 5" Hole model # **RIP5**](#)



[5" Hole Flanged with Hanger Bars model # **FRP5**](#)



[Emergency Driver 8W 120-347V input model # **BLD-HM08D-YYY**](#)

COMPLIANCE



Type IC & Air-Tight
Wet Location & Open Plenum

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON