



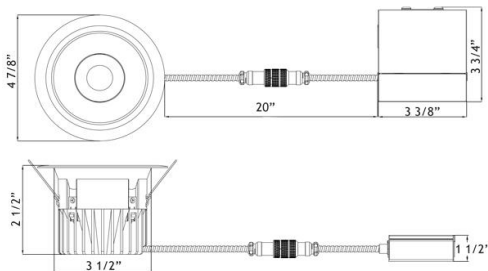
Type IC, Wet, Air-Tight & Open Plenum

DESCRIPTION

4" Round Deep Regressed LED - Elegant Design Without Glare
Corrosion Resistant Polycarbonate Trim, White & Black in stock

FEATURES & BENEFITS

Rust Free - suitable for ocean front soffits, saunas & steam showers
5 single CCT, Dim to Warm, & 5CCT field selectable options
3 1/2" Deep - Install Where Ceiling Space Is Limited
Armored Cable & Metal Connectors - Open Plenum Rated
Driver Inside Connection Box with Romex Quick Connectors
and Knock Outs - Fast Installation & No Junction Box Needed
Type IC, Air-Tight & Wet Location - No Housing Required

DIMENSIONS ID 4" OD 4 7/8" Cut Out 4 1/4"

120V TRIAC Dimmable Driver Included

Optional 120V-347V

0-10V Dimmable Driver

Order Separately as

[model # LLL-LD1535TR](#)**ORDERING GUIDE** Example **LD4R-30K-4R-CPL-WH**

	CCT	Trim	Beam Angle	
LD4R	- xxK	- 4R-CPL-WH	blank for 30°	
2700K	27K	- 4R-CPL-BK	-15D	15°
3000K	30K		-60D	60°
3500K	35K			
4000K	40K			
5000K	50K			
DTW 30-20K	32K	Dim To Warm 3000K to 2000K		
DTW 30-18K	3018K	Dim To Warm 3000K to 1800K		
5CCT	5CCT	User selectable 27-30-35-40-50K		

**Lotus LED Lights USA**

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

LD4R-CPL**4" Round Deep Regressed Corrosion Resistant LED 15W**

Project:

Location:

Model #:

Qty:

Notes:

SPECIFICATION	
Applications	Ocean Front Soffits, Saunas & Steam Showers
Power	15W
Color Temperature CCT (K)	2700 3000 3500 4000 5000 DTW 30-20K DTW 30-18K
Light Output Single CCT (lm)	1380 1430 1400 1500 1460 1130 1300
Light Output 5CCT (lm)	1170 1240 1350 1400 1420
Beam Angle	30° (default), 15° & 60° optional
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceilings, Open Plenum, Wet Locations
IP Rating	IP 54
Air Tight	Yes
Heat Sink Material	Aluminum Alloy
Trim Material	80% Polyamide PA66 & 20% Fiberglass 20GF
Trim Color	White or Black
Fixture Work Temperature	-40°F (-40°C) to +104°F (+40°C)
Trim Ambient Temperature	maximum +400°F (+205°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS

ACCESSORIES

Sold Separately

[26" Long Flat Rough-In Plate model # RIP414](#)[13" Long Flat Rough-In Plate model # MP4-2](#)[13" Long Flanged Rough-In Plate model # MP4](#)[4 1/8" Hole Flanged with Hanger Bars model # FRP4](#)[Armored Low Voltage Extension 10ft model # MEC10](#)[Goof Ring 5 3/4" White model # GR4 Black model # GR4-BK](#)**COMPLIANCE**

Type IC & Air-Tight
Wet Location & Open Plenum

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON