



**Type IC, Wet, Air-Tight & Open Plenum**


**DESCRIPTION**

4" Round Deep Regressed LED - Elegant Design Without Glare  
Corrosion Resistant Polycarbonate Trim, White & Black in stock

**FEATURES & BENEFITS**

- Rust Free - suitable for ocean front soffits, saunas & steam showers
- 5 single CCT, Dim to Warm, & 5CCT field selectable options
- 3 1/2" Deep - Install Where Ceiling Space Is Limited
- Armored Cable & Metal Connectors - Open Plenum Rated
- Driver Inside Connection Box with Romex Quick Connectors and Knock Outs - Fast Installation & No Junction Box Needed
- Type IC, Air-Tight & Wet Location - No Housing Required

**DIMENSIONS ID 4" OD 4 7/8" Cut Out 4 1/4"**

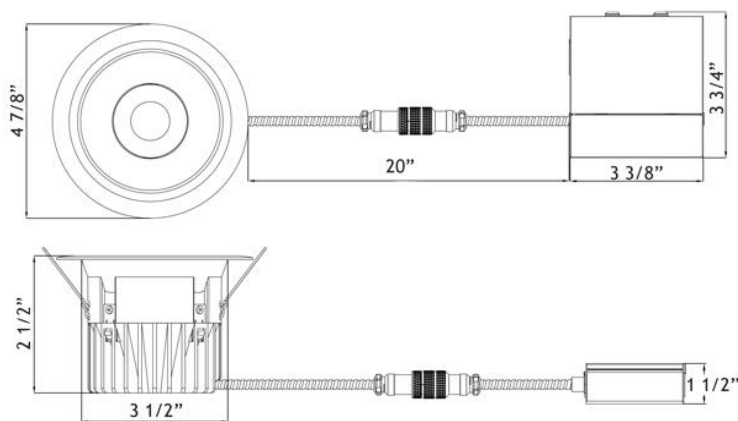

120V TRIAC Dimmable Driver Included      Optional 120V-347V

0-10V Dimmable Driver

Order Separately as

[model # LLL-LD1535TR](#)



**ORDERING GUIDE Example LD4R-30K-4R-CPL-WH**

	CCT	Trim	Beam Angle	
<b>LD4R</b>	- xxK	- 4R-CPL-WH	blank for 30°	
2700K	<b>27K</b>	- 4R-CPL-BK	-15D	15°
3000K	<b>30K</b>		-60D	60°
3500K	<b>35K</b>			
4000K	<b>40K</b>			
5000K	<b>50K</b>			
DTW 30-20K	<b>32K</b>	Dim To Warm 3000K to 2000K		
DTW 30-18K	<b>3018K</b>	Dim To Warm 3000K to 1800K		
5CCT	<b>5CCT</b>	User selectable 27-30-35-40-50K		



# LD4R-CPL

## 4" Round Deep Regressed Corrosion Resistant LED 15W

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Ocean Front Soffits, Saunas & Steam Showers
Energy Used	15W
Color Temperature (K)	2700   3000   3500   4000   5000   DTW 30-20K   DTW 30-18K
Light Output (lm)	1100   1200   1250   1300   1400   900   980
Beam Angle	30° (default), 15° & 60° optional
CRI	90 +
Default Driver Input	120V AC      Triac Dimmable
Optional Driver Input	120V-347V AC      0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.98
Approved Location	Insulated Ceilings, Open Plenum, Wet Locations
IP Rating	IP 54
Air Tight	Yes
Heat Sink Material	Aluminum Alloy
Trim Material	80% Polyamide PA66 + 20% Fiberglass 20GF
Trim Color	White or Black
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW & 5CCT), T24
Warranty	10 Year Residential / 5 Year Commercial

**AVAILABLE TRIMS**



ACCESSORIES

Sold Separately

- [26" Long Flat Rough-In Plate model # RIP4](#)
- [13" Long Flat Rough-In Plate model # MP4-2](#)
- [13" Long Flanged Rough-In Plate model # MP4](#)
- [4 1/8" Hole Flanged with Hanger Bars model # FRP4](#)
- [Armored Low Voltage Extension 10ft model # MEC10](#)
- [Goof Ring 5 3/4" White model # GR4 Black model # GR4-BK](#)

**COMPLIANCE**



**Type IC & Air-Tight  
Wet Location & Open Plenum**

**Lotus LED Lights USA**  
250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
Hainesport NJ, Naples FL, Vancouver WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)

mailing addresses  
warehouses

**Lotus LED Lights CANADA**  
1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090  
Delta BC & Mississauga ON