



LD4R-IT

4" Trimless Round Deep Regressed LED 15W



Type IC, Wet, Air-Tight & Open Plenum

DESCRIPTION


4" Round Deep Regressed LED with Invisible Trim
Commercial Grade Quality Built To Last

FEATURES & BENEFITS

5 single CCT, Dim to Warm, & 5CCT field selectable options
3 1/2" Deep - Install Where Ceiling Space Is Limited
Armored Cable & Metal Connectors - Open Plenum Rated
Driver Inside Connection Box with Romex Quick Connectors
and Knock Outs - Fast Installation & No Junction Box Needed
Type IC, Air-Tight & Wet Location - No Housing Required

DIMENSIONS ID 4" OD 4 7/16"

Ceiling Clearance Required: 3 CUT OUT 4 1/2"

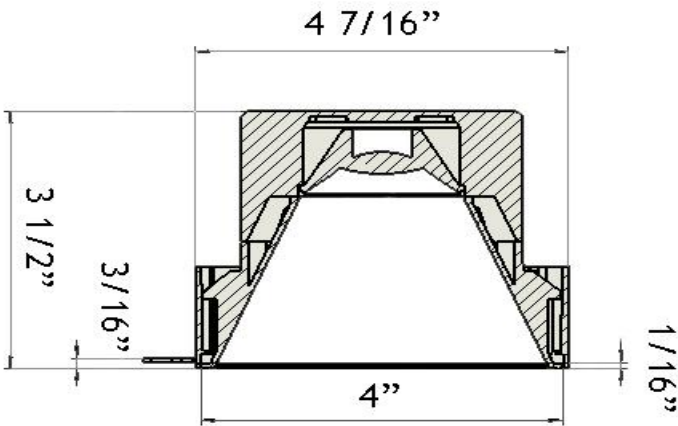

ORDERING GUIDE Example LD4R-30K-4R-WR-IT

	CCT	Reflector - Trim	Beam Angle
LD4R	- xxK	- 4R-xR-IT	
2700K	27K	- 4R-WR-IT	blank for 30°
3000K	30K	- 4R-SR-IT	-15D 15°
3500K	35K	- 4R-BR-IT	-60D 60°
4000K	40K		
5000K	50K		
DTW 30-20K	32K	Dim To Warm 3000K to 2000K	
DTW 30-18K	3018K	Dim To Warm 3000K to 1800K	
5CCT	5CCT	User selectable 27-30-35-40-50K	



Project: _____

Location: _____

Model #: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Recessed Ceiling Mount Trimless
Power	15W
Color Temperature CCT (K)	2700 3000 3500 4000 5000 DTW 30-20K DTW 30-18K
Light Output Single CCT (lm)	1380 1430 1400 1500 1460 1130 1300
Light Output 5CCT (lm)	1170 1240 1350 1400 1420
Beam Angle	30° (default), 15° & 60° optional
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceilings, Open Plenum, Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS



White Reflector
4R-WR-IT



Silver Reflector
4R-SR-IT



Black Reflector
4R-BR-IT

120V TRIAC Dimmable Driver Included

Optional 120V-347V



0-10V Dimmable

Order Separately as

[model # LLL-LD1535TR](#)

ACCESSORIES

Sold Separately



[4 1/8" Hole Flanged with Hanger Bars model # FRP412](#)

[Armored Low Voltage Extension 10ft model # MEC10](#)

COMPLIANCE



Type IC & Air-Tight

Wet Location

Open Plenum

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON