Interactive spec sheet with links to larger images and spec sheets of accessories

Lotus LED Lights



Type IC, Wet, Air-Tight & Open Plenum

LD4R-TT

4" Thin Trim Round Deep Regressed LED 15W

Project:

Location:

Model #: Qty:

Notes:

SPECIFICATION	
Applications	Recessed Ceiling Mount Thin Trim
Power	15W
Color Temperature CCT (K)	2700 | 3000 | 3500 | 4000 | 5000 | DTW 30-20K | DTW 30-18K
Light Output Single CCT (lm)	1380 | 1430 | 1400 | 1500 | 1460 | 1130 | 1300
Light Output 5CCT (lm)	1170 | 1240 | 1350 | 1400 | 1420
Beam Angle	30° (default), 15° & 60° optional
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceilings, Open Plenum, Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

DESCRIPTION

4" Round Deep Regressed LED

3/8" Trim for High-End Contemporary Installations

Commercial Grade Quality Built To Last

FEATURES & BENEFITS

5 single CCT, Dim to Warm, & 5CCT field selectable options

3 1/2" Deep - Install Where Ceiling Space Is Limited


Armored Cable & Metal Connectors - Open Plenum Rated

Driver Inside Connection Box with Romex Quick Connectors and Knock Outs - Fast Installation & No Junction Box Needed

Type IC, Air-Tight & Wet Location - No Housing Required

DIMENSIONS ID 3 3/4" OD 4 1/8"

Ceiling Clearance Required: 3 1/2" Cut Out 3 3/4"

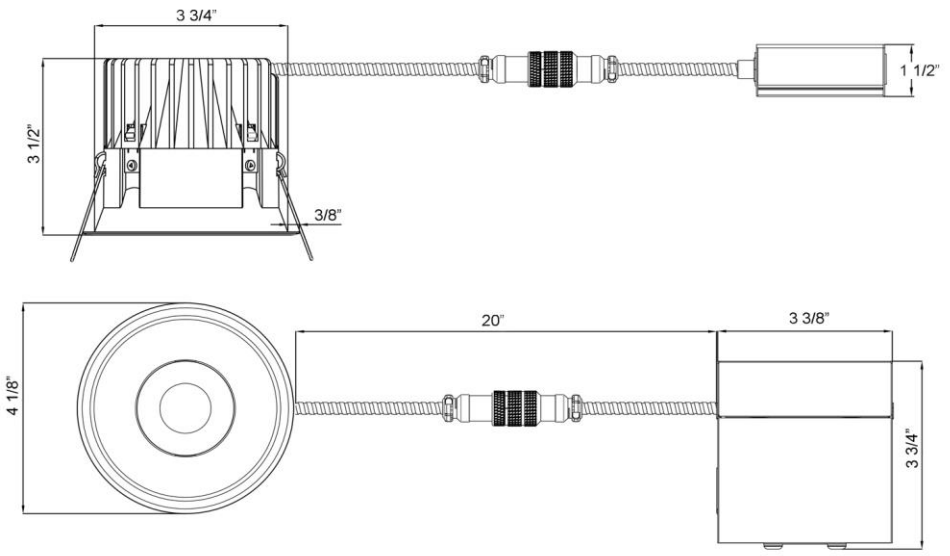

AVAILABLE TRIMS



White **R**eflector
White Trim
4R-WR-TT



Silver **R**eflector
White Trim
4R-SR-TT



Black **R**eflector
Black Trim
4R-BR-TT

120V TRIAC Dimmable Driver Included Optional 120V-347V 0-10V Dimmable



Order Separately as
model # **LLL-LD1535TR**

ORDERING GUIDE Example **LD4R-30K-4R-WR-TT**

	CCT	Reflector - Trim	Beam Angle	
LD4R	**- xxK**	**- 4R-xR-TT**		
2700K	**27K**	**- 4R-WR-TT**	ank for 30°	
3000K	**30K**	**- 4R-SR-TT**	**-15D**	15°
3500K	**35K**	**- 4R-BR-TT**	**-60D**	60°
4000K	**40K**			
5000K	**50K**			
DTW 30-20K	**32K**	Dim To Warm 3000K to 2000K		
DTW 30-18K	**3018K**	Dim To Warm 3000K to 1800K		
5CCT	**5CCT**	User selectable 27-30-35-40-50K		

ACCESSORIES Sold Separately



26" Long Flat Rough-In Plate model # **RIP334**



Armored Low Voltage Extension 10ft model # **MEC10**

COMPLIANCE

c UL us LISTED E479890

TITLE 24 COMPLIANT

WET LOCATION

Type IC & Air-Tight
Wet Location
Open Plenum

Lotus LED Lights USA
250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com
mailing addresses
warehouses

Lotus LED Lights CANADA
1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON