



LE4SR

4" Square Deep Regressed Eco LED 11W



Project: _____

Location: _____

Model #: _____ Qty: _____

Notes: _____

DESCRIPTION

4" Square Deep Regressed LED With Integral Driver In Connection Box
Builder Grade Fixture Providing Pleasant Low Glare Light


FEATURES & BENEFITS

- 1 1/8" Regressed for Reduced Glare
- 5CCT User Selectable 2700-3000-3500-4000-5000K in WH & BK trims
- Dim To Warm 3000K to 2000K in WH trim in stock
- Up to 1030 lm with CRI 90+ [Spectrum WH](#) [Spectrum BK](#)
- Driver Inside Connection Box - No Junction Box Needed
- Type IC, Air-Tight and Wet Location Rated - No Housing Needed

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required 2"

DIMENSIONS: ID 4 1/8" OD Square 4 5/8" Cut Out 4 1/8" to 4 1/4"

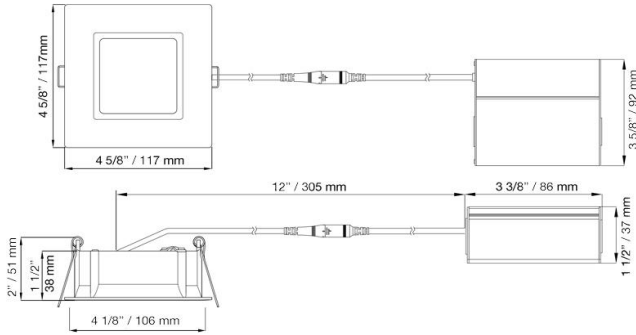

120V TRIAC Dimmable

Driver Included



Optional 120V - 347V

Driver 0-10V Dimmable

Order Separately as [model # LLL-LD1535ET](#)

AVAILABLE TRIMS



White



Black

ORDERING GUIDE

LE4SR-5CCT-WH
LE4SR-5CCT-BK

CCT
5 CCT
5 CCT

Trim
[White](#)
[Black](#)

Lotus genuine product

SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits	
Power	11 W	
Colour Temperature	2700 3000 3500 4000 5000	
Light Output White Trim	715 737 762 760 718	
Light Output Black Trim	423 433 446 443 417	
Beam Angle	90°	
CRI	90 +	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG	
Approved Location	Insulated Ceiling & Wet Locations	
IP Rating	IP 54	
Air Tight & Type IC	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 36,000 Hours	
Certification	c UL us	
Warranty	5 Year	

ACCESSORIES



[4 1/8" Hole Flanged with Hanger Bars model # FRP4](#)



[26" Long Flat Rough-In Plate model # RIP414](#)



[13" Long Flat Rough-In Plate model # MP4-2](#)



[13" Long Flanged Rough-In Plate model # MP4](#)



Low Volage Extension Cables 10 ft FT4 / CMR rated
[model # EXC10-5CCT](#)



Goof Ring OD 5 3/4"
[White model # GR4](#) [Black model # GR4-BK](#)



Emergency Driver 8W 120-347V input
[model # BLD-HM08D-YY](#)

COMPLIANCE



Type IC
Air-Tight
Wet Location

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON