



LED-2-S15W

2" Round / Square Recessed LED 15W High Output Designer Series

Project: _____

Location: _____

Trim: _____ Reflector: _____ Qty: _____

Notes: _____

DESCRIPTION

2" Recessed LED With Integral Driver In Connection Box
Interchangeable Reflectors, Trims & Lens Available

FEATURES & BENEFITS

- Round, Square & Specialty** trims - designer series fixture
- 1000 lm** with **CRI 90+** for True Color Rendering
- 27K, 30K, 40K, 50K** field selectable & **Dim to Warm 3000-1800K** options
- Beam options: **38°** (standard), **24° & 60°** available as adder
- 4 3/8" Deep** - Install Where Ceiling Space Is Limited
- Type IC Rated** - No Housing Required
- Driver Inside Connection Box** - No Junction Box Needed

SPECIFICATION	
Applications	Commercial & High End Residential
Power	15 W
Color Temperature (K)	2700 3000 4000 5000 5CCT: 27K-30K-35K-40K-50K 3018
Light Output (lm)	980 1000 1020 820-880-960-1000-960 800
Halogen Equivalent	100 W
Beam Angle	38° standard 24° & 60° optional
CRI	90 +
Default Driver	120V AC Triac Dimmable
Optional Driver	120-347V AC 0-10V Dimmable
J-Box Volume	6.53 in ³ / 2 in 2 out 12AWG
Approved Location	Insulated Ceiling & Damp Locations / Wet with 2RST trim
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, T24
Warranty	5 Year

Reflectors



- 2RRWH** White
- 2RRBK** Black
- 2RRAK** Alzak
- 2RRBZ** Bronze
- 2RRCH** Chrome
- 2RRDM** Diamond

Round Trims



- 2RTWH** White
- 2RTBK** Black
- 2RTBN** Brushed Nickel
- 2RTBZ** Bronze
- 2RTCP** Copper
- 2RTCH** Chrome

Square Trims



- 2STWH** White
- 2STBK** Black
- 2STBN** Brushed Nickel
- 2STBZ** Bronze
- 2STCP** Copper
- 2STCH** Chrome

Specialty Trims - in stock White & 2 Black, other colors available by custom order




- 2RPH** Pinhole
- 2RSA** Slot Aperture
- 2RWW** Wall Wash
- 2RSH** Square Hole
- 2RST** Shower Trim
- 2RPH-BK** Black PH & ST
- 2RST-BK** Black PH & ST

ORDERING GUIDE	CCT	Reflector	Trim	Beam Angle
LED-2-S15W	- xxK	- 2RRxx	- 2xxx	blank for 38°
Example:	27 30 40 50K 3018			-24D for 24°
LED-2-S15W	- 30K	- 2RRWH	- 2RTWH	-60D for 60°
	3000K	Reflector WHite	Round Trim WHite	38° beam

Default beam angle is 38°, Optional are 24° & 60°

DIMENSIONS: ID 1 7/8" ; OD 3 1/8" ; Cut Out Needed For Driver 2 3/4"
Ceiling Clearance Required: 4 1/2" 120V Triac Dim Driver Included

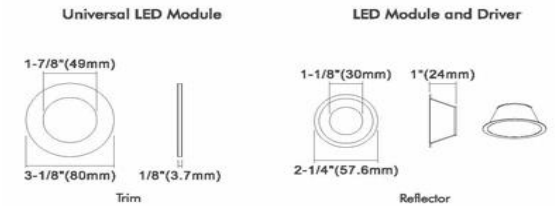

ACCESSORIES

Sold Separately



[Flanged Mounting Plate with bars model FRP212](#)

[13" Mounting Plate model MP234](#)

[26" Rough-In Plates - model # RIP212](#)

[Jumper Cables for single CCT & DTW model JC10](#)

[Jumper Cables for 5 CCT model JC-5CCT-10](#)

[Goof Ring OD 4 1/2" White # GR3 Black # GR3-BK](#)

0-10V Dimmable driver 120-347V

[for 5CCT model HBL015-AW-10-01A-5CS](#)

[for single CCT & DTW model HBL015-AW-10-01L](#)

Emergency Driver 8W 120-347V input

[model # BLD-HM08D-YYY](#)