



DESCRIPTION

2" Recessed LED With Integral Driver In Connection Box
Interchangeable Reflectors, Trims & Lens Available

FEATURES & BENEFITS

Round, Square & Specialty trims - designer series fixture

27K, 30K, 40K, 5CCT field selectable & **Dim to Warm 3000-1800K** options

CRI 90+ for True Color Rendering

2 3/8" Thick - Install Where Ceiling Space Is Limited

Beam options: **38°**(standard), **24°** & **60°** available as adder


Type IC Rated - No Housing Required

Fast & Easy To Install - Save On Labor

Driver Inside Connection Box - No Junction Box Needed

DIMENSIONS: ID 1 7/8" ; OD 3 1/8" ; Cut Out Needed For Driver 2 1/2"

Ceiling Clearance Required: 5 1/2" 120V Triac Dim Driver Included

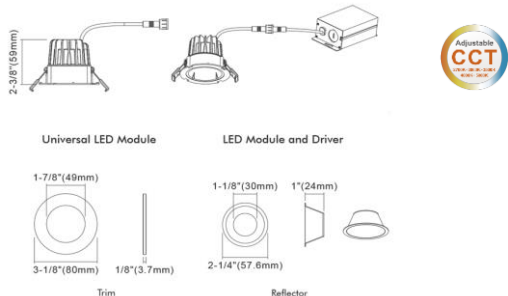

ACCESSORIES

Sold Separately



[Flanged Mounting Plate with bars model FRP212](#)



[13" Mounting Plate model MP234](#)



[26" Rough-In Plates - model # RIP212](#)



[Jumper Cables for single CCT model JC10](#)

[Jumper Cables for 5 CCT model JC-5CCT-10](#)



[Goof Ring OD 4 1/2" White # GR3 Black # GR3-BK](#)



[Emergency Driver 8W 120-347V input model # BLD-HM08D-YYY](#)

ORDERING GUIDE

	CCT	Reflector	Trim	Beam Angle
LED-2-S8W2	- xxK	- 2RRxx	- 2xxx	blank for 38°
27 30 40 5CCT 3018				-24D for 24°
Example:				-60D for 60°

LED-2-S8W2	- 30K	- 2RRWH	- 2RTWH	
	3000K	Reflector	Round Trim	38° beam
		White	White	



Default beam angle is 38°, Optional are 24° & 60°

LED-2-S8W2

2" Round / Square Recessed LED 8W Designer Series

Project:

Location:

Trim:

Reflector:

Qty:

Notes:

SPECIFICATION

Applications	Commercial & High End Residential
Energy Used	8 W
Color Temperature (K)	2700 3000 4000 5CCT: 27K-30K-35K-40K-50K
Light Output (lm)	580 600 620 520 - 560 - 610 - 620 - 630
Halogen Equivalent	50 W
Beam Angle	38° (standard), 24° & 60° available as adder
CRI	90 +
Driver Input	120V AC 50/60 Hz
J-Box Volume	6.53 in ³ / 2 in 2 out 12AWG
Dimming	TRIAC Dimmers 10% - 100%
Approved Location	Insulated Ceiling & Damp Locations / Wet with 2RST trim
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, T24
Warranty	5 Year

Reflectors



Round Trims



SquareTrims



Specialty Trims - in stock White & 3 Black, other colors available by custom order



Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON